

Head First



Discover the secrets of the C coding gurus



Avoid embarrassing pointer mistakes







Learn how make can change your life

See how variadic functions helped Sue be more flexible



Build a retro classic arcade game

O'REILLY®

David Griffiths & Dawn Griffiths

www.it-ebooks.info



Advance Praise for Head First C

"Head First C could quite possibly turn out to be the best C book of all time. I don't say that lightly. I could easily see this become the standard C textbook for every college C course. Most books on programming follow a fairly predictable course through keywords, control-flow constructs, syntax, operators, data types, subroutines, etc. These can serve as a useful reference, as well as a fairly academic introduction to the language. This book, on the other hand, takes a totally different approach. It teaches you how to be a real C programmer. I wish I had had this book 15 years ago!"

- Dave Kitabjian, Director of Software Development, NetCarrier Telecom

"Head First C is an accessible, light-hearted introduction to C programming, in the classic Head First style. Pictures, jokes, exercises, and labs take the reader gently but steadily through the fundamentals of C—including arrays, pointers, structs, and functions—before moving into more advanced topics in Posix and Linux system programming, such as processes and threads."

- Vince Milner, software developer

Praise for other Head First books

"Kathy and Bert's *Head First Java* transforms the printed page into the closest thing to a GUI you've ever seen. In a wry, hip manner, the authors make learning Java an engaging 'what're they gonna do next?' experience."

-Warren Keuffel, Software Development Magazine

"Beyond the engaging style that drags you forward from know-nothing into exalted Java warrior status, Head First Java covers a huge amount of practical matters that other texts leave as the dreaded 'exercise for the reader...' It's clever, wry, hip, and practical—there aren't a lot of textbooks that can make that claim and live up to it while also teaching you about object serialization and network launch protocols. "

— Dr. Dan Russell, Director of User Sciences and Experience Research, IBM Almaden Research Center; artificial intelligence instructor, Stanford University

"It's fast, irreverent, fun, and engaging. Be careful—you might actually learn something!"

Ken Arnold, former Senior Engineer at Sun Microsystems;
 coauthor (with James Gosling, creator of Java),
 The Java Programming Language

"I feel like a thousand pounds of books have just been lifted off of my head."

- Ward Cunningham, inventor of the Wiki and founder of the Hillside Group

"Just the right tone for the geeked-out, casual-cool guru coder in all of us. The right reference for practical development strategies—gets my brain going without having to slog through a bunch of tired, stale professor-speak."

 Travis Kalanick, founder of Scour and Red Swoosh; member of the MIT TR100

"There are books you buy, books you keep, books you keep on your desk, and thanks to O'Reilly and the Head First crew, there is the penultimate category, Head First books. They're the ones that are dog-eared, mangled, and carried everywhere. *Head First SQL* is at the top of my stack. Heck, even the PDF I have for review is tattered and torn."

- Bill Sawyer, ATG Curriculum Manager, Oracle

"This book's admirable clarity, humor, and substantial doses of clever make it the sort of book that helps even nonprogrammers think well about problem solving."

— Cory Doctorow, coeditor of Boing Boing; author, Down and Out in the Magic Kingdom and Someone Comes to Town, Someone Leaves Town

Praise for other Head First books

"I received the book yesterday and started to read it...and I couldn't stop. This is definitely très 'cool.' It is fun, but they cover a lot of ground, and they are right to the point. I'm really impressed."

- Erich Gamma, IBM Distinguished Engineer and coauthor of Design Patterns

"One of the funniest and smartest books on software design I've ever read."

- Aaron LaBerge, VP Technology, ESPN.com

"What used to be a long trial-and-error learning process has now been reduced neatly into an engaging paperback."

- Mike Davidson, CEO, Newsvine, Inc.

"Elegant design is at the core of every chapter here, each concept conveyed with equal doses of pragmatism and wit."

- Ken Goldstein, Executive Vice President, Disney Online

"I ♥ *Head First HTML with CSS & XHTML*—it teaches you everything you need to learn in a 'fun coated' format."

- Sally Applin, UI designer and artist

"Usually when reading through a book or article on design patterns, I'd have to occasionally stick myself in the eye with something just to make sure I was paying attention. Not with this book. Odd as it may sound, this book makes learning about design patterns fun.

"While other books on design patterns are saying 'Bueller...Bueller...Bueller...,' this book is on the float belting out 'Shake it up, baby!"

— Eric Wuehler

"I literally love this book. In fact, I kissed this book in front of my wife."

— Satish Kumar

Other related books from O'Reilly

C in a Nutshell

Practical C Programming

C Pocket Reference

Algorithms with C

Secure Programming Cookbook for C and C++

Other books in O'Reilly's Head First series

Head First Programming

Head First Rails

Head First Java™

Head First Object-Oriented Analysis and Design (OOA&D)

Head First HTML5 Programming

Head First HTML with CSS and XHTML

Head First Design Patterns

Head First Servlets and JSP

Head First EJB

Head First PMP

Head First SQL

Head First Software Development

Head First JavaScript

Head First Ajax

Head First Statistics

Head First 2D Geometry

Head First Algebra

Head First PHP & MySQL

Head First Mobile Web

Head First Web Design

Head First C

Wouldn't it be dreamy if there were a book on C that was easier to understand than the space shuttle flight manual? I guess it's just a fantasy...



David Griffiths

Dawn Griffiths



Beijing • Cambridge • Farnham • Köln • Sebastopol • Tokyo

Head First C

by David Griffiths and Dawn Griffiths

Copyright © 2012 David Griffiths and Dawn Griffiths. All rights reserved.

Printed in the United States of America.

Published by O'Reilly Media, Inc., 1005 Gravenstein Highway North, Sebastopol, CA 95472.

O'Reilly Media books may be purchased for educational, business, or sales promotional use. Online editions are also available for most titles (http://my.safaribooksonline.com). For more information, contact our corporate/institutional sales department: (800) 998-9938 or corporate@oreilly.com.

Series Creators: Kathy Sierra, Bert Bates

Editor: Brian Sawyer

Cover Designer: Karen Montgomery

Production Editor: Teresa Elsey

Production Services: Rachel Monaghan
Indexer: Ellen Troutman Zaig
Page Viewers: Mum and Dad, Carl

Printing History:

April 2012: First Edition.





The O'Reilly logo is a registered trademark of O'Reilly Media, Inc. The *Head First* series designations, *Head First C*, and related trade dress are trademarks of O'Reilly Media, Inc.

Many of the designations used by manufacturers and sellers to distinguish their products are claimed as trademarks. Where those designations appear in this book, and O'Reilly Media, Inc., was aware of a trademark claim, the designations have been printed in caps or initial caps.


While every precaution has been taken in the preparation of this book, the publisher and the authors assume no responsibility for errors or omissions, or for damages resulting from the use of the information contained herein.

No kittens were harmed in the making of this book. Really.

RepKover™ This book uses RepKover™, a durable and flexible lay-flat binding.

ISBN: 978-1-449-39991-7

[M]



www.it-ebooks.info

Authors of Head First C



David Griffiths began programming at age 12, when he saw a documentary on the work of Seymour Papert. At age 15, he wrote an implementation of Papert's computer language LOGO. After studying pure mathematics at university, he began writing code for computers and magazine articles for humans. He's worked as an agile coach, a developer, and a garage attendant, but not in that order. He can write code in over 10 languages and prose in just one, and when not writing, coding, or coaching, he spends much of his spare time traveling with his lovely wife—and coauthor—Dawn.

Before writing *Head First C*, David wrote two other Head First books: *Head First Rails* and *Head First Programming*.

You can follow David on Twitter at http://twitter.com/dogriffiths.

Dawn Griffiths started life as a mathematician at a top UK university, where she was awarded a first-class honors degree in mathematics. She went on to pursue a career in software development and has over 15 years experience working in the IT industry.

Before joining forces with David on *Head First C*, Dawn wrote two other Head First books (*Head First Statistics* and *Head First 2D Geometry*) and has also worked on a host of other books in the series.

When Dawn's not working on Head First books, you'll find her honing her Tai Chi skills, running, making bobbin lace, or cooking. She also enjoys traveling and spending time with her husband, David.

Table of Contents (Summary)


	Intro	xxvii
1	Getting Started with C: Diving in	1
2	Memory and Pointers: What are you pointing at?	41
2.5	Strings: String theory	83
3	Creating Small Tools: Do one thing and do it well	103
4	Using Multiple Source Files: Break it down, build it up	157
	C Lab 1: Arduino	207
5	Structs, Unions, and Bitfields: Rolling your own structures	217
6	Data Structures and Dynamic Memory: Building bridges	267
7	Advanced Functions: Turn your functions up to 11	311
8	Static and Dynamic Libraries: Hot-swappable code	351
	C Lab 2: OpenCV	389
9	Processes and System Calls: Breaking boundaries	397
10	Interprocess Communication: It's good to talk	429
11	Sockets and Networking: There's no place like 127.0.0.1	467
12	Threads: It's a parallel world	501
	C Lab 3: Blasteroids	523
i	Leftovers: The top ten things (we didn't cover)	539
ii	C Topics: Revision roundub	553

Table of Contents (the real thing)

Intro

Your brain on C. Here *you* are trying to *learn* something, while here your *brain* is, doing you a favor by making sure the learning doesn't *stick*. Your brain's thinking, "Better leave room for more important things, like which wild animals to avoid and whether naked snowboarding is a bad idea." So how *do* you trick your brain into thinking that your life depends on knowing C?

Who is this book for?	xxviii
We know what you're thinking	xxix
Metacognition	xxxi
Bend your brain into submission	xxxiii
Read me	xxxiv
The technical review team	xxxvi
Acknowledgments	xxxvii

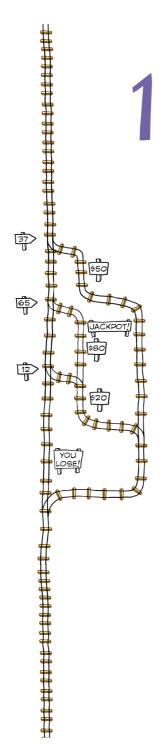

getting started with C

Diving in

Want to get inside the computer's head?

Need to write **high-performance code** for a new game? Program an **Arduino**? Or use that advanced **third-party library** in your iPhone app? If so, then C's here to help. C works at a **much lower level** than most other languages, so understanding C gives you a much better idea of **what's really going on**. C can even help you better understand other languages as well. So dive in and grab your compiler, and you'll soon get started in no time.

C is a language for small, fast programs	2
But what does a complete C program look like?	5
But how do you run the program?	9
Two types of command	14
Here's the code so far	15
Card counting? In C?	17
There's more to booleans than equals	18
What's the code like now?	25
Pulling the ol' switcheroo	26
Sometimes once is not enough	29
Loops often follow the same structure	30
You use break to break out	31
Your C Toolbox	40


memory and pointers

What are you pointing at?

2

If you really want to kick butt with C, you need to understand how C handles memory.

The C language gives you a lot more *control* over how your program uses the **computer's memory**. In this chapter, you'll strip back the covers and see exactly what happens when you **read and write variables**. You'll learn **how arrays work**, how to avoid some **nasty memory SNAFUs**, and most of all, you'll see how **mastering pointers and memory addressing** is key to becoming a kick-ass C programmer.

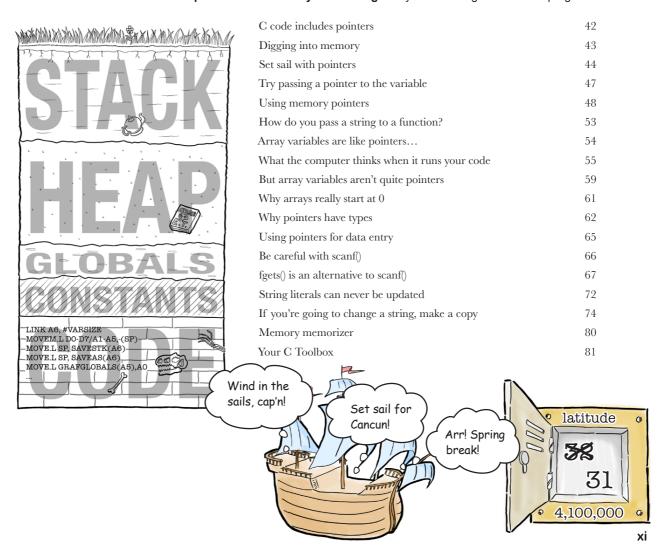

www.it-ebooks.info

strings

2.5

String theory

There's more to strings than reading them.

You've seen how strings in C are actually char arrays but what does C allow you to do with them? That's where **string.h** comes in. **string.h** is part of the C Standard Library that's dedicated to **string manipulation**. If you want to **concatenate** strings together, **copy** one string to another, or **compare** two strings, the functions in **string.h** are there to help. In this chapter, you'll see how to create an **array of strings**, and then take a close look at how to **search within strings** using the **strstr()** function.

Desperately seeking Frank	84
Create an array of arrays	85
Find strings containing the search text	86
Using the strstr() function	89
It's time for a code review	94
Array of arrays vs. array of pointers	98
Your C Toolbox	101



creating small tools


3

Do one thing and do it well

Every operating system includes small tools.

Small tools written in C perform **specialized small tasks**, such as reading and writing files, or filtering data. If you want to perform more complex tasks, you can even *link several tools together*. But how are these small tools built? In this chapter, you'll look at the building blocks of creating small tools. You'll learn how to control **command-line options**, how to manage **streams of information**, and **redirection**, getting tooled up in no time.

Small tools can solve big problems	104
Here's how the program should work	108
But you're not using files	109
You can use redirection	110
Introducing the Standard Error	120
By default, the Standard Error is sent to the display	121
fprintf() prints to a data stream	122
Let's update the code to use fprintf()	123
Small tools are flexible	128
Don't change the geo2json tool	129
A different task needs a different tool	130
Connect your input and output with a pipe	131
The bermuda tool	132
But what if you want to output to more than one file?	137
Roll your own data streams	138
There's more to main()	141
Let the library do the work for you	149
Your C Toolboy	156

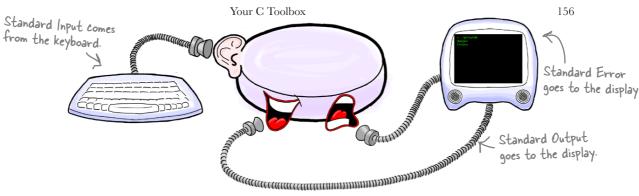


xiii

using multiple source files

Break it down, build it up

If you create a big program, you don't want a big source file.

Can you imagine how difficult and time-consuming a single source file for an enterprise-level program would be to maintain? In this chapter, you'll learn how C allows you to break your source code into **small**, **manageable chunks** and then rebuild them into **one huge program**. Along the way, you'll learn a bit more about **data type subtleties** and get to meet your new best friend: **make**.

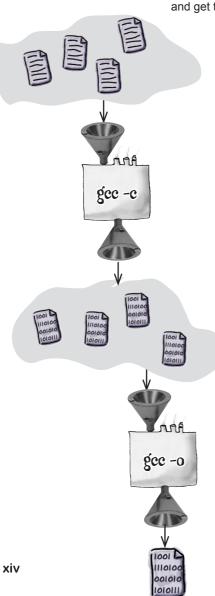

Your quick guide to data types	102
Don't put something big into something small	163
Use casting to put floats into whole numbers	164
Oh noit's the out-of-work actors	168
Let's see what's happened to the code	169
Compilers don't like surprises	171
Split the declaration from the definition	173
Creating your first header file	174
If you have common features	182
You can split the code into separate files	183
Compilation behind the scenes	184
The shared code needs its own header file	186
It's not rocket scienceor is it?	189
Don't recompile every file	190
First, compile the source into object files	191
It's hard to keep track of the files	196
Automate your builds with the make tool	198
How make works	199
Tell make about your code with a makefile	200
Liftoff!	205
Your C Toolbox	206

www.it-ebooks.info

CLab 1

Arduino

Ever wished your plants could tell you when they need watering? Well, with an Arduino, they can! In this lab, you'll build an Arduino-powered plant monitor, all coded in C.



structs, unions, and bitfields


5

Rolling your own structures

Most things in life are more complex than a simple number.

So far, you've looked at the basic data types of the C language, but what if you want to go beyond numbers and pieces of text, and model things in the real world? structs allow you to model real-world complexities by writing your own structures. In this chapter, you'll learn how to combine the basic data types into structs, and even handle life's uncertainties with unions. And if you're after a simple yes or no, bitfields may be just what you need.

Sometimes you need to hand around a lot of data	218
Cubicle conversation	219
Create your own structured data types with a struct	220
Just give them the fish	221
Read a struct's fields with the "." operator	222
Can you put one struct inside another?	227
How do you update a struct?	236
The code is cloning the turtle	238
You need a pointer to the struct	239
(*t).age vs. *t.age	240
Sometimes the same type of thing needs different types of data	246
A union lets you reuse memory space	247
How do you use a union?	248
An enum variable stores a symbol	255
Sometimes you want control at the bit level	261
Bitfields store a custom number of bits	262
Your C Toolbox	266



This is Myrtle ...



www.it-ebooks.info

data structures and dynamic memory


Do you need flexible storage?

Building bridges

Sometimes, a single struct is simply not enough.

To model complex data requirements, you often need to **link structs together**. In this chapter, you'll see how to use **struct pointers** to connect custom data types into **large, complex data structures**. You'll explore *key principles* by creating **linked lists**. You'll also see how to make your data structures cope with flexible amounts of data by **dynamically allocating memory on the heap**, and freeing it up when you're done. And if good housekeeping becomes tricky, you'll also learn how **valgrind** can help.

Do you need nemore storage.	
Linked lists are like chains of data	269
Linked lists allow inserts	270
Create a recursive structure	271
Create islands in C	272
Inserting values into the list	273
Use the heap for dynamic storage	278
Give the memory back when you're done	279
Ask for memory with malloc()	280
Let's fix the code using the strdup() function	286
Free the memory when you're done	290
An overview of the SPIES system	300
Software forensics: using valgrind	302
Use valgrind repeatedly to gather more evidence	303
Look at the evidence	304
The fix on trial	307
Your C Toolbox	309

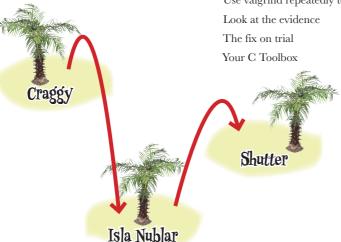

32 bytes of data at location 4,204,853 on the heap

xvii


advanced functions

Turn your functions up to 11

Basic functions are great, but sometimes you need more.

So far, you've focused on the basics, but what if you need even more *power* and *flexibility* to achieve what you want? In this chapter, you'll see how to **up your code's IQ** by **passing functions** as **parameters**. You'll find out how to **get things sorted with comparator functions**. And finally, you'll discover how to make your code *super stretchy* with **variadic functions**.

Looking for Mr. Right	312
Pass code to a function	316
You need to tell find() the name of a function	317
Every function name is a pointer to the function	318
but there's no function data type	319
How to create function pointers	320
Get it sorted with the C Standard Library	325
Use function pointers to set the order	326
Automating the Dear John letters	334
Create an array of function pointers	338
Make your functions streeeeeetchy	343
Your C Toolbox	350

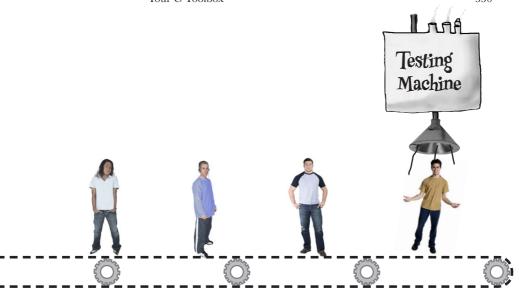

static and dynamic libraries


8

Hot-swappable code

You've already seen the power of standard libraries.


Now it's time to use that power for your *own* code. In this chapter, you'll see how to create your **own libraries** and **reuse the same code across several programs**. What's more, you'll learn how to share code at runtime with **dynamic libraries**. You'll learn the secrets of the *coding gurus*. And by the end of the chapter, you'll be able to write code that you can scale and manage simply and efficiently.

Code you can take to the bank	352
Angle brackets are for standard headers	354
But what if you want to share code?	355
Sharing .h header files	356
Share .o object files by using the full pathname	357
An archive contains .o files	358
Create an archive with the ar command	359
Finally, compile your other programs	360
The Head First Gym is going global	365
Calculating calories	366
But things are a bit more complex	369
Programs are made out of lots of pieces	370
Dynamic linking happens at runtime	372
Can you link .a at runtime?	373
First, create an object file	374
What you call your dynamic library depends on your platform	375
Your C Toolbox	387





Is it a bird? Is it a plane? No, it's a relocatable object file with metadata.



C Lab 2 OpenCV

Imagine if your computer could keep an eye on your house while you're out, and tell you who's been prowling around. In this lab, you'll build a C-powered intruder detector using the cleverness of OpenCV.




processes and system calls

Breaking boundaries

It's time to think outside the box.

You've already seen that you can build complex applications by connecting small tools together on the command line. But what if you want to *use other programs* from inside your own code? In this chapter, you'll learn how to use **system services** to create and control **processes**. That will give your programs access to *email*, the *Web*, and *any other tool you've got installed*. By the end of the chapter, you'll have the power to go **beyond C**.

System calls are your hotline to the OS	398
Then someone busted into the system	402
Security's not the only problem	403
The exec() functions give you more control	404
There are many exec() functions	405
The array functions: execv(), execvp(), execve()	406
Passing environment variables	407
Most system calls go wrong in the same way	408
Read the news with RSS	416
exec() is the end of the line for your program	420
Running a child process with fork() + exec()	421
Your C Toolbox	427

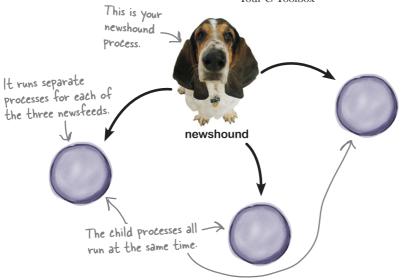

interprocess communication

\cap

It's good to talk

Creating processes is just half the story.

What if you want to *control* the process once it's running? What if you want to *send it data*? Or *read its output*? **Interprocess communication** lets processes work together to *get the job done*. We'll show you how to multiply the **power** of your code by letting it *talk* to other programs on your system.

```
Redirecting input and output
                                                                     430
A look inside a typical process
                                                                     431
Redirection just replaces data streams
                                                                     432
fileno() tells you the descriptor
                                                                     433
                                                                     438
Sometimes you need to wait...
Stay in touch with your child
                                                                     442
Connect your processes with pipes
                                                                     443
Case study: opening stories in a browser
                                                                     444
In the child
                                                                     445
In the parent
                                                                     445
Opening a web page in a browser
                                                                     446
The death of a process
                                                                     451
Catching signals and running your own code
                                                                     452
sigactions are registered with sigaction()
                                                                     453
Rewriting the code to use a signal handler
                                                                     454
Use kill to send signals
                                                                     457
Sending your code a wake-up call
                                                                     458
Your C Toolbox
                                                                     466
```

```
#include <stdio.h>

int main()
{
   char name[30];
   printf("Enter your name: ");
   fgets(name, 30, stdin);
   printf("Hello %s\n", name);
   return 0;
}

File Edit Window Help
> ./greetings
Enter your name: ^
```

If you press Ctrl-C, the program stops running. But why?

xxii

sockets and networking


11

There's no place like 127.0.0.1

Programs on different machines need to talk to each other.

You've learned how to use I/O to communicate with files and how processes on the same machine can communicate with each other. Now you're going to *reach out to the rest of the world*, and learn how to write C programs that can talk to other programs across the network and across the *world*. By the end of this chapter, you'll be able to create programs that behave as servers and programs that behave as clients.

The Internet knock-knock server 468 Knock-knock server overview 469 BLAB: how servers talk to the Internet 470 A socket's not your typical data stream 472 Sometimes the server doesn't start properly 476 Why your mom always told you to check for errors 477 Reading from the client 478 The server can only talk to one person at a time 485 You can fork() a process for each client 486 Writing a web client 490 491 Clients are in charge Create a socket for an IP address 492 getaddrinfo() gets addresses for domains 493 Your C Toolbox 500

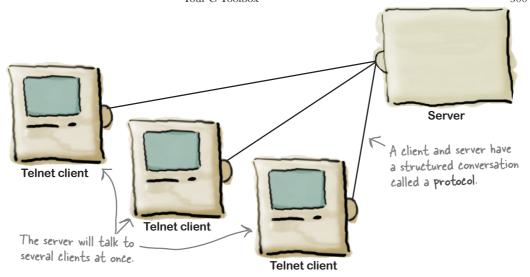

xxiii

www.it-ebooks.info

threads


12

It's a parallel world

Programs often need to do several things at the same time.

POSIX threads can make your code more responsive by **spinning off several pieces of code to run in parallel**. But be careful! Threads are powerful tools, but you don't want them crashing into each other. In this chapter, you'll learn how to put up **traffic signs** and **lane markers** that will **prevent a code pileup**. By the end, you will know how to **create POSIX threads** and how to use **synchronization mechanisms** to **protect the integrity of sensitive data**.

502 Tasks are sequential...or not... ...and processes are not always the answer 503 Simple processes do one thing at a time 504 Employ extra staff: use threads 505 How do you create threads? 506 Create threads with pthread_create 507 The code is not thread-safe 512 You need to add traffic signals 513 Use a mutex as a traffic signal 514

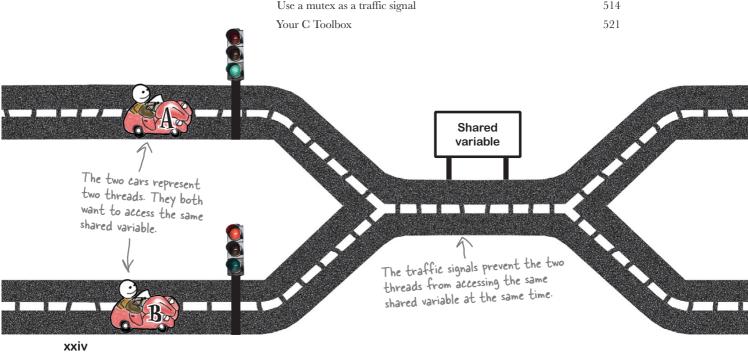

www.it-ebooks.info

C Lab 3

Blasteroids

In this lab, you're going to pay tribute to one of the most popular and long-lived video games of them all. It's time to write Blasteroids!




leftovers



The top ten things (we didn't cover)

Even after all that, there's still a bit more.






540
542
543
544
545
546
548
550
551
552

c topics

Revision roundup

Ever wished all those great C facts were in one place?


This is a roundup of all the C topics and principles we've covered in the book. Take a look at them, and see if you can remember them all. Each fact has the chapter it came from alongside it, so it's easy for you to refer back if you need a reminder. You might even want to cut these pages out and tape them to your wall.



xxvi

how to use this book

Intro

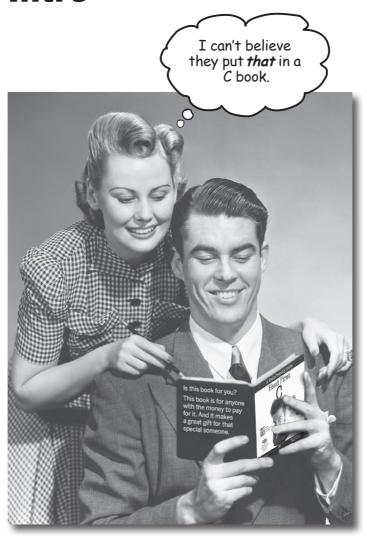

In this section, we answer the burning question: "So why DID they put that in a C book?"

Who is this book for?

If you can answer "yes" to all of these:

- Do you already know how to program in another programming language?
- Do you want to master C, create the next big thing in software, make a small fortune, and retire to your own private island?
- Do you prefer actually doing things and applying the stuff you learn over listening to someone in a lecture rattle on for hours on end?

OK, maybe that one's a little — far-fetched. But, you gotta start somewhere, right?

this book is for you.

Who should probably back away from this book?

If you can answer "yes" to any of these:

- Are you looking for a quick introduction or reference book to C?
- Would you rather have your toenails pulled out by 15 screaming monkeys than learn something new? Do you believe a C book should cover everything and if it bores the reader to tears in the process, then so much the better?

this book is **not** for you.

ENote from Marketing: this book is for anyone with a credit card... we'll accept a check, too.]

xxviii

We know what you're thinking

"How can this be a serious C book?"

"What's with all the graphics?"

"Can I actually learn it this way?"

We know what your brain is thinking

Your brain craves novelty. It's always searching, scanning, waiting for something unusual. It was built that way, and it helps you stay alive.

So what does your brain do with all the routine, ordinary, normal things you encounter? Everything it *can* to stop them from interfering with the brain's *real* job—recording things that *matter*. It doesn't bother saving the boring things; they never make it past the "this is obviously not important' filter.

How does your brain *know* what's important? Suppose you're out for a day hike and a tiger jumps in front of you—what happens inside your head and body?

Neurons fire. Emotions crank up. Chemicals surge.

And that's how your brain knows...

This must be important! Don't forget it!

But imagine you're at home or in a library. It's a safe, warm, tiger-free zone. You're studying. Getting ready for an exam. Or trying to learn some tough technical topic your boss thinks will take a week, ten days at the most.

Just one problem. Your brain's trying to do you a big favor. It's trying to make sure that this *obviously* unimportant content doesn't clutter up scarce resources. Resources that are better spent storing the really *big* things. Like tigers. Like the danger of fire. Like how you should never have posted those party photos on your Facebook page. And there's no simple way to tell your brain, "Hey brain, thank you very much, but no matter how dull this book is, and how little I'm registering on the emotional Richter scale right now, I really *do* want you to keep this stuff around."



Your brain thinks THIS is important.



We think of a "Head First" reader as a learner.

So what does it take to *learn* something? First, you have to *get* it, then make sure you don't *forget* it. It's not about pushing facts into your head. Based on the latest research in cognitive science, neurobiology, and educational psychology, *learning* takes a lot more than text on a page. We know what turns your brain on.

Some of the Head First learning principles:

Make it visual. Images are far more memorable than words alone, and make learning much more effective (up to 89% improvement in recall and transfer studies). It also makes things more understandable. **Put the words within or near the graphics** they relate to, rather than on the bottom or on another page, and learners will be up to *twice* as likely to solve problems related to the content.

Use a conversational and personalized style. In recent studies, students performed up to 40% better on post-learning tests if the content spoke directly to the reader, using a first-person, conversational style rather than taking a formal tone. Tell stories instead of lecturing. Use casual language. Don't take yourself too seriously. Which would *you* pay more attention to: a stimulating dinner-party companion, or a lecture?

Get the learner to think more deeply. In other words, unless you actively flex your neurons, nothing much happens in your head. A reader has to be motivated, engaged, curious, and inspired to solve problems, draw conclusions, and generate new knowledge. And for that, you need challenges, solve problems, draw conclusions, and generate new knowledge. And for that, you need challenges, solve problems, draw conclusions, and generate new knowledge. And for that, you need challenges, solve problems, and thought-provoking questions, and activities that involve both sides of the brain and multiple senses.

Get—and keep—the reader's attention. We've all had the "I really want to learn this, but I can't stay awake past page one" experience. Your brain pays attention to things that are out of the ordinary, interesting, strange, eye-catching, unexpected. Learning a new, tough, technical topic doesn't have to be boring. Your brain will learn much more quickly if it's not.

Touch their emotions. We now know that your ability to remember something is largely dependent on its emotional content. You remember what you care about. You remember when you *feel* something. No, we're not talking heart-wrenching stories about a boy and his dog. We're talking emotions like surprise, curiosity, fun, "what the...?", and the feeling of "I rule!" that comes when you solve a puzzle, learn something everybody else thinks is hard, or realize you know something that "I'm more technical than thou" Bob from Engineering *doesn't*.


Metacognition: thinking about thinking

If you really want to learn, and you want to learn more quickly and more deeply, pay attention to how you pay attention. Think about how you think. Learn how you learn.

Most of us did not take courses on metacognition or learning theory when we were growing up. We were *expected* to learn, but rarely *taught* to learn.

But we assume that if you're holding this book, you really want to learn how to program in C. And you probably don't want to spend a lot of time. If you want to use what you read in this book, you need to *remember* what you read. And for that, you've got to *understand* it. To get the most from this book, or *any* book or learning experience, take responsibility for your brain. Your brain on *this* content.

The trick is to get your brain to see the new material you're learning as Really Important. Crucial to your well-being. As important as a tiger. Otherwise, you're in for a constant battle, with your brain doing its best to keep the new content from sticking.



There's the slow, tedious way, or the faster, more effective way. The slow way is about sheer repetition. You obviously know that you *are* able to learn and remember even the dullest of topics if you keep pounding the same thing into your brain. With enough repetition, your brain says, "This doesn't *feel* important to him, but he keeps looking at the same thing *over* and *over*, so I suppose it must be."

The faster way is to do **anything that increases brain activity**, especially different *types* of brain activity. The things on the previous page are a big part of the solution, and they're all things that have been proven to help your brain work in your favor. For example, studies show that putting words *within* the pictures they describe (as opposed to somewhere else in the page, like a caption or in the body text) causes your brain to try to makes sense of how the words and picture relate, and this causes more neurons to fire. More neurons firing = more chances for your brain to *get* that this is something worth paying attention to, and possibly recording.

A conversational style helps because people tend to pay more attention when they perceive that they're in a conversation, since they're expected to follow along and hold up their end. The amazing thing is, your brain doesn't necessarily *care* that the "conversation" is between you and a book! On the other hand, if the writing style is formal and dry, your brain perceives it the same way you experience being lectured to while sitting in a roomful of passive attendees. No need to stay awake.

But pictures and conversational style are just the beginning...

I wonder how
I can trick my brain
into remembering
this stuff...



Here's what WE did:

We used *pictures*, because your brain is tuned for visuals, not text. As far as your brain's concerned, a picture really *is* worth a thousand words. And when text and pictures work together, we embedded the text *in* the pictures because your brain works more effectively when the text is *within* the thing it refers to, as opposed to in a caption or buried in the body text somewhere.

We used **redundancy**, saying the same thing in *different* ways and with different media types, and *multiple senses*, to increase the chance that the content gets coded into more than one area of your brain.

We used concepts and pictures in **unexpected** ways because your brain is tuned for novelty, and we used pictures and ideas with at least *some* **emotional** content, because your brain is tuned to pay attention to the biochemistry of emotions. That which causes you to *feel* something is more likely to be remembered, even if that feeling is nothing more than a little **humor**, **surprise**, or **interest**.

We used a personalized, *conversational style*, because your brain is tuned to pay more attention when it believes you're in a conversation than if it thinks you're passively listening to a presentation. Your brain does this even when you're *reading*.

We included more than 80 *activities*, because your brain is tuned to learn and remember more when you *do* things than when you *read* about things. And we made the exercises challenging-yet-doable, because that's what most people prefer.

We used *multiple learning styles*, because *you* might prefer step-by-step procedures, while someone else wants to understand the big picture first, and someone else just wants to see an example. But regardless of your own learning preference, *everyone* benefits from seeing the same content represented in multiple ways.

We include content for **both sides of your brain**, because the more of your brain you engage, the more likely you are to learn and remember, and the longer you can stay focused. Since working one side of the brain often means giving the other side a chance to rest, you can be more productive at learning for a longer period of time.

And we included **stories** and exercises that present **more than one point of view**, because your brain is tuned to learn more deeply when it's forced to make evaluations and judgments.

We included *challenges*, with exercises, and by asking *questions* that don't always have a straight answer, because your brain is tuned to learn and remember when it has to *work* at something. Think about it—you can't get your *body* in shape just by *watching* people at the gym. But we did our best to make sure that when you're working hard, it's on the *right* things. That *you're not spending one extra dendrite* processing a hard-to-understand example, or parsing difficult, jargon-laden, or overly terse text.

We used **people**. In stories, examples, pictures, etc., because, well, *you're* a person. And your brain pays more attention to *people* than it does to *things*.

xxxii intro



Here's what YOU can do to bend your brain into submission

So, we did our part. The rest is up to you. These tips are a starting point; listen to your brain and figure out what works for you and what doesn't. Try new things.

Cut this out and stick it on your refrigerator.

Slow down. The more you understand, the less you have to memorize.

Don't just *read*. Stop and think. When the book asks you a question, don't just skip to the answer. Imagine that someone really *is* asking the question. The more deeply you force your brain to think, the better chance you have of learning and remembering.

2 Do the exercises. Write your own notes.

We put them in, but if we did them for you, that would be like having someone else do your workouts for you. And don't just *look* at the exercises. **Use a pencil.** There's plenty of evidence that physical activity *while* learning can increase the learning.

Read "There Are No Dumb Questions."

That means all of them. They're not optional sidebars, *they're part of the core content!* Don't skip them.

Make this the last thing you read before bed. Or at least the last challenging thing.

Part of the learning (especially the transfer to long-term memory) happens *after* you put the book down. Your brain needs time on its own, to do more processing. If you put in something new during that processing time, some of what you just learned will be lost.

Talk about it. Out loud.

Speaking activates a different part of the brain. If you're trying to understand something, or increase your chance of remembering it later, say it out loud. Better still, try to explain it out loud to someone else. You'll learn more quickly, and you might uncover ideas you hadn't known were there when you were reading about it.

6 Drink water. Lots of it.

Your brain works best in a nice bath of fluid. Dehydration (which can happen before you ever feel thirsty) decreases cognitive function.

Listen to your brain.

Pay attention to whether your brain is getting overloaded. If you find yourself starting to skim the surface or forget what you just read, it's time for a break. Once you go past a certain point, you won't learn faster by trying to shove more in, and you might even hurt the process.

R Feel something.

Your brain needs to know that this *matters*. Get involved with the stories. Make up your own captions for the photos. Groaning over a bad joke is *still* better than feeling nothing at all.

Write a lot of code!

There's only one way to learn to program in C: write a lot of code. And that's what you're going to do throughout this book. Coding is a skill, and the only way to get good at it is to practice. We're going to give you a lot of practice: every chapter has exercises that pose a problem for you to solve. Don't just skip over them—a lot of the learning happens when you solve the exercises. We included a solution to each exercise—don't be afraid to peek at the solution if you get stuck! (It's easy to get snagged on something small.) But try to solve the problem before you look at the solution. And definitely get it working before you move on to the next part of the book.

Read me

This is a learning experience, not a reference book. We deliberately stripped out everything that might get in the way of learning whatever it is we're working on at that point in the book. And the first time through, you need to begin at the beginning, because the book makes assumptions about what you've already seen and learned.

We assume you're new to C, but not to programming.

We assume that you've already done some programming. Not a lot, but we'll assume you've already seen things like loops and variables in some other language, like JavaScript. C is actually a pretty advanced language, so if you've never done any programming *at all*, then you might want to read some other book before you start on this one. We'd suggest starting with *Head First Programming*.

You need to install a C compiler on your computer.

Throughout the book, we'll be using the *Gnu Compiler Collection* (gcc) because it's free and, well, we think it's just a pretty darned good compiler. You'll need to make sure you have gcc installed on your machine. The good news is, if you have a *Linux* computer, then you should already have gcc. If you're using a Mac, you'll need to install the Xcode/Developer tools. You can either download these from the Apple *App Store* or by downloading them from Apple. If you're on a Windows machine, you have a couple options. *Cygwin* (http://www.cygwin.com) gives you a complete simulation of a *UNIX* environment, including gcc. But if you want to create programs that will work on Windows plain-and-simple, then you might want to install the *Minimalist GNU for Windows* (MingW) from http://www.mingw.org.

All the code in this book is intended to run across *all* these operating systems, and we've tried hard not to write anything that will only work on one type of computer. Occasionally, there will be some differences, but we'll make sure to point those out to you.

We begin by teaching some basic C concepts, and then we start putting C to work for you right away.

We cover the fundamentals of C in Chapter 1. That way, by the time you make it all the way to Chapter 2, you are creating programs that actually do something real, useful, and—gulp!—fun. The rest of the book then builds on your C skills, turning you from C newbie to coding ninja master in no time.

The activities are NOT optional.

The exercises and activities are not add-ons; they're part of the core content of the book. Some of them are to help with memory, some are for understanding, and some will help you apply what you've learned. **Don't skip the exercises.**

The redundancy is intentional and important.

One distinct difference in a Head First book is that we want you to *really* get it. And we want you to finish the book remembering what you've learned. Most reference books don't have retention and recall as a goal, but this book is about *learning*, so you'll see some of the same concepts come up more than once.

The examples are as lean as possible.

Our readers tell us that it's frustrating to wade through 200 lines of an example looking for the two lines they need to understand. Most examples in this book are shown within the smallest possible context, so that the part you're trying to learn is clear and simple. Don't expect all of the examples to be robust, or even complete—they are written specifically for learning, and aren't always fully functional.

The Brain Power exercises don't have answers.

For some of them, there is no right answer, and for others, part of the learning experience of the Brain Power activities is for you to decide if and when your answers are right. In some of the Brain Power exercises, you will find hints to point you in the right direction.

The technical review team

Dave Kitabjian





Technical reviewers:

Dave Kitabjian has two degrees in electrical and computer engineering and about 20 years of experience consulting, integrating, architecting, and building information system solutions for clients from Fortune 500 firms to high-tech startups. Outside of work, Dave likes to play guitar and piano and spend time with his wife and three kids.

Vince Milner has been developing in C (and many other languages) on a wide variety of platforms for over 20 years. When not studying for his master's degree in mathematics, he can be found being beaten at board games by six-year-olds and failing to move house.

Acknowledgments

Our editor:

Many thanks to **Brian Sawyer** for asking us to write this book in the first place. Brian believed in us every step of the way, gave us the freedom to try out new ideas, and didn't panic too much when deadlines loomed.





The O'Reilly team:

A big thank you goes to the following people who helped us out along the way: **Karen Shaner** for her expert image-hunting skills and for generally keeping the wheels oiled; **Laurie Petrycki** for keeping us well fed and well motivated while in Boston; **Brian Jepson** for introducing us to the wonderful world of the Arduino; and the **early release team** for making early versions of the book available for download. Finally, thanks go to **Rachel Monaghan** and the production team for expertly steering the book through the production process and for working so hard behind the scenes. You guys are awesome.

Family, friends, and colleagues:

We've made a lot of friends on our Head First journey. A special thanks goes to **Lou Barr**, **Brett McLaughlin**, and **Sanders Kleinfeld** for teaching us so much.

David: My thanks to **Andy Parker**, **Joe Broughton**, **Carl Jacques**, and **Simon Jones** and the many other friends who have heard so little from me whilst I was busy scribbling away.

Dawn: Work on this book would have been a lot harder without my amazing support network of family and friends. Special thanks go to **Mum and Dad**, **Carl**, **Steve**, **Gill**, **Jacqui**, **Joyce**, and **Paul**. I've truly appreciated all your support and encouragement.

The without-whom list:

Our technical review team did a truly excellent job of keeping us straight and making sure what we covered was spot on. We're also incredibly grateful to all the people who gave us feedback on early releases of the book. We think the book's much, much better as a result.

Finally, our thanks to **Kathy Sierra** and **Bert Bates** for creating this extraordinary series of books.

Safari® Books Online




Safari Books Online (www.safaribooksonline.com) is an ondemand digital library that delivers expert content in both book and video form from the world's leading authors in

technology and business. Technology professionals, software developers, web designers, and business and creative professionals use Safari Books Online as their primary resource for research, problem solving, learning, and certification training.

Safari Books Online offers a range of product mixes and pricing programs for organizations, government agencies, and individuals. Subscribers have access to thousands of books, training videos, and prepublication manuscripts in one fully searchable database from publishers like O'Reilly Media, Prentice Hall Professional, Addison-Wesley Professional, Microsoft Press, Sams, Que, Peachpit Press, Focal Press, Cisco Press, John Wiley & Sons, Syngress, Morgan Kaufmann, IBM Redbooks, Packt, Adobe Press, FT Press, Apress, Manning, New Riders, McGraw-Hill, Jones & Bartlett, Course Technology, and dozens more. For more information about Safari Books Online, please visit us online.

1 getting started with c

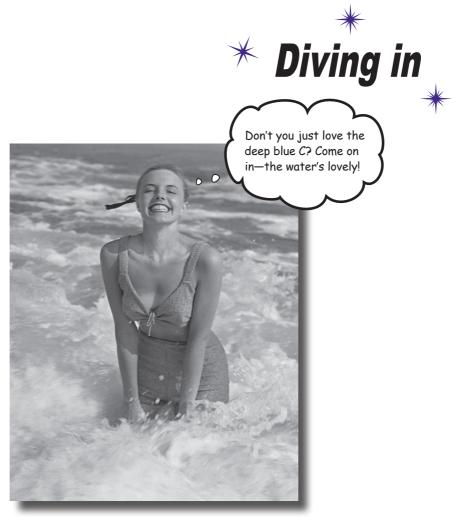

Want to get inside the computer's head?


Need to write **high-performance code** for a new game? Program an **Arduino**? Or use that advanced **third-party library** in your iPhone app? If so, then C's here to help. C works at a **much lower level** than most other languages, so understanding C gives you a much better idea of **what's really going on**. C can even help you better understand other languages as well. So dive in and grab your compiler, and you'll soon get started in no time.

C is a language for small, fast programs

The C language is designed to create small, fast programs. It's lower-level than most other languages; that means *it creates code that's a lot closer to what machines really understand.*


The way C works

Computers really only understand one language: machine code, a binary stream of 1s and 0s. You convert your C code into machine code with the aid of a **compiler**.

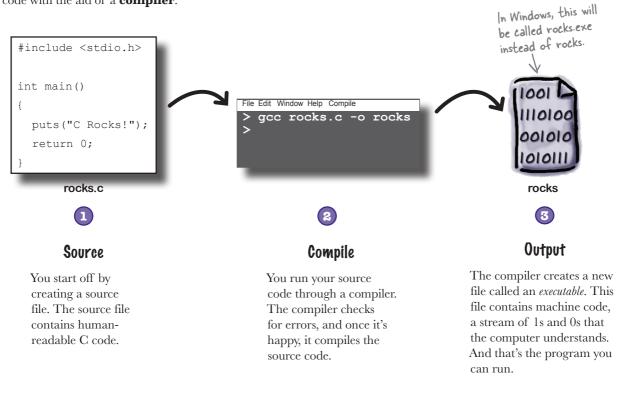

C is used where speed, space, and portability are important. Most operating systems are written in C. Most other computer languages are also written in C. And most game software is written in C.

There are three C standards that you may stumble across. ANSI C is from the late 1980s and is used for the oldest code. A lot of things were fixed up in the C99 standard from 1999. And some cool new language features were added in the current standard, C11, released in 2011. The differences between the different versions aren't huge, and we'll point them out along the way.

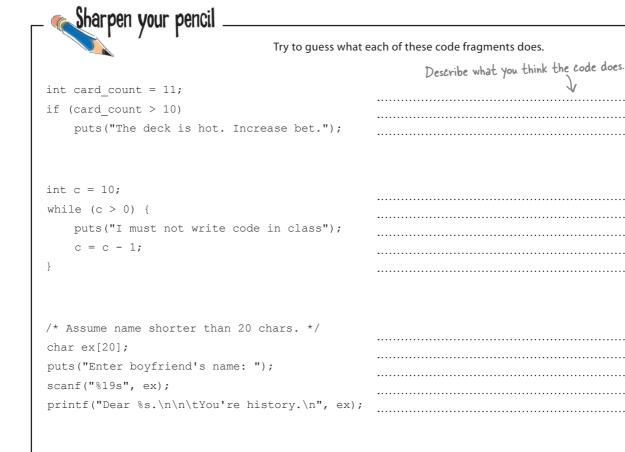

char suit = 'H';
switch(suit) {
case 'C':

break;
case 'D':

break;
case 'H':

break;

default:

puts("Clubs");

puts("Diamonds");

puts("Hearts");

puts("Spades");

Sharpen your pencil Solution

Don't worry if you don't understand all of this yet. Everything is explained in greater detail later in the book.

```
int card_count = 11;  An integer is a whole number.
                                                     Create an integer variable and set it to 11.
if (card count > 10)
                                                     Is the count more than 10?
    puts("The deck is hot. Increase bet.");
                                                     If so, display a message on the command prompt.
This displays a string on the command prompt or terminal.
                The braces define a block statement.
                                                     Create an integer variable and set it to 10.
while (c > 0) {
                                                     As long as the value is positive...
    puts("I must not write code in class")
                                                     ...display a message...
    c = c - 1;
                                                     ...and decrease the count.
                                                     This is the end of the code that should be repeated.
/* Assume name shorter than 20 chars. */
                                                      This is a comment.
char ex[20];
                                                      Create an array of 20 characters.
puts ("Enter boyfriend's name: ");
scanf ("%19s", ex); This means "store everything the
                                                      Display a message on the screen.
                                                      Store what the user enters into the array.
printf("Dear %s.\n\n\tYou're history.\n", ex);
                                                     Display a message including the text entered.
                This will insert this string of
                  characters here in place of the %s.
char suit = 'H';
                   A switch statement checks a single
                                                     Create a character variable; store the letter H.
switch(suit) { variable for different values.
                                                     Look at the value of the variable.
case 'C':
                                                     ls it 'C'?
    puts("Clubs");
                                                     If so, display the word "Clubs.
                                                     Then skip past the other checks.
    break;
                                                     ls it 'D'?
case 'D':
                                                     If so, display the word "Diamonds."
    puts("Diamonds");
                                                     Then skip past the other checks.
    break;
case 'H':
                                                     If so, display the word "Hearts."
    puts("Hearts");
                                                     Then skip past the other checks.
    break:
                                                     Otherwise...
default:
                                                     Display the word "Spades."
    puts("Spades");
                                                     This is the end of the tests.
```

But what does a complete C program look like?

To create a full program, you need to enter your code into a *C source file*. C source files can be created by any text editor, and their filenames usually end with .c.
This is just a convention, but you should follow it.

Let's have a look at a typical C source file.



C programs normally begin with a comment.

The comment describes the purpose of the code in the file, and might include some license or copyright information. There's no absolute need to include a comment here—or anywhere else in the file—but it's good practice and what most C programmers will expect to find.

* Program to calculate the number of cards in the shoe.

* This code is released under the Vegas Public License.

The comment starts with /*. These *s are optional. They're only there to make it look pretty.

The comment ends with */.

* (c)2014, The College Blackjack Team.

Next comes the include section.

#include <stdio.h>

C is a very, very small language and it can do almost nothing without the use of external libraries. You will need to tell the compiler what external code to use by including header files for the relevant libraries. The header you will see more than any other is stdio.h. The stdio library contains code that allows you to read and write data from and to the terminal.

```
int main()
{
   int decks;
   puts("Enter a number of decks");
   scanf("%i", &decks);
   if (decks < 1) {
      puts("That is not a valid number of decks");
      return 1;
   }
   printf("There are %i cards\n", (decks * 52));
   return 0;
}</pre>
```

3

The last thing you find in a source file are the functions.

All C code runs inside functions. The most important function you will find in any C program is called the **main() function**. The main() function is the starting point for all of the code in your program.

So let's look at the main() function in a little more detail.



The main() Function Up Close

The computer will start running your program from the main() function. The name is important: if you don't have a function called main(), your program won't be able to start.

The main () function has a **return type** of int. So what does this mean? Well, when the computer runs your program, it will need to have some way of deciding if the program ran successfully or not. It does this by checking the *return value* of the main () function. If you tell your main () function to return 0, this means that the program was successful. If you tell it to return any other value, this means that there was a problem.

```
Because the function is called "main," the program will start here.
This is the return type. It int main ()
should always be int for the
                                            - If we had any parameters, they'd be mentioned here.
main() function.
                                 int decks;
                                 puts("Enter a number of decks");
                                 scanf("%i", &decks);
       The body of the
                                 if (decks < 1) {
       function is always
                                     puts ("That is not a valid number of decks");
       surrounded by braces.
                                      return 1;
                                 printf("There are %i cards\n", (decks * 52));
                                 return 0;
```

The function name comes after the return type. That's followed by the function parameters if there are any. Finally, we have the *function body*. The function body **must** be surrounded by *braces*.



Geek Bits

The printf() function is used to display **formatted output**. It replaces format characters with the values of variables, like this:

The first parameter will be inserted here as a string. First parameter printf("%s says the count is %i", "Ben", 21);

The second parameter will be inserted here as an integer. Second parameter

You can include as many parameters as you like when you call the printf() function, but make sure you have a matching % format character for each one.

If you want to check the exit status of a program, type:

echo %ErrorLevel%

in Windows, or:

echo \$?

in Linux or on the Mac.



Code Magnets

The College Blackjack Team was working on some code on the dorm fridge, but someone mixed up the magnets! Can you reassemble the code from the magnets?

```
* Program to evaluate face values.
                      * Released under the Vegas Public License.
                      * (c)2014 The College Blackjack Team.
                     .....main()
                        char card_name[3];
                        puts("Enter the card name: ");
     Enter two characters >> scanf("%2s", card_name);
     for the card name.
                        int val = 0;
                        if (card_name[0] == 'K') {
                            val = 10;
                        } else if (card_name[0] == 'Q') {
                          ••••••
                        } else if (card_name[0] == _____) {
                            val = 10;
                        return
<stdlib.h>
                                                                     else
     val = 11
                                                                            #include
                        } else {
                                                 This converts the
                            val = atoi (card_name); text into a number.
                                                                             val = 10
                        printf("The card value is: %i\n", val);
                                                                        <stdio.h>
#include
                       ....0;
                                                                   you are here ▶
```



Code Magnets Solution

The College Blackjack Team was working on some code on the dorm fridge, but someone mixed up the magnets! You were to reassemble the code from the magnets.

```
* Program to evaluate face values.
* Released under the Vegas Public License.
 (c) 2014 The College Blackjack Team.
#include
           <stdio.h>
#include
           <stdlib.h>
int
         main()
  char card_name[3];
  puts("Enter the card name: ");
  scanf("%2s", card name);
  int val = 0;
  if (card name[0] == 'K') {
      val = 10;
   } else if (card name[0] == 'Q') {
      val = 10
   } else if (card name[0] ==
       val = 10;
     else
                  (card name[0]
     val = 11
   } else {
      val = atoi(card_name);
  printf("The card value is: %i\n", val);
   return
               0;
```

there are no Questions

What does card name [0] mean?

A: It's the first character that the user typed. So if he types 10, card_name[0] would be 1.

Do you always write comments using /* and */?

A: If your compiler supports the C99 standard, then you can begin a comment with //. The compiler treats the rest of that line as a comment.

How do I know which standard my compiler supports?

A: Check the documentation for your compiler. gcc supports all three standards: ANSI C, C99, and C11.

But how do you run the program?

C is a *compiled language*. That means the computer will not interpret the code directly. Instead, you will need to convert—or *compile*—the human-readable source code into machine-readable *machine code*.

To compile the code, you need a program called a **compiler**. One of the most popular C compilers is the *GNU Compiler Collection* or **gcc**. gcc is available on a lot of operating systems, and it can compile lots of languages other than C. Best of all, it's completely free.

Here's how you can compile and run the program using gcc.

Save the code from the Code Magnets exercise on the — opposite page in a file called cards.c.



Compile with gcc cards.c -o cards at a command prompt or terminal.



cards.c cards

This will be cards.exe

if you're on Windows.

Run by typing cards on Windows, or ./cards on Mac and Linux machines.







Geek Bits

You can compile and run your code on most machines using this trick:

This command will run the new program only if it compiles successfully. If there's a problem with the compile, it will skip running the program and simply display the errors on the screen.




You should create the cards.c file and compile it now. We'll be working on it more and more as the chapter progresses.

test drive



Let's see if the program compiles and runs. Open up a command prompt or terminal on your machine and try it out.

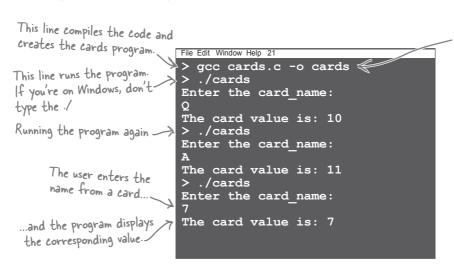

Remember: you can combine the compile and run steps together (turn back a page to see how).

The program works!

Congratulations! You have compiled and run a C program. The gcc compiler took the human-readable source code from *cards.c* and converted it into computer-readable *machine code* in the cards program. If you are using a Mac or Linux machine, the compiler will have created the machine code in a file called *cards*. But on Windows, all programs need to have a *.exe* extension, so the file will be called *cards.exe*.



Why do I have to prefix the program with . / when I run it on Linux and the Mac?

A: On Unix-style operating systems, programs are run only if you specify the directory where they live or if their directory is listed in the PATH environment variable.

Wait, I don't get it. When we ask the user what the name of the card is, we're using an characters???? Why? Can't we use

array of characters. An array of a string or something???



The C language doesn't support strings out < But there are of the box.

C is more low-level than most other languages, so instead of strings, it normally uses something similar: an array of single characters. If you've programmed in other languages, you've probably met an array before. An array is just a list of things given a single name. So card name is just a variable name you use to refer to the list of characters entered at the command prompt. You defined card name to be a two-character array, so you can refer to the first and second character as char name[0] and char name[1]. To see how this works, let's take a deeper dive into the computer's memory and see how C handles text...

a number of C extension libraries that do give you strings.



Strings Way Up Close


Strings are just character arrays. When C sees a string like this:

s = "Shatner"

it reads it like it was just an array of separate characters:

This is how you define an array in C.

Each of the characters in the string is just an element in an array, which is why you can refer to the individual characters in the string by using an index, like s[0] and s[1].



Don't fall off the end of the string


But what happens when C wants to read the contents of the string? Say it wants to print it out. Now, in a lot of languages, the computer keeps pretty close track of the size of an array, but C is more low-level than most languages and can't always work out exactly *how long* an array is. If C is going to display a string on the screen, it needs to know when it gets to the end of the character array. And it does this by adding a **sentinel character**.

The sentinel character is an additional character at the end of the string that has the value \0. Whenever the computer needs to read the contents of the string, it goes through the elements of the character array one at a time, until it reaches \0. That means that when the computer sees this:



s = "Shatner"

it actually stores it in memory like this:



That's why in our code we had to define the card_name variable like this:

char card_name[3];

The card_name string is only ever going to record one or two characters, but because strings end in a *sentinel character* we have to allow for an extra character in the array.

Dumb Questions

Why are the characters numbered from 0? Why not 1?

A: The index is an offset: it's a measure of how far the character is from the first character.

Q: Why?

A: The computer will store the characters in consecutive bytes of memory. It can use the index to calculate the location of the character. If it knows that c[0] is at memory location 1,000,000, then it can quickly calculate that c[96] is at 1.000,000 + 96.

Why does it need a sentinel character? Doesn't it know how long the string is?

A: Usually, it doesn't. C is not very good at keeping track of how long arrays are, and a string is just an array.

It doesn't know how long arrays are???

A: No. Sometimes the compiler can work out the length of an array by analyzing the code, but usually C relies on you to keep track of your arrays.

Or Does it matter if I use single quotes or double quotes?

Yes. Single quotes are used for individual characters, but double quotes are always used for strings.

So should I define my strings using quotes (") or as explicit arrays of characters?

A: Usually you will define strings using quotes. They are called **string literals**, and they are easier to type.

Are there any differences between string literals and character arrays?

A: Only one: string literals are constant.

What does that mean?

A: It means that you can't change the individual characters once they are created.

Q: What will happen if I try?

A: It depends on the compiler, but gcc will usually display a bus error.

A bus error? What the heck's a bus error?

A: C will store string literals in memory in a different way. A bus error just means that your program can't update that piece of memory.



Painless Operations

Not all equals signs are equal.

In C, the equals sign (=) is used for **assignment**. But a double equals sign (==) is used for **testing equality**.

Test if teeth has the value 4.

If you want to increase or decrease a variable, then you can save space with the += and -= assignments.

Finally, if you want to increase or decrease a variable by 1, use ++ and --.


Two types of command

So far, every command you've seen has fallen into one of the following two categories.

Po something

Most of the commands in C are statements. Simple statements are *actions*; they *do* things and they *tell us* things. You've met statements that define variables, read input from the keyboard, or display data to the screen.

Sometimes you group statements together to create *block statements*. Block statements are groups of commands surrounded by braces.

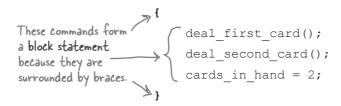

Po something only if something is true

Control statements such as if check a condition before running the code:

```
if (value_of_hand <= 16)  This is the condition.

hit();  Run this statement if the condition is true.

else

stand();  Run this statement if the condition is false.
```

if statements typically need to do more than one thing when a condition is true, so they are often used with block statements:

```
if (dealer_card == 6) {
    double_down();
    hit();
    BOTH of these commands will
    run if the condition is true.
    The commands are grouped
    inside a single block statement.
```



Do you need braces?

Block statements allow you to treat a whole set of statements as if they were a single statement. In C, the if condition works like this:

```
if (countdown == 0)
  do_this_thing();
```

The if condition runs a **single statement**. So what if you want to run several statements in an if? If you wrap a list of statements in braces, C will treat them as though they were just one statement:

```
if (x == 2) {
  call_whitehouse();
  sell_oil();
  x = 0;
}
```

C coders like to keep their code short and snappy, so most will omit braces on if conditions and while loops. So instead of writing:

```
if (x == 2) {
    puts("Do something");
}
most C programmers write:
if (x == 2)
    puts("Do something");
```

Here's the code so far

```
* Program to evaluate face values.
 * Released under the Vegas Public License.
 * (c) 2014 The College Blackjack Team.
#include <stdio.h>
#include <stdlib.h>
int main()
    char card_name[3];
    puts("Enter the card name: ");
    scanf("%2s", card name);
    int val = 0;
    if (card name[0] == 'K') {
        val = 10;
    } else if (card_name[0] == 'Q') {
        val = 10;
    } else if (card name[0] == 'J') {
        val = 10;
    } else if (card_name[0] == 'A') {
        val = 11;
    } else {
        val = atoi(card_name);
    printf("The card value is: %i\n", val);
    return 0;
```

I've had a thought.
Could this check if
a card value is in a
particular range? That
might be handy...

0

Hey, how's it going? You look to me like a smart guy. And I know, 'cause I'm a smart guy too! Listen, I'm onto a sure thing here, and I'm a nice guy, so I'm going to let you in on it. See, I'm an expert in card counting. The Capo di tutti capi. What's card counting, you say? Well, to me, it's a career!

Seriously, card counting is a way of improving the odds when you play blackjack. In blackjack, if there are plenty of high-value cards left in the shoe, then the odds are slanted in favor of the player. That's you!

Card counting helps you keep track of the number of high-value cards left. Say you start with a count of 0.

Then the dealer leads with a Queen—that's a high card. That's one less available in the deck, so you reduce the count by one:

It's a queen → count - 1

But if it's a low card, like a 4, the count goes up by one:

It's a four \rightarrow count + 1

High cards are 10s and the face cards (Jack, Queen, King). Low cards are 3s, 4s, 5s, and 6s.

You keep doing this for every low card and every high card until the count gets real high, then you lay on cash


in your next bet and ba-dabing! Soon you'll have more money than my third wife!

If you'd like to learn more, then enroll today in my Blackjack Correspondence School. Learn more about card counting as well as:

- * How to use the Kelly Criterion to maximize the value of your bet
- * How to avoid getting whacked by a pit boss
- * How to get cannoli stains off a silk suit
- * Things to wear with plaid For more information, contact Cousin Vinny c/o the Blackjack Correspondence School.

Card counting? In C?

Card counting is a way to increase your chances of winning at blackjack. By keeping a running count as the cards are dealt, a player can work out the best time to place large bets and the best time to place small bets. Even though it's a powerful technique, it's really quite simple.

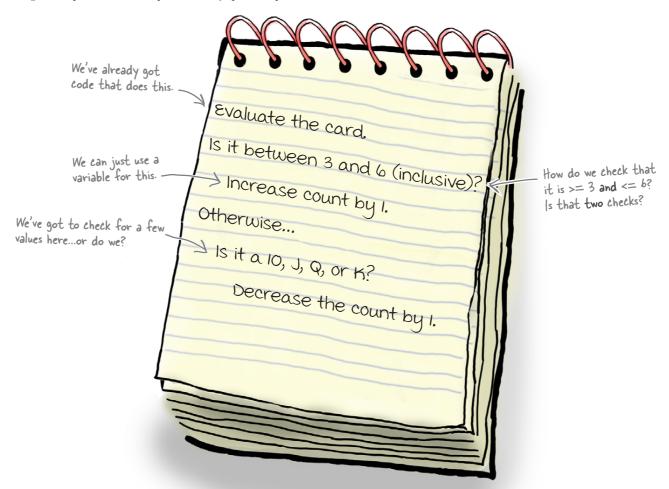

How difficult would this be to write in C? You've looked at how to make a single test, but the card-counting algorithm needs to check multiple conditions: you need to check that a number is >= 3 as well as checking that it's <= 6.

You need a set of operations that will allow you to combine conditions together.

There's more to booleans than equals...

So far, you've looked at if statements that check if a single condition is true, but what if you want to check several conditions? Or check if a single condition is *not* true?

&& checks if two conditions are true

The and operator (&&) evaluates to true, only if **both** conditions given to it are true.

The *and* operator is efficient: if the first condition is false, then the computer won't bother evaluating the second condition. It knows that if the first condition is false, then the whole condition must be false.

Il checks if one of two conditions is true

The or operator (| |) evaluates to true, if **either** condition given to it is true.

If the first condition is true, the computer won't bother evaluating the second condition. It knows that if the first condition is true, the whole condition must be true.

! flips the value of a condition

! is the not operator. It reverses the value of a condition.



Geek Bits

In C, boolean values are represented by

numbers. To C, the number 0 is the value for false. But what's the value for true? Anything that is not equal to 0 is treated as true. So there is nothing wrong in writing C code like this:

```
int people_moshing = 34;
if (people_moshing)
    take_off_glasses();
```

In fact, C programs often use this as a shorthand way of checking if something is not 0.



You are going to modify the program so that it can be used for card counting. It will need to display one message if the value of the card is from 3 to 6. It will need to display a different message if the card is a 10, Jack, Queen, or King.

```
int main()
{
   char card name[3];
   puts("Enter the card_name: ");
   scanf("%2s", card name);
   int val = 0;
   if (card name[0] == 'K') {
       val = 10;
   } else if (card name[0] == 'Q') {
       val = 10;
   } else if (card name[0] == 'J') {
       val = 10;
   } else if (card_name[0] == 'A') {
      val = 11;
   } else {
      val = atoi(card name);
   /* Check if the value is 3 to 6 */
   if ______
       puts("Count has gone up");
   /* Otherwise check if the card was 10, J, Q, or K ^*/
   else if
      puts("Count has gone down");
   return 0;
```

The Polite Guide to Standards



The ANSI C standard has no value for true and false. C programs treat the value 0 as false, and any other value as true. The C99 standard does allow you to use the words *true* and *false* in your programs—but the compiler treats them as the values 1 and 0 anyway.



You were to modify the program so that it can be used for card counting. It needed to display one message if the value of the card is from 3 to 6. It needed to display a different message if the card is a 10, Jack, Queen, or King.

```
int main()
                    char card name[3];
                    puts("Enter the card name: ");
                    scanf("%2s", card name);
                    int val = 0;
                    if (card name[0] == 'K') {
                         val = 10;
                     } else if (card name[0] == 'Q') {
                         val = 10;
                     } else if (card name[0] == 'J') {
                         val = 10;
                     } else if (card name[0] == 'A') {
                         val = 11;
                     } else {
                         val = atoi(card name);
 There are a few
                   /* Check if the value is 3 to 6 */
if ((val > 2) { (val < 7))
 ways of writing _
                         puts("Count has gone up");
                    ^{\prime \star} Otherwise check if the card was 10, J, Q, or K ^{\star}/
Did you spot that you else if (val == 10)

just needed a single

puts ("Count has area.")
condition for this?
                    return 0;
```

there are no **Dumb Questions**

 \mathbb{Q} : Why not just | and &?

A: You can use & and | if you want.
The & and | operators will always
evaluate both conditions, but & & and | |
can often skip the second condition.

So why do the & and | operators exist?

A: Because they do more than simply evaluate logical conditions. They perform bitwise operations on the individual bits of a number.

Huh? What do you mean?

Well, 6 & 4 is equal to 4, because if you checked which binary digits are common to 6 (110 in binary) and 4 (100 in binary, you get 4 (100).



Let's see what happens when you compile and run the program now:

```
This line compiles
                   File Edit Window Help FiveOfSpades
and runs the code.
                      gcc cards.c -o cards && ./cards
                    Enter the card name:
                    Count has gone down
                    > ./cards
  We run it a
                    Enter the card_name:
  few times to
  check that the
                    > ./cards
  different value
                    Enter the card name:
  ranges work.
                    Count has gone up
```

The code works. By combining multiple conditions with a boolean operator, you check for a range of values rather than a single value. You now have the basic structure in place for a card counter.





Head First: May I begin by thanking you, gcc, for finding time in your very busy schedule to speak to us.

gcc: That's not a problem, my friend. A pleasure to help.

Head First: gcc, you can speak many languages, is that true?

gcc: I am fluent in over six million forms of communication...

Head First: Really?

gcc: Just teasing. But I do speak many languages. C, obviously, but also C++ and Objective-C. I can get by in Pascal, Fortran, PL/I, and so forth. Oh, and I have a smattering of Go...

Head First: And on the hardware side, you can produce machine code for many, many platforms?

gcc: Virtually any processor. Generally, when a hardware engineer creates a new type of processor, one of the first things she wants to do is get some form of me running on it.

Head First: How have you achieved such incredible flexibility?

gcc: My secret, I suppose, is that there are two sides to my personality. I have a frontend, a part of me that understands some type of source code.

Head First: Written in a language such as C?

gcc: Exactly. My frontend can convert that language into an intermediate code. All of my language frontends produce the same sort of code.

Head First: You say there are two sides to your personality?

gcc: I also have a backend: a system for converting that intermediate code into machine code that is understandable on many platforms. Add to that my knowledge of the particular executable file formats for just about every operating system you've ever heard of...

Head First: And yet, you are often described as a mere translator. Do you think that's fair? Surely that's not all you are.

gcc: Well, of course I do a little more than simple translation. For example, I can often spot errors in code.

Head First: Such as?

gcc: Well, I can check obvious things such as misspelled variable names. But I also look for subtler things, such as the redefinition of variables. Or I can warn the programmer if he chooses to name variables after existing functions and so on.

Head First: So you check code quality as well, then?

gcc: Oh, yes. And not just quality, but also performance. If I discover a section of code inside a loop that could work equally well outside a loop, I can very quietly move it.

Head First: You do rather a lot!

gcc: I like to think I do. But in a quiet way.

Head First: gcc, thank you.

BE the Compiler

Each of the C files on this page
represents a complete source file. Your
job is to play compiler and determine

whether each of these files will compile, and if not, why not. For extra honus points, say what you think the output of each compiled

file will be when run, and whether you think the code is working as intended.

A

```
#include <stdio.h>
int main()
    int card = 1;
    if (card > 1)
        card = card - 1;
        if (card < 7)
            puts("Small card");
    else {
     puts("Ace!");
    return 0;
}
         В
#include <stdio.h>
int main()
    int card = 1;
    if (card > 1) {
        card = card - 1;
        if (card < 7)
           puts("Small card");
    else
     puts("Ace!");
    return 0;
```

```
C
```

```
#include <stdio.h>
int main()
    int card = 1;
    if (card > 1) {
       card = card - 1;
        if (card < 7)
            puts("Small card");
    } else
     puts("Ace!");
    return 0;
         D
#include <stdio.h>
int main()
    int card = 1;
    if (card > 1) {
       card = card - 1;
       if (card < 7)
            puts("Small card");
    else
     puts("Ace!");
    return 0;
```

23

BE the Compiler Solution

Each of the C files on this page represents a complete source file. Your job is to play compiler and determine

> whether each of these files will compile, and if not, why not. For extra honus points, say what you think the output of each compiled

file will be when run, and whether you think the code is working as intended.

The code compiles. The

The code compiles. The

```
A
```

В

```
#include <stdio.h> program displays nothing
int main()
{
    int card = 1;
    if (card > 1) {
        card = card - 1;
        if (card < 7)
            puts("Small card");
    else
        puts("Ace!");
    }
    return 0;
}</pre>
```

С

```
#include <stdio.h>
int main()
{
    int card = 1;
    if (card > 1) {
        card = card - 1;
        if (card < 7)
            puts("Small card");
    } else
    puts("Ace!");

    return 0; The code compiles. The
    program displays "Ace!"
        and is properly written.</pre>
```

D

```
#include <stdio.h>
int main()
{
    int card = 1;
    if (card > 1) {
        card = card - 1;
        if (card < 7)
            puts("Small card");
    else
        puts("Ace!");
    return 0;
}</pre>
```

The code won't compile because the braces are not matched.

What's the code like now?

```
int main()
    char card name[3];
    puts("Enter the card name: ");
    scanf("%2s", card name);
    int val = 0;
    if (card name[0] == 'K') {
        val = 10;
    } else if (card name[0] == 'Q') {
        val = 10;
    } else if (card name[0] == 'J') {
        val = 10;
    } else if (card name[0] == 'A') {
        val = 11;
    } else {
        val = atoi(card name);
    /* Check if the value is 3 to 6 */
    if ((val > 2) && (val < 7))
        puts("Count has gone up");
    /\!\!^* Otherwise check if the card was 10, J, Q, or K ^*/\!\!^-
    else if (val == 10)
        puts("Count has gone down");
    return 0;
```

Hmmm...is there something we can do with that sequence of if statements? They're all checking the same value, card_name[0], and most of them are setting the val variable to 10. I wonder if there's a more efficient way of saying that in C.

C programs often need to check the same value several times and then perform very similar pieces of code for each case.

Now, you can just use a sequence of if statements, and that will probably be just fine. But C gives you an alternative way of writing this kind of logic.

C can perform logical tests with the switch statement.

www.it-ebooks.info

Pulling the ol'switcheroo

Sometimes when you're writing conditional logic, you need to check the value of the same variable over and over again. To prevent you from having to write lots and lots of if statements, the C language gives you another option: the **switch** statement.

The switch statement is kind of like an if statement, except it can test for multiple values of a *single variable*:

```
switch (train) {

case 37:

winnings and then skip to the end.

winnings = winnings + 50;

break;

case 65:

puts ("Jackpot!");

winnings = winnings + 80;

case 12:

winnings = winnings + 20;

break;

default:

winnings = 0;

For any other value of train, set the winnings

}
```


When the computer hits a switch statement, it checks the value it was given, and then looks for a matching case. When it finds one, it runs *all* of the code that follows it until it reaches a break statement. The computer keeps going until it is told to break out of the switch statement.



Missing breaks can make your code buggy.

Most C programs have a break at the end of each case section to make the code easier to

understand, even at the cost of some efficiency.



Let's look at that section of your cards program again:

```
int val = 0;
if (card_name[0] == 'K') {
   val = 10;
} else if (card_name[0] == 'Q') {
   val = 10;
} else if (card_name[0] == 'J') {
   val = 10;
} else if (card_name[0] == 'A') {
   val = 11;
} else {
   val = atoi(card name);
```

Do you think you can rewrite this code using a switch statement? Write your answer below:

 ······································

Sharpen your pencil Solution

You were to rewrite the code using a switch statement.

```
int val = 0;
if (card_name[0] == 'K') {
    val = 10;
} else if (card_name[0] == 'Q') {
    val = 10;
} else if (card_name[0] == 'J') {
    val = 10;
} else if (card_name[0] == 'A') {
    val = 11;
} else {
    val = atoi(card_name);
}
```

```
int val = 0;
switch(card_name[O]) {
    case 'K':
    case 'Q':
    case 'J':
    val = 10;
    break;
    case 'A':
    val = 11;
    break;
    default:
    val = atoi(card_name);
}
```

BULLET POINTS

- switch statements can replace a sequence of if statements.
- switch statements check a single value.
- The computer will start to run the code at the first matching case statement.
- It will continue to run until it reaches a break or gets to the end of the switch statement.
- Check that you've included breaks in the right places; otherwise, your switches will be buggy.

Dumb Questions

Why would I use a switch statement instead of an if?

A: If you are performing multiple checks on the same variable, you might want to use a switch statement.

What are the advantages of using a switch statement?

There are several. First: clarity. It is clear that an entire block of code is processing a single variable. That's not so obvious if you just have a sequence of if statements. Secondly, you can use fall-through logic to reuse sections of code for different cases.

Does the switch statement have to check a variable? Can't it check a value?

A: Yes, it can. The switch statement will simply check that two values are equal.

Can I check strings in a switch statement?

A: No, you can't use a switch statement to check a string of characters or any kind of array. The switch statement will only check a single value.

Sometimes once is not enough...

You've learned a lot about the C language, but there are still some important things to learn. You've seen how to write programs for many different situations, but there is one fundamental thing that we haven't really looked at yet. What if you want your program to do something again and again and again?

Using while loops in C

Loops are a special type of control statement. A control statement decides *if* a section of code will be run, but a loop statement decides *how many times* a piece of code will be run.

The most basic kind of loop in C is the while loop. A while loop runs code *over and over and over* as long as some condition remains true.



Do you do while?

There's another form of the while loop that checks the loop condition *after* the loop body is run. That means the loop always executes **at least once**. It's called the do...while loop:

```
do {
   /* Buy lottery ticket */
} while(have_not_won);
```



Loops often follow the same structure...

You can use the while loop anytime you need to repeat a piece of code, but a lot of the time your loops will have the same kind of structure:

- Do something simple before the loop, like set a counter.
- Have a simple test condition on the loop.
- Do something at the end of a loop, like update a counter.

For example, this is a while loop that counts from 1 to 10:

```
int counter = 1; This is the loop startup code.

This is the loop update code that runs at the end of the loop body to update a counter.

This is the loop startup code.

This is the loop condition.

This is the loop condition.

Printf("%i green bottles, hanging on a wall\n", counter);

Remember: counter++ means "increase the counter variable by one."
```

Loops like this have code that prepares variables for the loop, some sort of condition that is checked each time the loop runs, and finally some sort of code at the end of the loop that updates a counter or something similar.

...and the for loop makes this easy

Because this pattern is so common, the designers of C created the **for** loop to make it a little more concise. Here is that same piece of code written with a for loop:

```
This is the text condition checked before the loop runs each time.

This is the code that will run after each loop.

This initializes the loop variable.

This is the code that will run after each loop.

This initializes the printf ("%i green bottles, hanging on a wall\n", counter);

Because there's only one line in the loop body, you could actually have skipped these braces.
```

for loops are actually used a *lot* in C—as much, if not more than, while loops. Not only do they make the code slightly shorter, but they're also easier for other C programmers to read, because all of the code that controls the loop—the stuff that controls the value of the counter variable—is now contained in the for statement and is taken out of the loop body.

Every for loop needs to have something in the body.

You use break to break out...

You can create loops that check a condition at the beginning or end of the loop body. But what if you want to escape from the loop from somewhere in the middle? You could always restructure your code, but sometimes it's just simpler skip out of the loop immediately using the **break** statement:

```
while(feeling_hungry) {
    eat_cake();
    if (feeling_queasy) {
        /* Break out of the while loop */
        break;
    }
    drink_coffee();
}
```

A break statement will break you straight out of the current loop, skipping whatever follows it in the loop body. breaks can be useful because they're sometimes the simplest and best way to end a loop. But you might want to avoid using too many, because they can also make the code a little harder to read.

...and continue to continue

If you want to skip the rest of the loop body and go back to the start of the loop, then the continue statement is your friend:

```
while(feeling_hungry) {
    if (not_lunch_yet) {
        /* Go back to the loop condition */
        continue; "continue" takes you back
        to the start of the loop.
        eat_cake();
}
```



The break statement is used to break out of loops and also

switch statements.

Make sure that you know what you're breaking out of when you break.

:



breaks don't break if statements.

On January 15, 1990, AT&T's long-distance telephone system crashed, and 60,000 people lost their phone service. The cause? A developer working on the C code used in the exchanges tried to use a break to break out of an if statement. But breaks don't break out of ifs. Instead, the program skipped an entire section of code and introduced a bug that interrupted 70 million phone calls over nine hours.



Writing Functions Up Close

Before you try out your new loop mojo, let's go on a detour and take a quick look at functions.

So far, you've had to create one function in every program you've written, the main () function:

```
This function Int main () Nothing between these parentheses.

The body of the function—
the part that does stuff.

The body of puts ("Too young to die; too beautiful to live");

When you're done, you return a value.

braces.
```

Pretty much all functions in C follow the same format. For example, this is a program with a custom function that gets called by main():

The larger() function is slightly different from main() because it takes *arguments* or *parameters*. An **argument** is just a local variable that gets its value from the code that calls the function. The larger() function takes two arguments—a and b—and then it returns the value of whichever one is larger.

The Polite Guideto Standards

The main () function has an int return type, so you should include a return statement when you get to the end. But if you leave the return statement out, the code will still compile—though you may get a warning from the compiler. A C99 compiler will insert a return statement for you if you forget. Use—std=99 to compile to the C99 standard.

return 0;

Void Functions Up Close



Most functions in C have a return value, but sometimes you might want to create a function that has nothing useful to return. It might just *do* stuff rather than *calculate* stuff. Normally, functions always have to contain a return statement, but not if you give your function the return type **void**:

```
The void return void complain()

type means the function won't 
return anything. 

There's no need for a return 
statement because it's a void function.
```

In C, the keyword void means it doesn't matter. As soon as you tell the C compiler that you don't care about returning a value from the function, you don't need to have a return statement in your function.

there are no Dumb Questions

If I create a void function, does that mean it can't contain a return statement?

A: You can still include a return statement, but the compiler will most likely generate a warning. Also, there's no point to including a return statement in a void function.

Q: Really? Why not?

A: Because if you try to read the value of your void function, the compiler will refuse to compile your code.




Chaining Assignments

Almost everything in C has a return value, and not just function calls. In fact, even things like assignments have

return values. For example, if you look at this statement:

$$x = 4;$$

It assigns the number 4 to a variable. The interesting thing is that the expression "x = 4" itself has the value that was assigned: 4. So why does that matter? Because it means you can do cool tricks, like chaining assignments together:



That line of code will set both x **and** y to the value 4. In fact, you can shorten the code slightly by removing the parentheses:

$$y = x = 4;$$

You'll often see chained assignments in code that needs to set several variables to the same value.

messages mixed



A short C program is listed below. One block of the program is missing. Your challenge is to **match the candidate block of code** (on the left) **with the output** that you'd see if the block were inserted. Not all of the lines of output will be used, and some of the lines of output might be used more than once. Draw lines connecting the candidate blocks of code with their matching command-line output.

```
#include <stdio.h>
int main()
{
    int x = 0;
    int y = 0;
    while (x < 5) {

        printf("%i%i ", x, y);
        x = x + 1;
    }
    return 0;
}</pre>
```

Candidates:

y = x - y;

y = y + x;

Match each candidate with one of the possible outputs.

$$x = x + 1;$$

 $y = y + x;$

Possible output:

2	2	4	6

11 34 59

02 14 26 38

02 14 36 48

00 11 21 32 42

11 21 32 42 53

00 11 23 36 410

02 14 25 36 47



Now that you know how to create while loops, modify the program to keep a running count of the card game. Display the count after each card and end the program if the player types X. Display an error message if the player types a bad card value like 11 or 24.

```
#include <stdio.h>
             #include <stdlib.h>
             int main()
                                           Vou need to stop if she enters X.
                 char card name[3];
                 int count = 0;
                 while (_______) {
                     puts("Enter the card_name: ");
                     scanf("%2s", card name);
                     int val = 0;
                     switch(card name[0]) {
                     case 'K':
                     case '0':
                     case 'J':
                        val = 10;
                        break;
                     case 'A':
                        val = 11;
                        break;
                                 What will you do here?
                     case 'X':
                        .....
                     default:
You need to display an error if
                       val = atoi(card name);
the val is not in the range 1 to -
10. You should also skip the rest
of the loop body and try again.
                         •••••
                     if ((val > 2) && (val < 7)) {
         Add I to count. -> count++;
                    } else if (val == 10) {
    Subtract | from count.
                      -> count--;
                     printf("Current count: %i\n", count);
                 return 0;
             }
```

messages unmixed




A short C program is listed below. One block of the program is missing. Your challenge was to **match the candidate block of code** (on the left) **with the output** that you'd see if the block were inserted. Not all of the lines of output were used. You were to draw lines connecting the candidate blocks of code with their matching command-line output.

```
#include <stdio.h>

int main()
{
    int x = 0;
    int y = 0;
    while (x < 5) {

        printf("%i%i ", x, y);
        x = x + 1;
    }
    return 0;
}</pre>
```

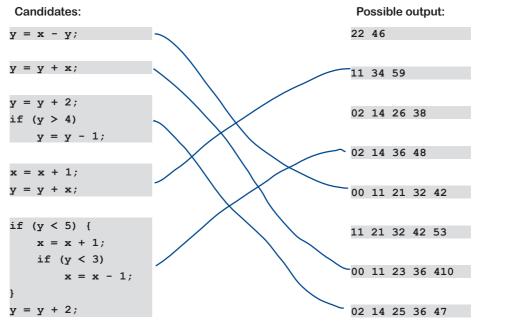



Now that you know how to create while loops, you were to modify the program to keep a running count of the card game. Display the count after each card and end the program if the player types X. Display an error message if the player types a bad card value like 11 or 24.

```
#include <stdio.h>
              #include <stdlib.h>
             int main()
                                           You need to check if the first character was an X.
                  char card name[3];
                  int count = 0;
                  scanf("%2s", card name);
                      int val = 0;
                      switch(card name[0]) {
                      case 'K':
                      case '0':
                      case 'J':
                          val = 10;
                          break;
                      case 'A':
                           val = 11;
                                      break wouldn't break us out of the loop, because we're inside
                           break;
                                      a switch statement. We need a continue to go back and check
                           continue; the loop condition again.
                      case 'X':
                      default:
    This is just one way of
                           val = atoi(card_name);
                         if ((val < 1) || (val > TO)) {

puts("| don't understand that value!");
     writing this condition.
You need another continue here -
because you want to keep looping.
                      if ((val > 2) && (val < 7)) {
                           count++;
                      } else if (val == 10) {
                           count--;
                      printf("Current count: %i\n", count);
                  }
                  return 0;
             }
```



Now that the card-counting program is finished, it's time to take it for a spin. What do you think? Will it work?

Remember: you don't need "/
if you're on Windows.

```
File Edit Window Help GoneLoopy
 This will compile
 and run the
                > gcc card counter.c -o card counter && ./card counter
 Program.
                Enter the card name:
                Current count: 1
                Enter the card name:
                Current count: 0
                Enter the card name:
                Current count: 1
                Enter the card name:
                Current count: 2
                Enter the card name:
We now check
                23
if it looks
                I don't understand that value!
like a correct
                Enter the card name:
card value.
                Current count: 3
                Enter the card_name:
                Current count: 4
                Enter the card name:
The count is
                Current count: 5
                                                               By betting big when
increasing!
                Enter the card name:
                                                               the count was high, I
                                                               made a fortune!
```

The card counting program works!

You've completed your first C program. By using the power of C statements, loops, and conditions, you've created a fully functioning card counter.

Great job!

Disclaimer: Using a computer for card counting is illegal in many states, and those casino guys can get kinda gnarly. So don't do it, OK?

38 Chapter 1

www.it-ebooks.infg



bumb Questions

Why do I need to compile C? Other languages like JavaScript aren't compiled, are they?

A: C is compiled to make the code fast. Even though there are languages that aren't compiled, some of those—like JavaScript and Python—often use some sort of hidden compilation to improve their speed.

ls C++ just another version of C?

A: No. C++ was originally designed as an extension of C, but now it's a little more than that. C++ and Objective-C were both created to use object orientation with C.

What's object orientation? Will we learn it in this book?

A: Object orientation is a technique to deal with complexity. We won't specifically look at it in this book.

C#, etc.

A: C has a very compact syntax and it's influenced many other languages.

What does gcc stand for?

A: The Gnu Compiler Collection.

Why "collection"? Is there more than one?

A: The Gnu Compiler Collection can be used to compile many languages, though C is probably still the language with which it's used most frequently.

Can I create a loop that runs forever?

A: Yes. If the condition on a loop is the value 1, then the loop will run forever.

Is it a good idea to create a loop that runs forever?

A: Sometimes. An infinite loop (a loop that runs forever) is often used in programs like network servers that perform one thing repeatedly until they are stopped. But most coders design loops so that they will stop sometime.



BULLET POINTS

- A while loop runs code as long as its condition is true.
- A do-while loop is similar, but runs the code at least once.
- The for loop is a more compact way of writing certain kinds of loops.
- You can exit a loop at any time with break.
- You can skip to the loop condition at any time with continue.

- The return statement returns a value from a function.
- void functions don't need return statements.
- Most expressions in C have values.
- Assignments have values so you can chain them together (x = y = 0).

39

Your C Toolbox

You've got Chapter 1 under switch statements your belt, and now you've efficiently check added C basics to your toolbox. for multiple values For a complete list of tooltips in the of a variable. book, see Appendix ii. Every Simple statements Program needs a main() Block function. commands. statements You need to are surrounded compile your C by { and } program before (braces). You can use the ¿¿ you run it. operator on the if statements #include includes command line to external code run code if run your program something is for things only if it compiles. like input and true. -o specifies output. the output file You can use EE and | to combine conditions while repeats together. code as long Your source files gcc is the as a condition should have a most popular do-while is true. name ending C compiler. loops run in .c. code at least once. for loops are a count++ count -more compact means add 1 means way of writing to count. subtract 1 loops. from count.

2 memory and pointers



If you really want to kick butt with C, you need to understand how C handles memory.

The C language gives you a lot more *control* over how your program uses the **computer's memory**. In this chapter, you'll strip back the covers and see exactly what happens when you **read and write variables**. You'll learn **how arrays work**, how to avoid some **nasty memory SNAFUs**, and most of all, you'll see how **mastering pointers and memory addressing** is key to becoming a kick-ass C programmer.

C code includes pointers

Pointers are one of the most fundamental things to understand in the C programming language. So what's a pointer? A **pointer** is just the address of a piece of data in memory.

Pointers are used in C for a couple of reasons.

To best understand pointers, go slowly.



Instead of passing around a whole copy of the data, you can just pass a pointer.

I've got the answer you need; it's right here in the Encyclopedia Britannica.





Or you could just look at page 241.

> This is a pointer: the location of the information

2

You might want two pieces of code to work on the same piece of data rather than a separate copy.

You were supposed to sign the birthday card we left in the lunch room.



Pointers help you do both these things: avoid copies and share data.

But if pointers are just addresses, why do some people find them

confusing? Because they're a **form of indirection**. If you're not

careful, you can quickly get lost chasing pointers through memory.

The trick to learning how to use C pointers is to go slowly.



But I prefer this one—it's got kittens!



Don't try to rush this chapter.

Pointers are a simple idea, but you need

to take your time and understand everything. Take frequent breaks, drink plenty of water, and if you really get stuck, take a nice long bath.

Pigging into memory

To understand what pointers are, you'll need to dig into the memory of the computer.

Every time you declare a variable, the computer creates space for it somewhere in memory. If you declare a variable *inside* a function like main(), the computer will store it in a section of memory called the **stack**. If a variable is declared *outside any function*, it will be stored in the **globals** section of memory.

```
int y = 1; Variable y will live in the globals section.

Memory address 1,000,000.

Value 1.

int main()

{

int x = 4; Variable x will live in the stack.

return 0; Value 4.
```

The computer might allocate, say, memory location 4,100,000 in the stack for the x variable. If you assign the number 4 to the variable, the computer will store 4 at location 4,100,000.

If you want to find out the memory address of the variable, you can use the ${\bf \&}$ operator:

```
printf ("x is stored at %p\n", &x);


This is what the code will print.

It is stored at 0x3E8FA0

This is 4,100,000 in hex (base 16) format.

This is 4,00,000 in hex (base 16) format.
```

The address of the variable tells you where to find the variable in memory. That's why an address is also called a *pointer*, because it *points* to the variable in memory.

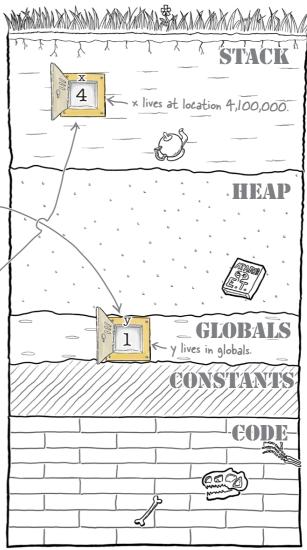

A variable declared inside a function is usually stored in the stack.


A variable declared outside a function is stored in globals.

Set sail with pointers

Imagine you're writing a game in which players have to navigate their way around the...



The game will need to keep control of lots of things, like scores and lives and the current location of the players. You won't want to write the game as one large piece of code; instead, you'll create lots of smaller functions that will each do something useful in the game:

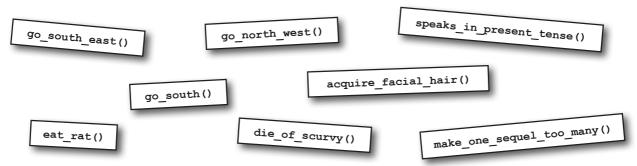

What does any of this have to do with pointers? Let's begin coding without worrying about pointers at all. You'll just use variables as you always have. A major part of the game is going to be navigating your ship around the Bermuda Rectangle, so let's dive deeper into what the code will need to do in one of the navigation functions.

go_south_east()

The longitude will increase.

Set sail sou'east, Cap'n

The game will track the location of players using *latitudes* and *longitudes*. The latitude is how far north or south the player is, and the longitude is her position east or west. If a player wants to travel southeast, that means her latitude will go *down*, and her longitude will go *up*:

So you could write a go_south_east() function that takes arguments for the latitude and longitude, which it will then increase and decrease:

```
Pass in the latitude
#include <stdio.h>
                        and longitude.
                                                          The
                                                          latitude
void go south east(int lat, int lon)
                                                          will
                                                          decrease.
  lat = lat - 1; Decrease the
  lon = lon + 1;
       Increase the longitude.
int main()
  int latitude = 32;
  int longitude = -64;
  go south east(latitude, longitude);
  printf("Avast! Now at: [%i, %i]\n", latitude, longitude);
  return 0;
}
```

The program starts a ship at location [32, -64], so if it heads southeast, the ship's new position will be [31, -63]. At least it will be *if the code works*...



Look at the code carefully. Do you think it will work? Why? Why not?

test drive



The code should move the ship southeast from [32, -64] to the new location at [31, -63]. But if you compile and run the program, this happens:



We be Arr! We be becalmed, writin' a bad cap'n! Amazon review!


The ship's location stays *exactly* the same as before.

C sends arguments as values

The code broke because of the way that C calls functions.

Initially, the main () function has a local variable called longitude that had value 32.


vlongitude

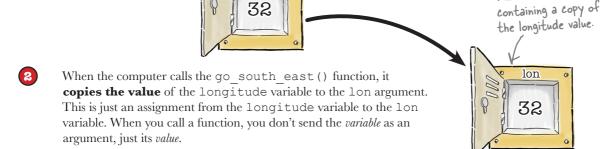

3 When the go south east () function changes the value of lon, the function is just changing its local copy. That means when the computer returns to the main () function, the longitude variable still has its original value of 32.

But if that's how C calls functions, how can you ever write a function that updates a variable?

It's easy if you use pointers...



The original variable keeps its original value.


This is a new variable




46 Chapter 2


Try passing a pointer to the variable

Instead of passing the *value* of the latitude and longitude variables, what happens if you pass their *addresses*? If the longitude variable lives in the stack memory at location 4,100,000, what happens if you pass the location number 4,100,000 as a parameter to the go south east () function?

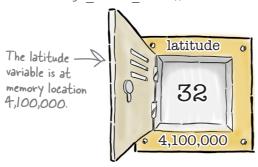

If the go_south_east() function is told that the latitude value lives at location 4,100,000, then it will not only be able to find the current latitude value, but it will also be able to change the contents of the original latitude variable. All the function needs to do is read and update the contents of memory location 4,100,000.





Because the go_south_east() function is updating the original latitude variable, the computer will be able to print out the updated location when it returns to the main() function.

Pointers make it easier to share memory

This is one of the main reasons for using pointers—to let functions *share* memory. The data created by one function can be modified by another function, so long as it knows where to find it in memory.

Now that you know the theory of using pointers to fix the go_south_east() function, it's time to look at the details of how you do it.



I printed the location of the variable on my machine and it wasn't 4,100,000. Did I do something wrong?

A: You did nothing wrong. The memory location your program uses for the variables will be different from machine to machine.

Why are local variables stored in the stack and globals stored somewhere else?

A: Local and global variables are used differently. You will only ever get one copy of a global variable, but if you write a function that calls itself, you might get very many instances of the same local variable.

What are the other areas of the memory used for?

A: You'll see what the other areas are for as you go through the rest of the book.

Using memory pointers

There are **three** things you need to know in order to use pointers to read and write data.



Get the address of a variable.

You've already seen that you can find where a variable is stored in memory using the & operator:

The %p format will int
$$x = 4$$
; print out the location in hex (base 16) format. printf("x lives at $p\n$ ", &x);

But once you've got the address of a variable, you may want to store it somewhere. To do that, you will need a **pointer variable**. A pointer variable is just a variable that stores a memory address. When you declare a pointer variable, you need to say what kind of data is stored at the address it will point to:

This is a pointer variable for ____ int *address_of_x = &x; an address that stores an int.



Read the contents of an address.

When you have a memory address, you will want to read the data that's stored there. You do that with the * operator:


The * and & operators are opposites. The & operator takes a piece of data and tells you where it's stored. The * operator takes an address and tells you what's stored there. Because pointers are sometimes called *references*, the * operator is said to **dereference** a pointer.




Change the contents of an address.

If you have a pointer variable and you want to change the data at the address where the variable's pointing, you can just use the * operator again. But this time you need to use it on the **left side** of an assignment:

OK, now that you know how to read and write the contents of a memory location, it's time for you to fix the go_south_east() function.

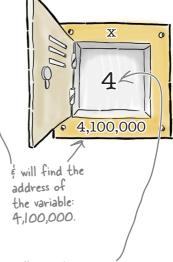

This will read the contents at the memory address given by address_of_x. This will be set to 4: the value originally stored in the x variable.




This will change the contents of the original x variable to 99.



Compass Magnets

Now you need to fix the $go_south_east()$ function so that it uses pointers to update the correct data. Think carefully about what type of data you want to pass to the function, and what operators you'll need to use to update the location of the ship.

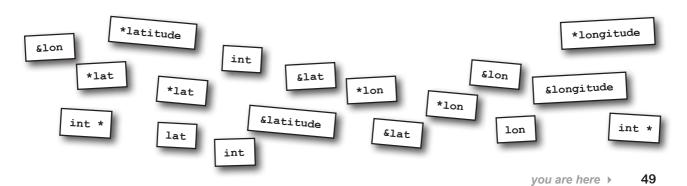




Compass Magnets Solution

You needed to fix the <code>go_south_east()</code> function so that it uses pointers to update the correct data. You were to think carefully about what type of data you want to pass to the function, and what operators you'll need to use to update the location of the ship.


```
The arguments will store pointers
#include <stdio.h>
                                  so they need to be int *.
                                                        int *
void go_south_east(
                                                                    lon)
                                                         *lat can read the old value and set the new value.
                                *lat
         *lat
                               *lon
int main()
                                   You need to find the address
                                    of the latitude and longitude
  int latitude = 32;
                                    variables with $.
  int longitude = -64;
                        &latitude
                                           &longitude
  go south east (
  printf("Avast! Now at: [%i, %i]\n", latitude, longitude);
  return 0;
```

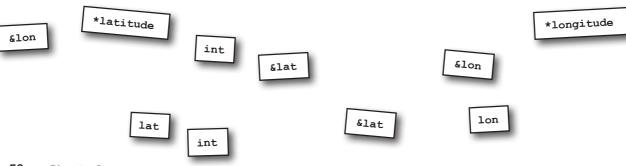

50 Chapter 2



Now if you compile and run the *new* version of the function, you get this:

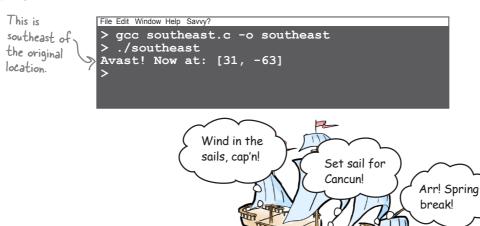

The code works.

Because the function takes pointer arguments, it's able to update the original latitude and longitude variables. That means that you now know how to create functions that not only return values, but can also update any memory locations that are passed to them.



BULLET POINTS

- Variables are allocated storage in memory.
- Local variables live in the stack.
- Global variables live in the globals section.
- Pointers are just variables that store memory addresses.
- The & operator finds the address of a variable.
- The * operator can read the contents of a memory address.
- The * operator can also set the contents of a memory address.

Dumb Questions

Are pointers actual address locations? Or are they some other kind of reference?

A: They're actual numeric addresses in the process's memory.

Q: What does that mean?

A: Each process is given a simplified version of memory to make it look like a single long sequence of bytes.

Q: And memory's not like that?

A: It's more complicated in reality. But the details are hidden from the process so that the operating system can move the process around in memory, or unload it and reload it somewhere else.

Q: Is memory not just a long list of bytes?

The computer will probably structure its physical memory in a more complex way. The machine will typically group memory addresses into separate banks of memory chips.

O: Do I need to understand this?

A: For most programs, you don't need to worry about the details of how the machine arranges its memory.

Why do I have to print out pointers using the %p format string?

A: You don't have to use the %p string. On most modern machines, you can use %li—although the compiler may give you a warning if you do.

Why does the %p format display the memory address in hex format?

A: It's the way engineers typically refer to memory addresses.

If reading the contents of a memory location is called *dereferencing*, does that mean that pointers should be called *references*?

A: Sometimes coders will call pointers references, because they refer to a memory location. However, C++ programmers usually reserve the word reference for a slightly different concept in C++.

Oh yeah, C++. Are we going to look at that?

A: No, this book looks at C only.

How do you pass a string to a function?

You know how to pass simple values as arguments to functions, but what if you want to send something more complex to a function, like a string? If you remember from the last chapter, strings in C are actually arrays of characters. That means if you want to pass a string to a function, you can do it like this:



```
void fortune_cookie(char msg[])
{
    printf("Message reads: %s\n", msg);
}
char quote[] = "Cookies make you fat";
fortune cookie(quote);
```

The msg argument is defined like an array, but because you won't know how long the string will be, the msg argument doesn't include a length. That *seems* straightforward, but there's something a little strange going on...

Honey, who shrank the string?

C has an operator called **sizeof** that can tell you how many bytes of space something takes in memory. You can either call it with a data type or with a piece of data:

```
On most machines, this sizeof(int)

will return 9, which is 8

will return the value 4. sizeof("Turtles!") characters plus the O end character.
```

But a strange thing happens if you look at the length of the string you've passed in the function:

```
void fortune_cookie(char msg[])
{
  printf("Message reads: %s\n", msg);
  printf("msg occupies %i bytes\n", sizeof(msg));
}
```

8??? And on some _ machines, this might even say 4! What gives?

```
File Edit Window Help TakeAByte

> ./fortune_cookie

Message reads: Cookies make you fat
msg occupies 8 bytes

>
```

Instead of displaying the full length of the string, the code returns just 4 or 8 bytes. What's happened? Why does it think the string we passed in is shorter?



Why do you think sizeof (msg) is shorter than the length of the whole string? What is msg? Why would it return different sizes on different machines?

Array variables are like pointers...

When you create an array, the array variable can be used as a **pointer** to the start of the array in memory. When C sees a line of code in a function like this:



You can use "quote" as a pointer variable, even though it's an array.

The computer will set aside space on the stack for each of the characters in the string, plus the \0 end character. But it will also associate the **address of the first character** with the quote variable. Every time the quote variable is used in the code, the computer will substitute it with the address of the first character in the string. In fact, the array variable is *just like a pointer*:

printf("The quote string is stored at: $p\n$ ", quote);

```
|f you write a test program > ./where_is_quote
to display the address, you
will see something like this.
|File Edit Window Help TakeAByte
> ./where_is_quote
The quote string is stored at: 0x7fff69d4bdd7
>
```

...so our function was passed a pointer

That's why that weird thing happened in the fortune_cookie() code. Even though it looked like you were passing a string to the fortune_cookie() function, you were actually just passing a pointer to it:

```
msg is actually a pointer variable

void fortune_cookie(char msg[])

msg points to the message.

printf("Message reads: %s\n", msg);

printf("msg occupies %i bytes\n", sizeof(msg));

sizeof(msg) is just the size of a pointer.
```

And that's why the sizeof operator returned a weird result. It was just returning the size of a **pointer to a string**. On 32-bit operating systems, a pointer takes 4 bytes of memory and on 64-bit operating systems, a pointer takes 8 bytes.

What the computer thinks when it runs your code

1 The computer sees the function.



Then it sees the function contents.


```
printf("Message reads: %s\n", msg);
printf("msg occupies %i bytes\n", sizeof(msg));
```



0 0

I can print the message because I know it starts at location msg. sizeof(msg). That's a pointer variable, so the answer is 8 bytes because that's how much memory it takes for me to store a pointer.

The computer calls the function.

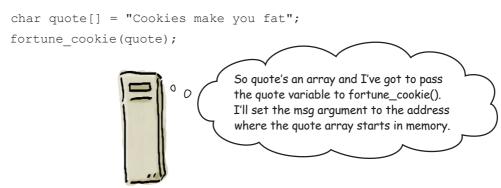



BULLET POINTS

- An array variable can be used as a pointer.
- The array variable points to the first element in the array.
- If you declare an array argument to a function, it will be treated as a pointer.
- The sizeof operator returns the space taken by a piece of data.
- You can also call sizeof for a data type, such as sizeof (int).
- sizeof(a pointer) returns4 on 32-bit operating systems and 8on 64-bit.

there are no **Dumb Questions**

Q: Is sizeof a function?

A: No, it's an operator.

What's the difference?

A: An operator is compiled to a sequence of instructions by the compiler. But if the code calls a function, it has to jump to a separate piece of code.

So is sizeof calculated when the program is compiled?

A: Yes. The compiler can determine the size of the storage at compile time.

Q: Why are pointers different sizes on different machines?

A: On 32-bit operating systems, a memory address is stored as a 32-bit number. That's why it's called a 32-bit system. 32 bits == 4 bytes. That's why a 64-bit system uses 8 bytes to store an address.

If I create a pointer variable, does the pointer variable live in memory?

A: Yes. A pointer variable is just a variable storing a number.

Q: So can I find the address of a pointer variable?

A: Yes—using the & operator.

Q: Can I convert a pointer to an ordinary number?

A: On most systems, yes. C compilers typically make the long data type the same size as a memory address. So if p is a pointer and you want to store it in a long variable a, you can type a = (long) p. We'll look at this in a later chapter.

On *most* systems? So it's not guaranteed?

A: It's not guaranteed.



We have a classic trio of bachelors ready to play *The Mating Game* today.

Tonight's lucky lady is going to pick one of these fine contestants. Who will she choose?



```
#include <stdio.h>
int main()
{
  int contestants[] = {1, 2, 3};
  int *choice = contestants;
  contestants[0] = 2;
  contestants[1] = contestants[2];
  contestants[2] = *choice;
  printf("I'm going to pick contestant number %i\n", contestants[2]);
  return 0;
}
```



We had a classic trio of bachelors ready to play *The Mating Game* today.

Tonight's lucky lady picked one of these fine contestants. Who did she choose?




But array variables aren't quite pointers

Even though you can use an array variable as a pointer, there are still a few differences. To see the differences, think about this piece of code.

sizeof (an array) is...the size of an array.

You've seen that sizeof (a pointer) returns the value 4 or 8, because that's the size of pointers on 32- and 64-bit systems. But if you call sizeof on an array variable, C is smart enough to understand that what you want to know is **how big the array is in memory**.

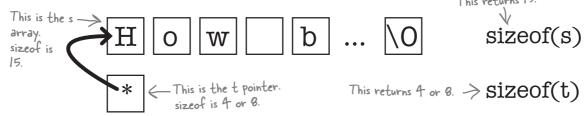

The address of the array...is the address of the array.

A pointer variable is just a variable that stores a memory address. But what about an array variable? If you use the & operator on an array variable, the result equals the array variable itself.

$$\&s == s$$
 &t != t

If a coder writes &s, that means "What is the address of the s array?" The address of the s array is just...s. But if someone writes &t, that means "What is the address of the t variable?"

An array variable can't point anywhere else.

When you create a pointer variable, the machine will allocate 4 or 8 bytes of space to store it. But what if you create an array? The computer will allocate space to store the array, but it won't allocate *any* memory to store the array variable. The compiler simply plugs in the address of the start of the array.

But because array variables don't have allocated storage, it means you can't point them at anything else.

This will give a compile error. \rightarrow s = t;

Pointer decay

Because array variables are slightly different from pointer variables, you need to be careful when you assign arrays to pointers. If you assign an array to a pointer variable, then the pointer variable will only contain the **address** of the array. The pointer doesn't know anything about the size of the array, so a little information has been lost. That loss of information is called **decay**.

Every time you pass an array to a function, you'll decay to a pointer, so it's unavoidable. But you need to keep track of where arrays decay in your code because it can cause very subtle bugs.

Five-Minute

The Case of the Lethal List

dispenser.

The mansion had all the things he'd dreamed of: landscaped grounds, chandeliers, its own bathroom. The 94-year-old owner, Amory Mumford III, had been found dead in the garden, apparently of a heart attack. Natural causes? The doc thought it was an overdose of heart medication. Something stank here, and it wasn't just the dead guy in the gazebo. Walking past the cops in the hall, he approached Mumford's newly widowed 27-year-old wife, Bubbles.

"I don't understand. He was always so careful with his medication. Here's the list of doses." She showed him the code from the drug

int doses[] = $\{1, 3, 2, 1000\};$

"The police say I reprogrammed the dispenser. But I'm no good with technology. They say I wrote this code, but I don't even think it'll compile. Will it?"

She slipped her manicured fingers into her purse and handed him a copy of the program the police had found lying by the millionaire's bed. It certainly didn't look like it would compile...

```
printf("Issue dose %i", 3[doses]);
```

What did the expression 3 [doses] mean? 3 wasn't an array. Bubbles blew her nose. "I could never write that. And anyway, a dose of 3 is not so bad, is it?"

A dose of size 3 wouldn't have killed the old guy. But maybe there was more to this code than met the eye...

Why arrays really start at 0

An array variable can be used as a pointer to the first element in an array. That means you can read the first element of the array either by using the brackets notation or using the \star operator like this:

```
int drinks[] = {4, 2, 3};
of code are
equivalent.
int drinks[] = {4, 2, 3};
printf("1st order: %i drinks\n", drinks[0]);
printf("1st order: %i drinks\n", *drinks);
drinks[0] == *drinks
```

But because an address is just a number, that means you can do **pointer arithmetic** and actually *add* values to a pointer value and find the next address. So you can either use brackets to read the element with index 2, or you can just add 2 to the address of the first element:

```
printf("3rd order: %i drinks\n", drinks[2]);
printf("3rd order: %i drinks\n", *(drinks + 2));
```

In general, the two expressions drinks[i] and * (drinks + i) are equivalent. That's why arrays begin with index 0. The index is just the number that's added to the pointer to find the location of the element.


```
This is at location "drinks."

This is at "drinks + 2."

This is at "drinks + 1."
```

Sharpen your pencil

Use the power of pointer arithmetic to mend a broken heart. This function will skip the first six characters of the text message.

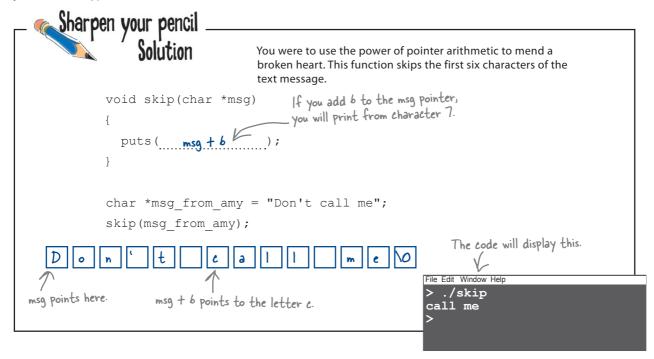

Why pointers have types

If pointers are just addresses, then why do pointer variables have types? Why can't you just store all pointers in some sort of general pointer variable?


The reason is that pointer arithmetic is *sneaky*. If you add 1 to a char pointer, the pointer will point to the very next memory address. But that's just because a char occupies 1 byte of memory.

What if you have an int pointer? ints usually take 4 bytes of space, so if you add 1 to an int pointer, the compiled code will actually add 4 to the memory address.

```
int nums[] = \{1, 2, 3\};
printf("nums is at %p\n", nums);
printf("nums + 1 is at p\n", nums + 1);
```

If you run this code, the two memory address will be *more* than one byte apart. So pointer types exist so that the compiler knows how much to adjust the pointer arithmetic.





Pointer variables have different types for each type of data

The Case of the Lethal List

Last time we left our hero interviewing Bubbles Mumford, whose husband had been given an overdose as a result of suspicious code. Was Bubbles the coding culprit or just a patsy? To find out, read on...

He put the code into his pocket. "It's been a pleasure, Mrs. Mumford. I don't think I need to bother you anymore." He shook her by the hand. "Thank you," she said, wiping the tears from her baby blue eyes, "You've been so kind."

"Not so fast, sister." Bubbles barely had time to gasp before he'd slapped the bracelets on her. "I can tell from your hacker manicure that you know more than you say about this crime." No one gets fingertip calluses like hers without logging plenty of time on the keyboard.



"Bubbles, you know a lot more about C than you let on. Take a look at this code again."

```
int doses[] = {1, 3, 2, 1000};
printf("Issue dose %i", 3[doses]);
```

"I knew something was wrong when I saw the expression 3 [doses]. You knew you could use an array variable like doses as a pointer. The fatal 1,000 dose could be written down like this..." He scribbled down a few coding options on his second-best Kleenex:

```
doses[3] == *(doses + 3) == *(3 + doses) == 3[doses]
```

"Your code was a dead giveaway, sister. It issued a dose of 1,000 to the old guy. And now you're going where you can never corruptly use C syntax again..."



BULLET POINTS

- Array variables can be used as pointers...
- ...but array variables are not quite the same.
- sizeof is different for array and pointer variables.
- Array variables can't point to anything else.
- Passing an array variable to a pointer decays it.
- Arrays start at zero because of pointer arithmetic.
- Pointer variables have types so they can adjust pointer arithmetic.

Dumb Questions

Q: Do I really need to understand pointer arithmetic?

A: Some coders avoid using pointer arithmetic because it's easy to get it wrong. But it can be used to process arrays of data efficiently.

Can I subtract numbers from pointers?

A: Yes. But be careful that you don't go back before the start of the allocated space in the array.

Q: When does C adjust the pointer arithmetic calculations?

A: It happens when the compiler is generating the executable. It looks at the type of the variable and then multiplies the pluses and minuses by the size of the underlying variable.

Q: Go on..

A: If the compiler sees that you are working with an int array and you are adding 2, the compiler will multiply that by 4 (the length of an int) and add 8.

Does C use the sizeof operator when it is adjusting pointer arithmetic?

A: Effectively. The sizeof operator is also resolved at compile time, and both sizeof and the pointer arithmetic operations will use the same sizes for different data types.

Q: Can I multiply pointers?

A: No.

Using pointers for data entry

You already know how to get the user to enter a string from the keyboard. You can do it with the scanf() function:

```
You're going to store a 
Char name [40];

name in this array.

printf("Enter your name: ");

scanf("%39s", name);

scanf will read up to 39 characters

plus the string terminator \O.
```

How does scanf() work? It accepts a char pointer, and in this case you're passing it an array variable. By now, you might have an idea **why** it takes a pointer. It's because the scanf() function is going to *update* the contents of the array. Functions that need to update a variable don't want the value of the variable itself—they want its **address**.

Entering numbers with scanf()

So how do you enter data into a **numeric field**? You do it by passing a *pointer* to a number variable.

```
%i means the user will printf ("Enter your age: "); enter an int value. > scanf ("%i", &age); Use the f operator to get the address of the int.
                                                                           *i Enter an integer.

Enter up to 29 characters (+ '\O').

Enter a floating-point number.
Because you pass the address of a number variable into the
function, scanf() can update the contents of the variable.
And to help you out, you can pass a format string that contains
the same kind of format codes that you pass to the printf()
function. You can even use scanf () to enter more than one
piece of information at a time:
                      char first name[20];
                      char last name[20];
 This reads a
 first name, then
                    printf("Enter first and last name: ");
 a space, then the scanf("%19s %19s", first_name, last_name);
 second name.
                      printf("First: %s Last:%s\n", first name, last name);
                                                                               The first and last names are
        File Edit Window Help Meerkats
         > ./name test
                                                                                stored in separate arrays.
         Enter first and last name: Sanders Kleinfeld
         First: Sanders Last: Kleinfeld
```

Be careful with scanf()

There's a little...problem with the scanf() function. So far, all of the code you've written has very carefully put a limit on the number of characters that scanf() will read into a function:

```
scanf("%39s", name);
scanf("%2s", card name);
```

Why is that? After all, scanf() uses the same kind of format strings as printf(), but when we print a string with printf(), you just use %s. Well, if you just use %s in scanf(), there can be a problem if someone gets a little type-happy:

```
char food[5];
printf("Enter favorite food: ");
scanf("%s", food);
printf("Favorite food: %s\n", food);
```

```
File Edit Window Help TakeAByte

> ./food

Enter favorite food: liver-tangerine-raccoon-toffee
Favorite food: liver-tangerine-raccoon-toffee
Segmentation fault: 11
>
```

SECURITY ALERT!


SECURITY ALERT!

The program crashes. The reason is because scanf () writes data way beyond the end of the space allocated to the food array.

scanf() can cause buffer overflows

If you forget to limit the length of the string that you read with <code>scanf()</code>, then any user can enter far more data than the program has space to store. The extra data then gets written into memory that has not been properly allocated by the computer. Now, you might get lucky and the data will simply be stored and not cause any problems.

But it's *very* likely that buffer overflows will cause bugs. It might be called a *segmentation fault* or an *abort trap*, but whatever the error message that appears, the result will be a *crash*.

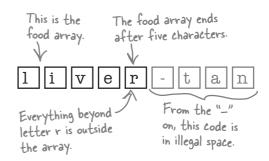

66

fgets() is an alternative to scanf()

There's another function you can use to enter text data: fgets(). Just like the scanf() function, it takes a char pointer, but unlike the scanf () function, the fgets () function must be given a maximum length:

```
printf("Enter favorite food: ");
as before.
              fgets(food, sizeof(food), stdin);
                                                     stdin just means the
                       Next, it takes a maximum size of the string ('/O' included).
                                                      data will be coming
```

That means that you can't accidentally forget to set a length when you call fgets (); it's right there in the function signature as a mandatory argument. Also, notice that the fgets () buffer size **includes** the final \0 character. So you don't need to subtract 1 from the length as you do with scanf().

OK, what else do you need to know about fgets()?

Using sizeof with fgets()

The code above sets the maximum length using the sizeof operator. Be careful with this. Remember: sizeof returns the amount of space occupied by a variable. In the code above, food is an array variable, so sizeof returns the size of the array. If food was just a simple pointer variable, the sizeof operator would have just returned the size of a pointer.

If you know that you are passing an array variable to fgets () function, then using sizeof is fine. If you're just passing a simple pointer, you should just enter the size you want:

```
If food was a simple
                         printf("Enter favorite food: ");
pointer, you'd give an explicit length, rather fgets (food, 5, stdin);
than using size of.
```

stdin later. Tales from the Crypt

from the keyboard.

The fgets() function actually comes from an older function called gets().

Even though fgets() is seen as a safer-to-use function than scanf(), the truth is that the older gets () function is far more dangerous than either of them. The reason? The gets () function has no limits at all:

char dangerous[10]; gets(dangerous);

gets() is a function that's been around for a long time. But all you really need to know is that you really shouldn't use it.

You'll find out

more about

Noooooool1111 Seriously, don't use this.



Title Fight

Roll up! Roll up! It's time for the title fight we've all been waiting for. In the red corner: nimble light, flexible but oh-so-slightly dangerous. It's the bad boy of data input: scanf(). And in the blue corner, he's simple, he's safe, he's the function you'd want to introduce to your mom: it's fgets()!

scanf():

fgets():

Round 1: Limits

Do you limit the number of characters that a user can enter?

scanf () can limit the data entered, so long as you remember to add the size to the format string.

fgets () has a mandatory limit. Nothing gets past him.

Result: fgets() takes this round on points.

Round 2: Multiple fields

Can you be used to enter more than one field?

Yes! scanf() will not only allow you to enter more than one field, but it also allows you to enter **structured data** including the ability to specify what characters appear between fields. Ouch! fgets() takes this one on the chin. fgets() allows you to enter just one string into a buffer. No other data types. Just strings. Just one buffer.

Result: scanf() clearly wins this round.

Round 3: Spaces in strings

If someone enters a string, can it contain spaces?


Oof! scanf() gets hit badly by this one. When scanf() reads a string with the %s, it stops as soon as it hits a space. So if you want to enter more than one word, you either have to call it more than once, or use some fancy regular expression trick. No problem with spaces at all. fgets () can read the whole string every time.

Result: A fightback! Round to fgets().

A good clean fight between these two feisty functions. Clearly, if you need to enter **structured data** with *several* fields, you'll want to use scanf(). If you're entering a **single unstructured string**, then fgets() is probably the way to go.

Anyone for three-card monte?

In the back room of the Head First Lounge, there's a game of three-card monte going on. Someone shuffles three cards around, and you have to watch carefully and decide where you think the Queen card went. Of course, being the Head First Lounge, they're not using real cards; they're using *code*. Here's the program they're using:

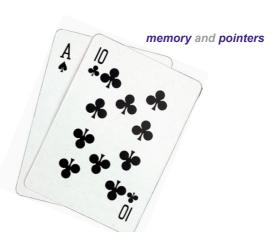

```
#include <stdio.h>

int main()
{
    char *cards = "JQK";
    char a_card = cards[2];
    cards[2] = cards[1];
    cards[1] = cards[0];
    cards[0] = cards[2];
    cards[2] = cards[1];
    cards[2] = cards[1];
    cards[1] = a_card;
    puts(cards);
    return 0;
}
```

Find the Queen.

The code is designed to shuffle the letters in the three-letter string "JQK." Remember: in C, a string is just an array of characters. The program switches the characters around and then displays what the string looks like.

The players place their bets on where they think the "Q" letter will be, and then the code is compiled and run.











Oops...there's a memory problem...

It seems there's a problem with the card shark's code. When the code is compiled and run on the Lounge's notebook computer, this happens:

File Edit Window Help PlaceBet

> gcc monte.c -o monte && ./monte
bus error

What's more, if the guys try the same code on different machines and operating systems, they get a whole bunch of different errors: Darn it. I knew that card shark couldn't be trusted...

0



File Edit Window Help HolyCrap

> gcc monte.c -o monte && ./monte
monte.exe has stopped working

SegPhault!

Kapow!

Bus Error!

Segmentation Error!

What's wrong with the code?



It's time to use your **intuition**. Don't overanalyze. Just **take a guess**. *Read* through these possible answers and select *only* the one you think is correct.

What do **you** think the problem is?

The string can't be updated.	
We're swapping characters outside the string.	
The string isn't in memory.	
Something else.	



It was time to use your **intuition**. You were to read through these possible answers and select *only* the one you think is correct.

What did **you** think the problem was?

The string can't be updated.	
We're swapping characters outside the string.	
The string isn't in memory.	
Something else.	

String literals can never be updated

A variable that points to a string literal can't be used to change the contents of the string:

But if you create an array from a string literal, then you ${\bf can}$ modify it:

It all comes down to how C uses memory...

72 Chapter 2

www.it-ebooks.info



In memory: char *cards="JQK";

To understand why this line of code causes a memory error, we need to dig into the memory of the computer and see exactly what the computer will do.

The computer loads the string literal.

When the computer loads the program into memory, it puts all of the constant values—like the string literal "JQK"—into the constant memory block. This section of memory is **read only**.

2 The program creates the cards variable on the stack.

The stack is the section of memory that the computer uses for local variables: variables inside functions. The cards variable will live here

The cards variable is set to the address of "JQK."

The cards variable will contain the address of **the string literal "JQK.**" String literals are usually stored in read-only memory to prevent anyone from changing them.


The computer tries to change the string.

When the program tries to change the contents of the string pointed to by the cards variable, it can't; the string is read-only.

I can't update that, buddy. It's in the constant memory block, so it's read-only.

So the problem is that string literals like "JQK" are held in read only memory. They're constants.

But if that's the problem, how do you fix it?

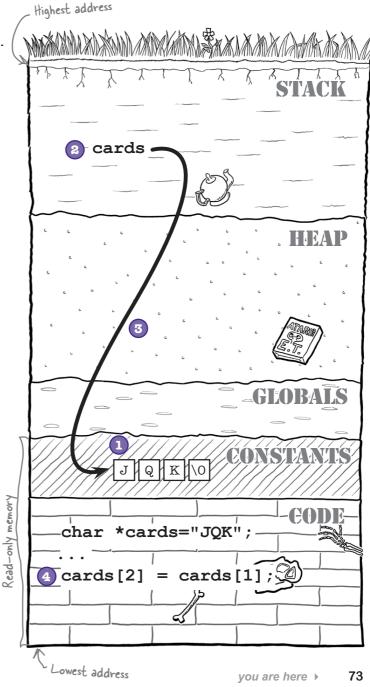

If you're going to change a string, make a copy


The truth is that if you want to change the contents of a string, you'll need to work on a *copy*. If you create a copy of the string in an area of memory that's *not* read-only, there won't be a problem if you try to change the letters it contains.

But how do you make a copy? Well, just create the string as a *new array*.

```
char cards[] = "JQK"; a pointer. cards is now an array.
```

It's probably not too clear why this changes anything. *All* strings are arrays. But in the old code, cards was just a *pointer*. In the new code, it's an *array*. If you declare an array called cards and then set it to a string literal, the cards array will be a completely new copy. The variable isn't just *pointing* at the string literal. It's a brand-new array that contains a fresh *copy* of the string literal.

To see how this works in practice, you'll need to look at what happens in memory.

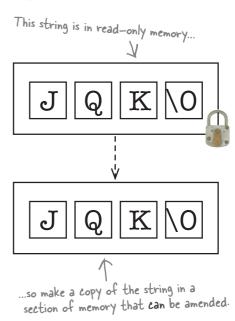



Geek Bits

cards[] or cards*?

If you see a declaration like this, what does it *really* mean?

char cards[]

Well, it **depends on where you see it**. If it's a normal variable declaration, then it means that cards is an array, and you have to set it to a value immediately:

```
int my_function()
{

cards is > char cards[] = "JQK";

an array.

There's no array size given, so you have
to set it to something immediately.
```

But if cards is being declared as a *function argument*, it means that cards is a **pointer**:

```
void stack_deck(char cards[])

{
... cards is a char pointer
}

void stack_deck(char *cards)

{
... }

These two functions are equivalent.
```



In memory: char cards[1="JQK";

We've already seen what happens with the *broken code*, but what about our new code? Let's take a look.


- 1 The computer loads the string literal. As before, when the computer loads the program into memory, it stores the constant values—like the string "JQK"—into read-only memory.
- The program creates a new array on the stack.

 We're declaring an array, so the program will create one large enough to store the "JQK"

string—four characters' worth.

The program initializes the array.
But as well as allocating the space, the program will also **copy the contents** of the string literal "JQK" into the stack memory.

So the difference is that the original code used a pointer to point to a read-only string literal. But if you initialize an array with a string literal, you then have a *copy* of the letters, and you can change them as much as you like.

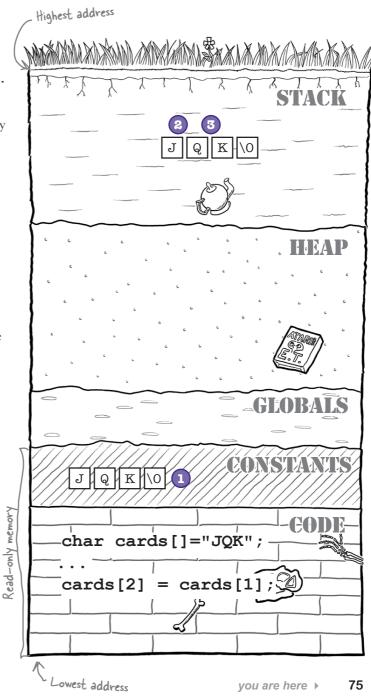

www.it-ebooks.info



See what happens if you construct a **new array** in the code.

```
#include <stdio.h>
                                    File Edit Window Help Where'sTheLady?
                                       gcc monte.c -o monte && ./monte
int main()
  char cards[] = "JQK";
  char a card = cards[2];
  cards[2] = cards[1];
                                                             Yes! The Queen
  cards[1] = cards[0];
                                                              was the first
  cards[0] = cards[2];
                                                              card. I knew it...
  cards[2] = cards[1];
  cards[1] = a_card;
  puts(cards);
  return 0;
The code works! Your cards variable now points to a string in an
unprotected section of memory, so we are free to modify its contents.
```



Geek Bits -

One way to avoid this problem in the future is to never write code that sets a simple char pointer to a string literal value like:

```
char *s = "Some string";
```

There's nothing wrong with setting a pointer to a string literal—the problems only happen when you try to modify a string literal. Instead, if you want to set a pointer to a literal, always make sure you use the const keyword:

```
const char *s = "some string";
```

That way, if the compiler sees some code that tries to modify the string, it will give you a compile error:

```
s[0] = 'S'; monte.c:7: error: assignment of read-only location
```

The Case of the Magic Bullet

He was scanning his back catalog of *Guns 'n' Ammo* into Delicious Library when there was a knock at the door and she walked in: 5' 6", blonde, with a good laptop bag and cheap shoes. He could tell she was a code jockey. "You've gotta help me...you gotta clear his name! Jimmy was innocent, I tells you. Innocent!" He passed her a tissue to wipe the tears from her baby blues and led her to a seat.

It was the old story. She'd met a guy, who knew a guy. Jimmy Blomstein worked tables at the local Starbuzz and spent his weekends cycling and working on his taxidermy collection. He hoped one day to save up enough for an elephant. But he'd fallen in with the wrong crowd. The Masked Raider had met Jimmy in the morning for coffee and they'd both been alive:

```
char masked_raider[] = "Alive";
char *jimmy = masked_raider;
  printf("Masked raider is %s, Jimmy is %s\n", masked_raider,
    jimmy);
```

```
File Edit Window Help
Masked raider is Alive, Jimmy is Alive
```

Then, that afternoon, the Masked Raider had gone off to pull a heist, like a hundred heists he'd pulled before. But this time, he hadn't reckoned on the crowd of G-Men enjoying their weekly three-card monte session in the back room of the Head First Lounge. You get the picture. A rattle of gunfire, a scream, and moments later the villain was lying on the sidewalk, creating a public health hazard:

```
masked_raider[0] = 'D';
masked_raider[1] = 'E';
masked_raider[2] = 'A';
masked_raider[3] = 'D';
masked_raider[4] = '!';
```

Five-Minute

Mystery

Problem is, when Toots here goes to check in with her boyfriend at the coffee shop, she's told he's served his last orange mocha frappuccino:

```
printf("Masked raider is %s, Jimmy is %s\n", masked raider, jimmy);
```

```
File Edit Window Help

Masked raider is DEAD!, Jimmy is DEAD!
```

So what gives? How come a single magic bullet killed Jimmy and the Masked Raider? What do you think happened?

you are here → 77

The Case of the Magic Bullet

How come a single magic bullet killed Jimmy and the Masked Raider?

Jimmy, the mild-mannered barista, was mysteriously gunned down at the same time as arch-fiend the Masked Raider:

```
#include <stdio.h>
int main()
  char masked raider[] = "Alive";
  char *jimmy = masked raider;
  printf("Masked raider is %s, Jimmy is %s\n", masked_raider, jimmy);
  masked raider[0] = 'D';
  masked raider[1] = 'E';
  masked raider[2] = 'A';
  masked raider[3] = 'D';
  masked_raider[4] = '!';
  printf("Masked raider is %s, Jimmy is %s\n", masked raider, jimmy);
  return 0;
        Note from Marketing: ditch the product placement
        for the Brain Booster drink; the deal fell through.
It took the detective a while to get to the bottom of the mystery. While he was waiting,
he took a long refreshing sip from a Head First Brain Booster Fruit Beverage. He sat
back in his seat and looked across the desk at her blue, blue eyes. She was like a rabbit caught
```

"I'm afraid I got some bad news for you. Jimmy and the Masked Raider...were one and the same man!"
"No!"

in the headlights of an oncoming truck, and he knew that he was at the wheel.

She took a sharp intake of breath and raised her hand to her mouth. "Sorry, sister. I have to say it how I see it. Just look at the memory usage." He drew a diagram:



"jimmy and masked_raider are just aliases for the same memory address. They're pointing to the same place. When the masked_raider stopped the bullet, so did Jimmy. Add to that this invoice from the San Francisco elephant sanctuary and this order for 15 tons of packing material, and it's an open and shut case."



BULLET POINTS

- If you see a * in a variable declaration, it means the variable will be a pointer.
- String literals are stored in read-only memory.
- If you want to modify a string, you need to make a copy in a new array.
- You can declare a char pointer as const char * to prevent the code from using it to modify a string.

bumb Questions

Why didn't the compiler just tell me I couldn't change the string?

A: Because we declared the cards as a simple char *, the compiler didn't know that the variable would always be pointing at a string literal.

Why are string literals stored in read-only memory?

A: Because they are designed to be constant. If you write a function to print "Hello World," you don't want some other part of the program modifying the "Hello World" string literal.

Do all operating systems enforce the read-only rule?

A: The vast majority do. Some versions of gcc on Cygwin actually allow you to modify a string literal without complaining. But it is always wrong to do that.

What does const actually mean? Does it make the string read-

A: String literals are read-only anyway.

The const modifier means that the compiler will complain if you try to modify an array with that particular variable.

Do the different memory segments always appear in the same order in memory?

They will always appear in the same order for a given operating system. But different operating systems can vary the order slightly. For example, Windows doesn't place the code in the lowest memory addresses.

I still don't understand why an array variable isn't stored in memory. If it exists, surely it lives somewhere?

A: When the program is compiled, all the references to array variables are replaced with the addresses of the array. So the truth is that the array variable won't exist in the final executable. That's OK because the array variable will never be needed to point anywhere else.

literal, will the program really copy the contents each time?

A: It's down to the compiler. The final machine code will either copy the bytes of the string literal to the array, or else the program will simply set the values of each character every time it reaches the declaration.

You keep saying "declaration." What does that mean?

A: A declaration is a piece of code that declares that something (a variable, a function) exists. A definition is a piece of code that says what something is. If you declare a variable and set it to a value (e.g., int x = 4;), then the code is both a declaration and a definition.

Why is scanf() called scanf()?

A: scanf() means "scan formatted" because it's used to scan formatted input.



Memory memorizer

Stack

This is the section of memory used for **local variable storage**. Every time you call a function, all of the function's local variables get created on the stack. It's called the *stack* because it's like a stack of plates: variables get added to the stack when you enter a function, and get taken off the stack when you leave. Weird thing is, the stack actually works upside down. It starts at the top of memory and **grows downward**.

Heap

This is a section of memory we haven't really used yet. The heap is for **dynamic memory:** pieces of data that get created when the program is running and then hang around a long time. You'll see later in the book how you'll use the heap.

Globals

A global variable is a variable that lives outside all of the functions and is visible to all of them. Globals get created when the program first runs, and you can update them freely. But that's unlike...


Constants

Constants are *also* created when the program first runs, but they are stored in **read-only** memory. Constants are things like *string literals* that you will need when the program is running, but you'll never want them to change.

Code

Finally, the code segment. A lot of operating systems place the code right down in the lowest memory addresses. The code segment is also read-only. This is the part of the memory where the actual assembled code gets loaded.

80 Chapter 2

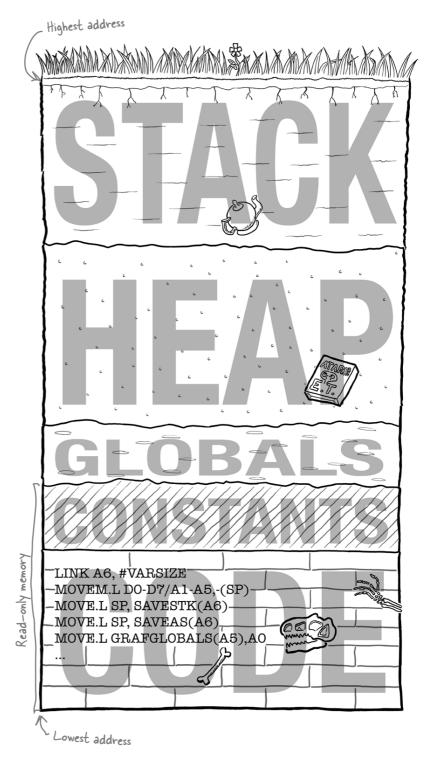


www.it-ebooks.info


Your C Toolbox

You've got Chapter 2 under your belt, and now you've added pointers and memory to your toolbox. For a complete list of tooltips in the book, see Appendix ii.





2.5 strings

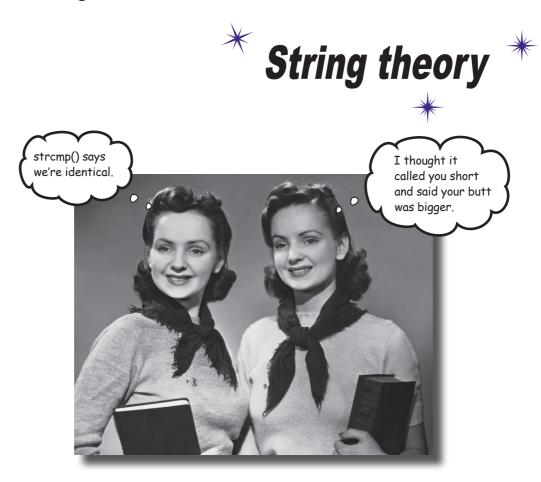

There's more to strings than reading them.


You've seen how strings in C are actually char arrays but what does C allow you to do with them? That's where **string.h** comes in. **string.h** is part of the C Standard Library that's dedicated to **string manipulation**. If you want to **concatenate** strings together, **copy** one string to another, or **compare** two strings, the functions in **string.h** are there to help. In this chapter, you'll see how to create an **array of strings**, and then take a close look at how to **search within strings** using the **strstr()** function.

Frank Pesperately seeking Susan

There are so many tracks on the retro jukebox that people can't find the music they are looking for. To help the customers, the guys in the Head First Lounge want you to write another program.

This is the track list:

Tracks from the new album "Little Known Sinatra."

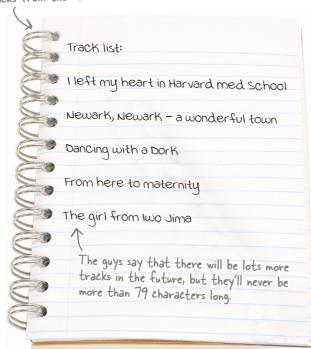

The list is likely to get longer, so there's just the first few tracks for now. You'll need to write a C program that will ask the user which track she is looking for, and then get it to search through all of the tracks and display any that match.

Gah! Wayne Newton...
again! We need a search
program to help people find
tracks on the jukebox.

0






There'll be lots of strings in this program. How do you think you can record that information in C?

Create an array of arrays

There are several track names that you need to record. You can record several things at once in an array. But remember: *each string is itself an array*. That means you need to create an array of arrays, like this:

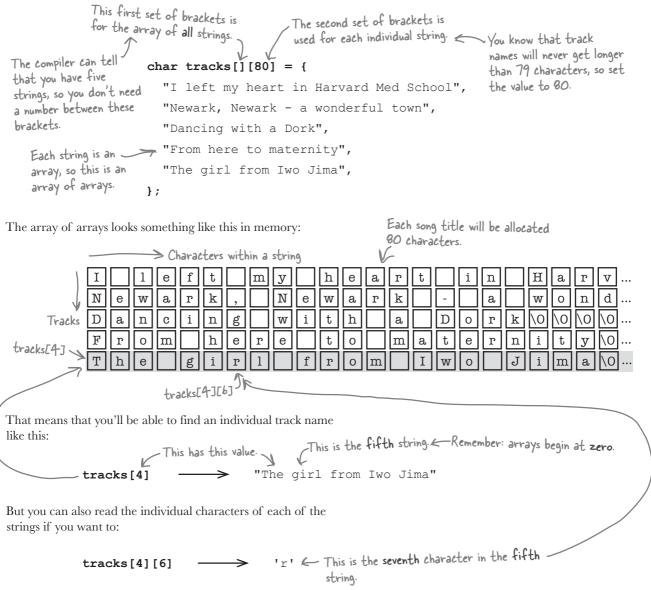

So now that you know how to record the data in C, what do you need to do with it?

Find strings containing the search text

The guys have helpfully given you a spec.

Well, you know how to record the tracks. You also know how to read the value of an individual track name, so it shouldn't be too difficult to loop through each of them. You even know how to ask the user for a piece of text to search for. But how do you look to see if the track name contains a given piece of text?

see if the track name contains a given piece of text?

Using string.h

The **C Standard Library** is a bunch of useful code that you get for free when you install a C compiler. The library code does useful stuff like opening files, or doing math, or managing memory. Now, chances are, you won't want to use the *whole* of the Standard Library at once, so the library is broken up into several sections, and each one has a **header** file. The header file lists all of the functions that live in a particular section of the library.

So far, you have only really used the *stdio.h* header file. *stdio.h* lets you use the standard *input/output* functions like printf and scanf.

But the Standard Library also contains code to *process strings*. String processing is required by a lot of the programs, and the string code in the Standard Library is tested, stable, and fast.


Ask the user for the text she's looking for.
Loop through all of the track names.

If a track name contains the search text, display the track name.




You include the string code into your program using the **string.h** header file. You add it at the top of your program, just like you include *stdio.h*.

#include <stdio.h> You'll use both stdio.h and
#include <string.h> string.h in your jukebox program.

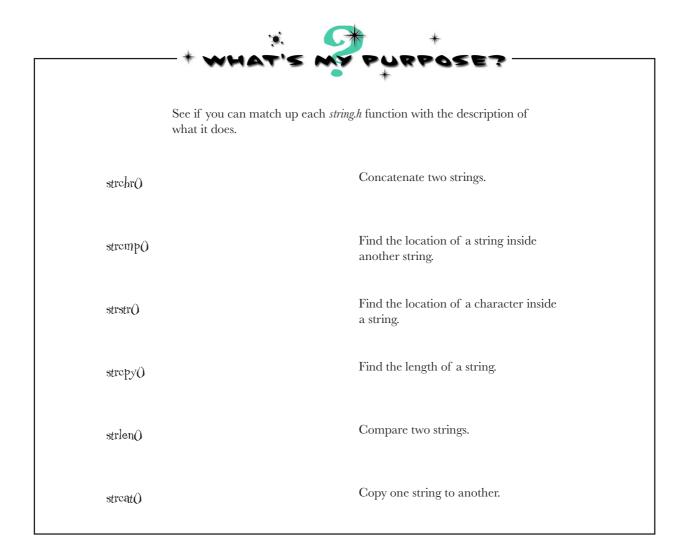


_ Sharpen your pencil	
	Which of the functions above should you use for the jukebox program? Write your answer below.

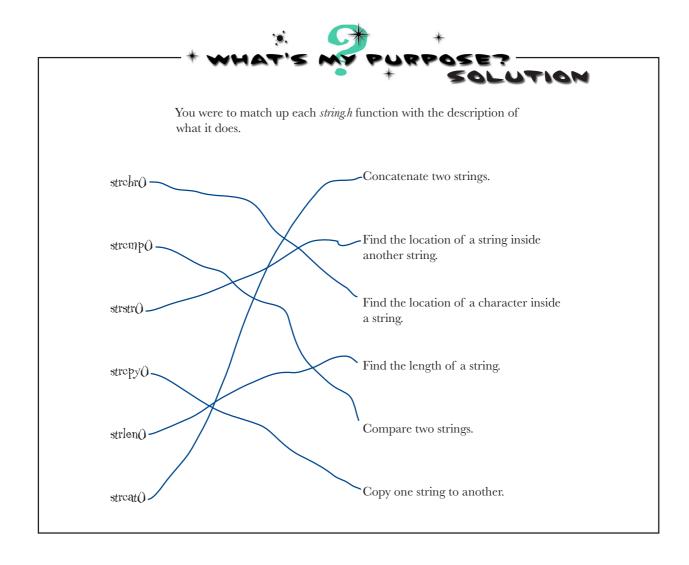

_ «Sharpen your pencil —	
Solution	You were to write which of the above functions you should use for the jukebox program.
	strstr()

Using the strstr() function

So how exactly does the strstr() function work? Let's look at an example. Let's say you're looking for the string "fun" inside a larger string, "dysfunctional." You'd call it like this:

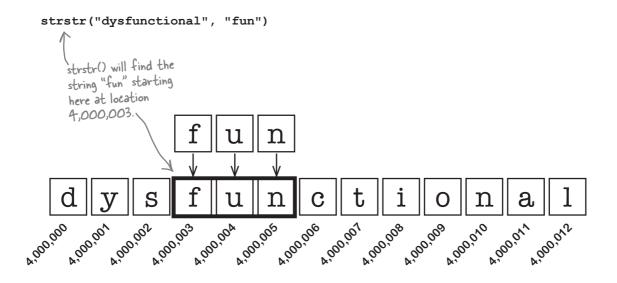

The strstr() function will search for the second string in the first string. If it finds the string, it will return the address of the located string in memory. In the example here, the function would find that the fun substring begins at memory location 4,000,003.

But what if the strstr() can't find the substring? What then? In that case, strstr() returns the value 0. Can you think why that is? Well, if you remember, C treats zero as *false*. That means you can use strstr() to check for the *existence* of one string inside another, like this:


```
char s0[] = "dysfunctional";
char s1[] = "fun";
if (strstr(s0, s1))
  puts("I found the fun in dysfunctional!");
```

Let's see how we can use strstr() in the jukebox program.

Pool Puzzle

The guys in the Lounge had already started to write the code to search through the track list, but—oh no!—some of the paper they were writing the code on has fallen into the pool. Do you think you can select the correct pieces of code to complete the search function? It's been a while since the pool was cleaned, so be warned: some of the code in the pool might not be needed for this program.

Note: the guys have slipped in a couple of new pieces of code they found in a book somewhere. Hey, look: you're creating a separate function. Presumably, when you get around to writing "void" just means this function the main() function, it will call this. won't return a value. Void find_track(char search_for[]) This is where you're checking to see if the search term is contained in the track name. int i; This is the "for loop." We'll look at this in more \longrightarrow for (i = 0; i < 5; i++) { detail in a while, but for now you just need to know You're going to One value will The other will be printing out need to be be a string. that it will run this piece of code five times. two values here. an integer.

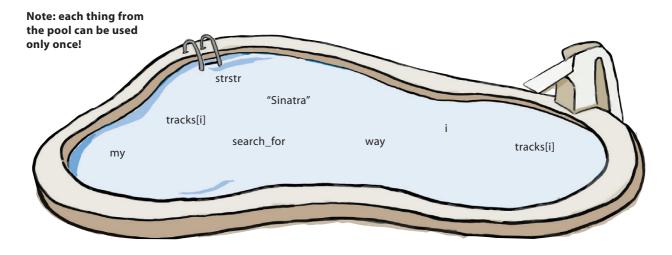

BE the Compiler

The jukehox program needs a main() function that reads input from the user and calls the find track() function on the

opposite page. Your job is to play like you're the compiler and say which of the following main() functions is the one you need for the

jukebox program.

```
int main()
{
   char search_for[80];
   printf("Search for: ");
   fgets(search_for, 80, stdin);
   find_track();
   return 0;
}
```

```
char search_for[80];
printf("Search for: ");
fgets(search_for, 79, stdin);
find_track(search_for);
return 0;
}
```

int main()

```
int main()
{
   char search_for[80];
   printf("Search for: ");
   fgets(search_for, 80, stdin);
   find_track(search_for);
   return 0;
}
```


```
int main()
{
   char search_for[80];
   printf("Search for: ");
   scanf(search_for, 80, stdin);
   find_track(search_for);
   return 0;
}
```

Pool Puzzle Solution

The guys in the Lounge had already started to write the code to search through the track list, but—oh no!—some of the paper they were writing the code on has fallen into the pool. You were to select the correct pieces of code to complete the search function.

Note: the guys have slipped in a couple of new pieces of code they found in a book somewhere.

```
void find_track(char search_for[])
{
  int i;
  for (i = 0; i < 5; i++) {
    if (__strstr___(_tracks[i]__, search_for__))
      printf("Track %i: '%s'\n", ___i___, __tracks[i]__);
  }
}</pre>
```

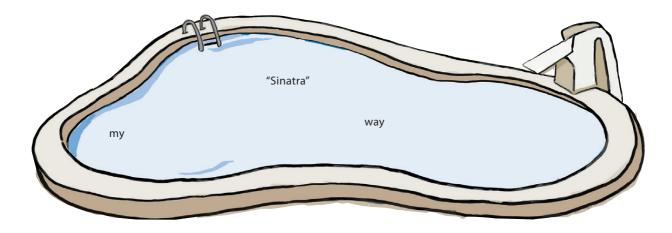

BE the Compiler Solution

The jukebox program needs a main() function that reads input from the user and calls the find track() function on

the opposite page. Your job was to play like you're the compiler and say which of the following main() functions is the one you

need for the jukebox program.

```
int main()
{
   char search_for[80];
   printf("Search for: ");
   fgets(search_for, 80, stdin);
   find_track();
   find_track() is being
   return 0;
   called without passing
   the search term.
```

```
This version isn't using the full length of the array.

The coder has subtracted one from the length, like you would with scanf().

{
    char search_for[80];
    printf("Search for: ");
    fgets(search_for, 79, stdin);
    find_track(search_for);
    return 0;
}
```

```
This is the correct
int main() main() function.

{
    char search_for[80];
    printf("Search for: ");
    fgets(search_for, 80, stdin);
    find_track(search_for);
    return 0;
}
```

```
This version is using scanf() and would allow the user to enter 8 characters into the array.

{
   char search_for[80];
   printf("Search for: ");
   scanf(search_for, 80, stdin);
   find_track(search_for);
   return 0;
}
```

It's time for a code review

Let's bring the code together and review what you've got so far:

```
You still need to stdio.h for the
                                  #include <stdio.h>
                                                                 You will also need the string.h
  printf() and scanf() functions.
                                  #include <string.h> /
                                                                 header, so you can search
                                                                 with the strstr() function.
      You'll set the tracks array.
                                  char tracks[][80] = {
      outside of the main() and
                                     "I left my heart in Harvard Med School",
     find_track() functions; that
                                     "Newark, Newark - a wonderful town",
     way, the tracks will be usable
                                     "Dancing with a Dork",
     everywhere in the program.
                                     "From here to maternity",
                                     "The girl from Iwo Jima",
                                  };
This is your new find track() -
                                  void find track(char search for[])
function. You'll need to declare it
here before you call it from main().
                                     int i;
                                     for (i = 0; i < 5; i++)
       This code will display all -
                                     if (strstr(tracks[i], search for))
       the matching tracks.
                                          printf("Track %i: '%s'\n", i, tracks[i]);
  And this is your main() function,
                                 ု int main()
  which is the starting point of

    You're asking for the
search text here.

  the program.
                                     char search_for[80];
                                     printf("Search for: ");
                                     fgets(search for, 80, stdin);
                                                                      Now you call your new
                                     find track(search for);
                                                                      find_track() function and
                                                                      display the matching tracks.
```

It's important that you assemble the code in this order. The headers are included at the top so that the compiler will have all the correct functions before it compiles your code. Then you define the tracks before you write the functions. This is called putting the tracks array in **global scope**. A global variable is one that lives outside any particular function. Global variables like tracks are available to all of the functions in the program.

Finally, you have the functions: find_track() first, followed by main(). The find_track() function needs to come first, *before* you call it from main().



It's time to fire up the terminal and see if the code works.

```
File Edit Window Help string.h

> gcc text_search.c -o text_search && ./text_search
Search for: town
Track 1: 'Newark, Newark - a wonderful town'
>
```

And the great news is, the program works!

Even though this program is a little longer than any code you've written so far, it's actually doing a lot more. It creates an array of strings and then uses the string library to search through all of them to find the music track that the user was looking for.





Geek Bits

For more information about the functions available in *string.h*, see *http://tinyurl.com/82acwue*.

If you are using a Mac or a Linux machine, you can find out more about each of the *string.h* functions like strstr() by typing:

man strstr

there are no **Dumb Questions**

Why is the list of tracks defined as tracks[][80]? Why not tracks[5][80]?

You could have defined it that way, but the compiler can tell there are five items in the list, so you can skip the [5] and just put [].

But in that case, why couldn't we just say tracks[][]?

A: The track names are all different lengths, so you need to tell the compiler to allocate enough space for even the largest.

Does that mean each string in the tracks array is 80 characters, then?

A: The program will allocate 80 characters for each string, even though each of them is much smaller.

So the tracks array takes 80 × 5 characters = 400 characters' worth of space in memory?

A: Yes

What happens if I forget to include a header file like string.h?

For some header files, the compiler will give you a warning and then include them anyway. For other header files, the compiler will simply give a compiler error.

Why did we put the tracks array definition outside of the functions?

A: We put it into global scope. Global variables can be used by all functions in the program.

Now that we've created two functions, how does the computer know which one to run first?

A: The program will always run the main () function first.

Why do I have to put the find_track() function before main()?

A: C needs to know what parameters a function takes and what its return type is before it can be called.

What would happen if I put the functions in a different order?

A: In that case, you'd just get a few warnings.



RULLET POINTS

- You can create an array of arrays with char strings [...] [...].
- The first set of brackets is used to access the outer array.
- The second set of brackets is used to access the details of each of the inner arrays.
- The string.h header file gives you access to a set of string manipulation functions in the C Standard Library.
- You can create several functions in a C program, but the computer will always run main() first.



Code Magnets

The guys are working on a new piece of code for a game. They've created a function that will display a string backward on the screen. Unfortunately, some of the fridge magnets have moved out of place. Do you think you can help them to reassemble the code?

```
void print_reverse (char *s)

size_t is just an integer used for storing the sizes of things.

Size_t len = strlen(s); String, so strlen("ABC") == 3.

char *t = _____ + ____ - 1;

while ( _____ >= ____ ) {
    printf("%c", *t);

t = _____;

puts("");
}
```

s t t

you are here >



Code Magnets Solution

The guys are working on a new piece of code for a game. They've created a function that will display a string backward on the screen. Unfortunately, some of the fridge magnets have moved out of place. You were to help them to reassemble the code.

Array of arrays vs. array of pointers


You've seen how to use an array of arrays to store a sequence of strings, but another option is to use an **array of pointers**. An array of pointers is actually what it sounds like: a list of memory addresses stored in an array. It's very useful if you want to quickly create a list of string literals:

You can access the array of pointers just like you accessed the array of arrays.



C-Cross

Now that the guys have the print_reverse() function working, they've used it to create a crossword. The answers are displayed by the output lines in the code.

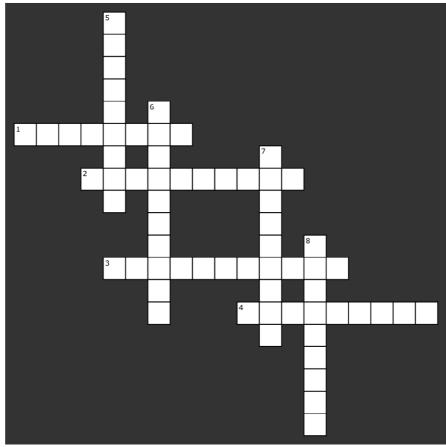

Across

```
int main()
   char *juices[] = {
     "dragonfruit", "waterberry", "sharonfruit", "uglifruit",
     "rumberry", "kiwifruit", "mulberry", "strawberry",
     "blueberry", "blackberry", "starfruit"
   };
                                                              Down
   char *a;
                                                              puts(juices[2]);
puts(juices[6]);
                                                               print_reverse(juices[9]);
print_reverse(juices[7]);
   a = juices[2];
                                                                  juices[1] = juices[3];
                                                                  puts(juices[10]);
   juices[2] = juices[8];
                                                                  print_reverse(juices[1]);
   juices[8] = a;
3 puts(juices[8]);
                                                                  return 0;
4 print_reverse(juices[(18 + 7) / 5]);
                                                                                       99
                                                                       you are here ▶
```


www.it-ebooks.info

crossword solved



C-Cross Solution

Now that the guys have the print_reverse() function working, they've used it to create a crossword. The answers are displayed by the output lines in the code.

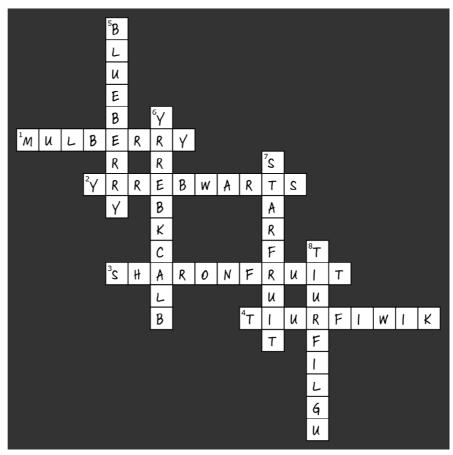

Across

```
int main()
 {
   char *juices[] = {
     "dragonfruit", "waterberry", "sharonfruit", "uglifruit",
     "rumberry", "kiwifruit", "mulberry", "strawberry",
     "blueberry", "blackberry", "starfruit"
   };
                                                               Down
   char *a;
                                                                puts(juices[2]);
nputs(juices[6]);
                                                                print_reverse(juices[9]);
print_reverse(juices[7]);
                                                                   juices[1] = juices[3];
   a = juices[2];
   juices[2] = juices[8];
                                                                   puts(juices[10]);
                                                                   print_reverse(juices[1]);
   juices[8] = a;
                                                                   return 0;
3 puts(juices[8]);
\bigcirc print reverse(juices[(18 + 7) / 5]);
100
      Chapter 2.5
```

www.it-ebooks.info

Your C Toolbox

You've got Chapter 2.5 under your belt, and now you've added strings to your toolbox.

For a complete list of tooltips in the book, see Appendix ii.

The string.h header contains useful string functions.

strstr(a, b)
will return the
address of
string b in string
a.

strcpy()
copies one
string to
another.

An array of strings is an array of arrays.

You create an array of arrays using char strings [...][...]

stremp()
compares
two strings.

streat()
concatenates
two strings.

strchr() finds the location of a character inside a string.

strlen()
finds the
length of a
string.




3 creating small tools



* Do one thing thing * * and do it well *



It's all about picking the right tool for the right job...

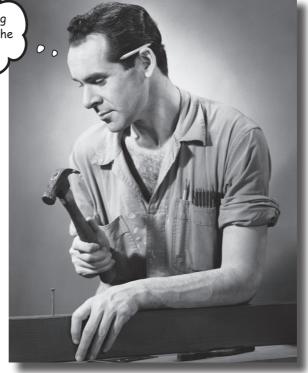

Every operating system includes small tools.

Small tools written in C perform specialized small tasks, such as reading and writing files, or filtering data. If you want to perform more complex tasks, you can even link several tools together. But how are these small tools built? In this chapter, you'll look at the building blocks of creating small tools. You'll learn how to control command-line options, how to manage streams of information, and redirection, getting tooled up in no time.

Small tools can solve big problems

A **small tool** is a C program that does *one* task and *does it well*. It might display the contents of a file on the screen or list the processes running on the computer. Or it might display the first 10 lines of a file or send it to the printer. Most operating systems come with a whole set of small tools that you can run from the command prompt or the terminal. Sometimes, when you have a big problem to solve, you can break it down into a series of small operating systems like Linux are mostly made problems, and then write small tools for each of them.

A small tool does one task and does it well.

up of hundreds and hundreds of small tools.

Someone's written me a map web application, and I'd love to publish my route data with it. Trouble is, the format of the data coming from my GPS is wrong.

This is the data from the cyclist's GPS. It's a comma-separated format.

This is a latitude.

42.363400, -71.098465, Speed = 2142.363327, -71.097588, Speed = 2342.363255, -71.096710, Speed = 17

This is the data format the map needs. It's in JavaScript Object Notation, or JSON.

The data's the same, but the format's a little different

```
data=[
{latitude: 42.363400, longitude: -71.098465, info: 'Speed = 21'},
{latitude: 42.363327, longitude: -71.097588, info: 'Speed = 23'},
{latitude: 42.363255, longitude: -71.096710, info: 'Speed = 17'},
```

If one small part of your program needs to convert data from one format to another, that's the perfect kind of task for a small tool.



Hey, who hasn't taken a code printout on a long ride only to find that it soon becomes... unreadable? Sure, we all have. But with a little thought, you should be able to piece together the original version of some code.

Pocket Cope

This program can read comma-separated data from the command line and then display it in JSON format. See if you can figure out what the missing code is.

```
#include <stdio.h>
int main()
  float latitude;
  float longitude;
                                                                                             The scanf()
                                                                                             function returns
  char info[80];
  int started = .....;

What will these values the number: scanf() to enter puts ("data=[");

while (scanf("%f, %f, %79[^\n]", ......) == 3) {
                                                                                             the number of
                                                                                             values it was able
                                                                                             to read.
                                   This is just a way of saying, "Give me every character up to the end of the line."
     if (started)
       printf(",\n");
       started = .....; & Be careful how you set "started."
     printf("{latitude: %f, longitude: %f, info: '%s'}", .........., .........);
                                                                       What values need to be displayed?
  puts("\n]");
   return 0;
```



Hey, who hasn't taken a code printout on a long ride only to find that it soon becomes... unreadable? Sure, we all have. But with a little thought, you should have been able to piece together the original version of some code.

Pocket Cope Solution

This program can read comma-separated data from the command line and then display it in JSON format. You were to figure out what the missing code is.

```
#include <stdio.h>
int main()
  float latitude;
  char info[80]; We need to begin with "started" set to O, which means false.
  int started = ....;
                                      puts("data=[");
  while (scanf("%f,%f,%f,%79[^\n]", | flatitude , | flongitude , | info | == 3) {
      F (started) You'll display a comma only if you've printf(",\n"); already displayed a previous line.
      printf("{latitude: %f, longitude: %f, info: '%s'}", latitude , longitude , info );
                                                              You don't need & here because
  puts("\n]");
                                                              printf() is using the values, not
  return 0;
                                                              the addresses of the numbers.
```



So what happens when you compile and run this code? What will it do?

This is the data that's printed out.

This is the data you type in.

The input and the output are mixed up.

The input are mixed up.

The input and the output are mixed up.

The input are mixed up.

The input are mixed up.

The input are mixed up

Several more hours' worth of typing ...


The program lets you enter GPS data at the keyboard and then it displays the JSON-formatted data on the screen. Problem is, the *input* and the *output* are all *mixed up together*. Also, there's a **lot of data**. If you are writing a small tool, you don't want to type in the data; you want to get large amounts of data by reading a **file**.

Also, how is the JSON data going to be used? Surely it can't be much use on the *screen*?


So is the program running OK? Is it doing the right thing? **Do you need to change the code?**

press Ctrl-D just to stop the program.

In the end, you need to

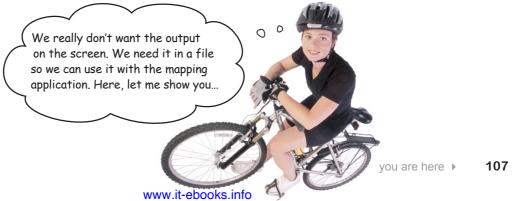


Here's how the program should work

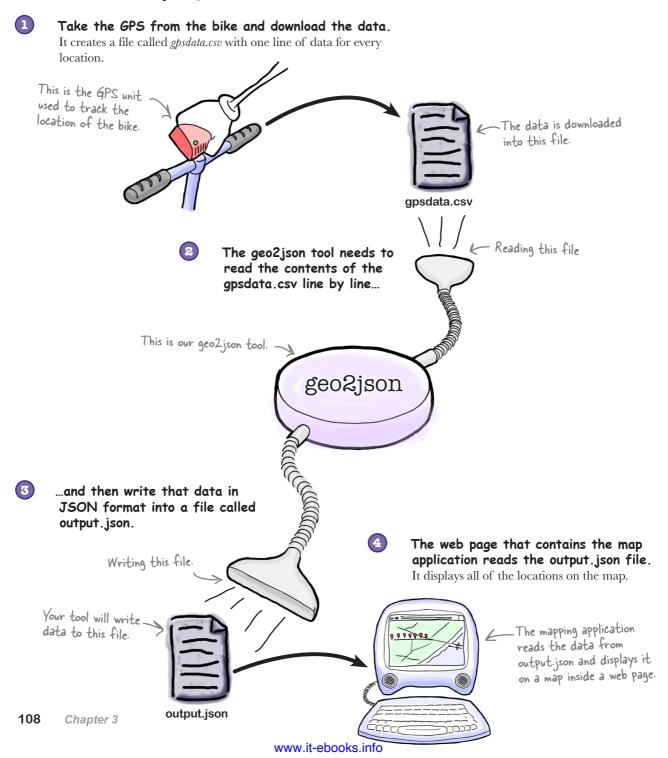

But you're not using files...

The problem is, instead of reading and writing files, your program is currently reading data from the *keyboard* and writing it to the *display*.

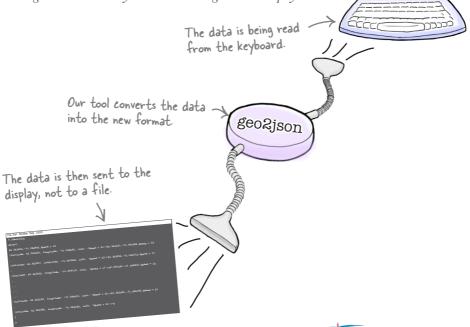

But that isn't good enough. The user won't want to type in all of the data if it's already stored in a file somewhere. And if the data in JSON format is just displayed on the screen, there's no way the map within the web page will be able to read it.

You need to make the program work with **files**. But how do you do that? If you want to use *files* instead of the keyboard and the display, what code will you have to change? Will you have to change any code at all?



Is there a way of making our program use files without changing code? Without even *recompiling* it?



Geek Bits

Tools that read data line by line, process it, and write it out again are called **filters**. If you have a Unix machine, or you've installed Cygwin on Windows, you already have a few filter tools installed.

head: This tool displays the first few lines of a file.


tail: This filter displays the lines at the end of a file.

sed: The *stream editor* lets you do things like search and replace text.

You'll see later how to combine filters together to form **filter chains**.

You can use redirection

You're using scanf() and printf() to read from the keyboard and write to the display. But the truth is, they don't talk *directly* to the keyboard and display. Instead, they use the **Standard Input and Standard Output**. The *Standard Input* and *Standard Output* are created by the operating system when the program runs.

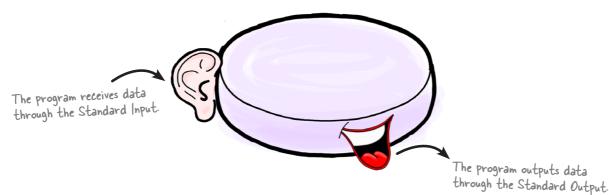

The operating system controls how data gets into and out of the Standard Input and Output. If you run a program from the command prompt or terminal, the operating system will send all of the keystrokes from the keyboard into the Standard Input. If the operating system reads any data from the Standard Output, by default it will send that data to the display.

The scanf() and printf() functions don't know, or care, where the data comes from or goes to. They just read and write Standard Input and the Standard Output.

Now this might sound like it's kind of complicated. After all, why not just have your program talk directly to the keyboard and screen? Wouldn't that be simpler?

Well, there's a very good reason why operating systems communicate with programs using the Standard Input and the Standard Output:


You can redirect the Standard Input and Standard Output so that they read and write data somewhere else, such as to and from files.

You can redirect the Standard Input with <...

Instead of entering data at the keyboard, you can use the < operator to read the data from a file.

```
42.363400, -71.098465, Speed = 21
                                                           This is the file containing the
 42.363327, -71.097588, Speed = 23
                                                           data from the GPS device.
 42.363255, -71.096710, Speed = 17
 42.363182, -71.095833, Speed = 22
 42.363110, -71.094955, Speed = 14
 42.363037, -71.094078, Speed = 16
 42.362965, -71.093201, Speed = 18
 42.362892, -71.092323, Speed = 22
 42.362820, -71.091446, Speed = 17
 42.362747, -71.090569, Speed = 23
 42.362675, -71.089691, Speed = 14
                                                                  This is telling the operating
 42.362602, -71.088814, Speed = 19
                                                                                                       You don't have to type in the
                                                                  system to send the data from
 42.362530, -71.087936, Speed = 16
                                                                                                       GPS data, so you don't see it
                                                                  the file into the Standard
 42.362457, -71.087059, Speed = 16
                                                                                                       mixed up with the output.
                                                                  Input of the program.
 42.362385,-71.086182,Speed = 21
                              File Edit Window Help Dor
                                 ./geo2json < gpsdata.csv
                               data=[
                               {latitude: 42.363400, longitude: -71.098465, info: {latitude: 42.363327, longitude: -71.097588, info: {latitude: 42.363255, longitude: -71.096710, info:
                                                                                                            'Speed = 21'},
                                                                                                            'Speed =
                               {latitude: 42.363283, longitude: -71.096710, lnlo: {latitude: 42.363182, longitude: -71.095833, info: {latitude: 42.363110, longitude: -71.094955, info: {latitude: 42.363037, longitude: -71.094078, info:
                                                                                                            'Speed = 22'},
Now you just see the
                                                                                                            'Speed =
                                                                                                                         14 1 3
JSON data coming
from the program.
                               {latitude: 42.362385, longitude: -71.086182, info: 'Speed = 21'}
```


The < operator tells the operating system that the Standard Input of the program should be connected to the *gpsdata.csv* file instead of the keyboard. So you can send the program data from a file. Now you just need to redirect its **output**.

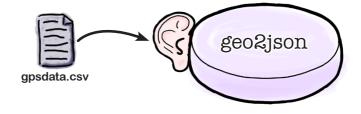

you are here ▶


...and redirect the Standard Output with >

To redirect the Standard Output to a file, you need to use the > operator:

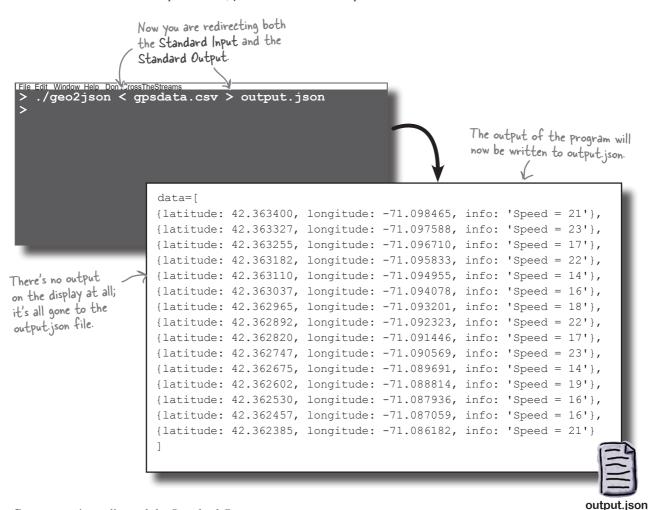


Because you've redirected the Standard Output, you don't see any data appearing on the screen at all. But the program has now created a file called *output.json*.


The *output json* file is the one you needed to create for the mapping application. Let's see if it works.

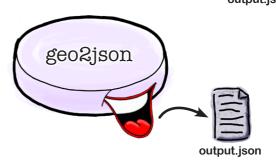




Now it's time to see if the new data file you've created can be used to plot the location data on a map. You'll take a copy of the web page containing the mapping program and put it into the same folder as the *output.json* file. Then you need to open the web page in a browser:

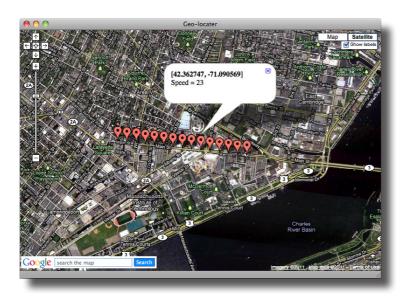



Download the web page from http://oreillyhfc.appspot.com/map.html.

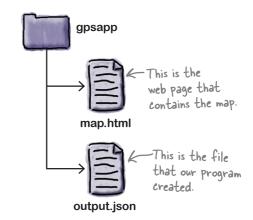

The map works.

The map inside the web page is able to read the data from the output file.



But there's a problem with some of the data...

Your program seems to be able to read GPS data and format it correctly for the mapping application. But after a few days, a problem creeps in.



But the geo2json program doesn't do any checking of the data it reads; it just reformats the numbers and sends them to the output.

That should be easy to fix. You need to validate the data.

114 Chapter 3



You need to add some code to the geo2json program that will check for bad latitude and longitude values. You don't need anything fancy. If a latitude or longitude falls outside the expected numeric, just display an error message and exit the program with an error status of 2:

```
#include <stdio.h>
int main()
 float latitude;
 float longitude;
  char info[80];
  int started = 0;
 puts("data=[");
 while (scanf("%f,%f,%79[^\n]", &latitude, &longitude, info) == 3) {
   if (started)
     printf(",\n");
                                                If the latitude is < -90 or > 90, then error
   else
                                              with status 2. If the longitude is < -180 or > 180, then error with status 2.
     started = 1;
.....
.....
   printf("{latitude: %f, longitude: %f, info: '%s'}", latitude, longitude, info);
 puts("\n]");
  return 0;
```



You needed to add some code to the <code>geo2json</code> program to check for bad latitude and longitude values. If a latitude or longitude falls outside the expected numeric, just display an error message and exit the program with an error status of 2:

```
#include <stdio.h>
int main()
 float latitude;
  float longitude;
  char info[80];
  int started = 0;
 puts("data=[");
  while (scanf("%f,%f,%79[^\n]", &latitude, &longitude, info) == 3) {
   if (started)
     printf(",\n");
   else
      started = 1;
                                                   These lines check that the
if ((latitude < -90.0) || (latitude > 90.0)) {
                                                  latitude and longitude are
                                                  in the correct range.
printf("Invalid latitude: %f\n", latitude);
   > return 2;
                                                   These lines display
   if ((longitude < -180.0) || (longitude > 180.0)) {
                                                   simple error messages.
     printf("Invalid longitude: %f\n", longitude);
......
   printf("{latitude: %f, longitude: %f, info: '%s'}", latitude, longitude, info);
 puts("\n]");
  return 0;
```

These

exit

from the

main()

function with an


error status of 2.

lines will



OK, so you now have the code in place to check that the latitude and longitude are in range. But will it be enough to make our program cope with bad data? Let's see.

Compile the code and then run the bad data through the program:

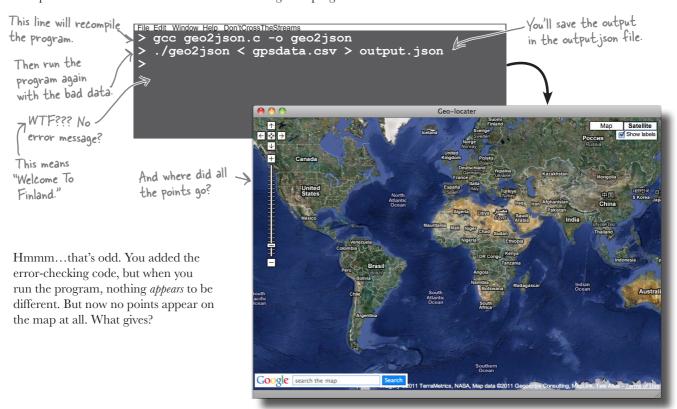



Study the code. What do **you** think happened? Is the code doing what you asked it to? Why weren't there any error messages? Why did the mapping program think that the entire *output.json* file was corrupt?

CODE DECONSTRUCTION

The mapping program is complaining about the *output.json* file, so let's open it up and see what's inside:

This is the output.json file.

```
data=[
{latitude: 42.363400, longitude: -71.098465, info: 'Speed = 21'},
{latitude: 42.363327, longitude: -71.097588, info: 'Speed = 23'},
{latitude: 42.363255, longitude: -71.096710, info: 'Speed = 17'},
Invalid latitude: 423.631805
```



Once you open the file, you can see *exactly* what happened. The program saw that there was a problem with some of the data, and it exited right away. It didn't process any more data and it *did* output an error message. Problem is, because you were **redirecting the Standard Output** into the *output.json*, that meant you were also redirecting the error message. So the program ended silently, and you never saw what the problem was.

Now, you *could* have checked the exit status of the program, but you really want to be able to see the error messages.

But how can you still display error messages if you are redirecting the output?



Geek Bits

If your program finds a problem in the data, it exits with a status of 2. But how can you check that error status after the program has finished? Well, it depends on what operating system you're using. If you're running on a Mac, Linux, some other kind of Unix machine, or if you're using Cygwin on a Windows machine, you can display the error status like this:

```
File Edit Window Help
$ echo $?
2
```

If you're using the Command Prompt in Windows, then it's a little different:

```
File Edit Window Help
C:\> echo %ERRORLEVEL%
2
```

Both commands do the same thing: they display the number returned by the program when it finished.



Wouldn't it be dreamy if there were a special output for errors so that I didn't have to mix my errors in with Standard Output? But I know it's just a fantasy...




Introducing the Standard Error


The **Standard Output** is the *default* way of outputting data from a program. But what if something *exceptional* happens, like an error? You'll probably want to deal with things like error messages a little differently from the usual output.

That's why the **Standard Error** was invented. The Standard Error is a *second output* that was created for sending error messages.

Human beings generally have two ears and one mouth, but processes are wired a little differently. Every process has **one ear** (the Standard Input) and **two mouths** (the Standard Output and the Standard Error).

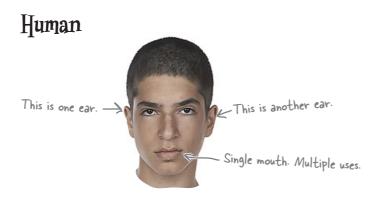

Process

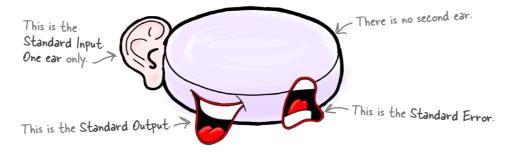


Let's see how the operating system sets these up.

120 Chapter 3


By default, the Standard Error is sent to the display

Remember how when a new process is created, the operating system points the Standard Input at the keyboard and the Standard Output at the screen? Well, the operating system creates the Standard Error at the same time and, like the Standard Output, the Standard Error is sent to the display by default.

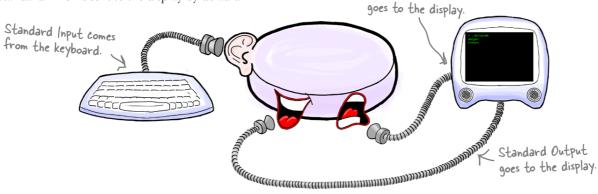

Standard Error

That means that if someone redirects the Standard Input and Standard Output so they use files, the Standard Error will continue to send data to the display.

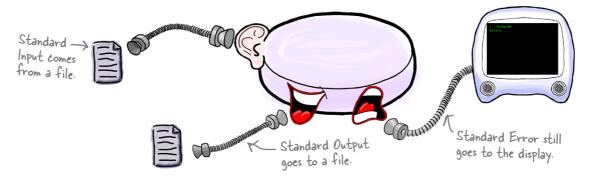


And that's really cool, because it means that even if the Standard Output is redirected somewhere else, by default, **any messages sent down the Standard Error will still be visible on the screen**.

So you can fix the problem of our hidden error messages by simply displaying them on the Standard Error.

But how do you do that?

fprintf() prints to a data stream

You've already seen that the printf() function sends data to the Standard Output. What you *didn't* know is that the printf() function is just a version of a more general function called fprintf():

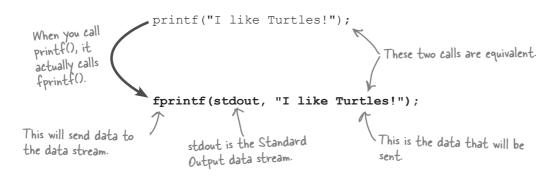

The fprintf() function allows you to choose where you want to send text to. You can tell fprintf() to send text to **stdout** (the Standard Output) or **stderr** (the Standard Error).

bumb Questions

There's a stdout and a stderr. Is there a stdin?

A: Yes, and as you probably guessed, it refers to the Standard

Q: Can I print to it?

A: No, the Standard Input can't be printed to

Q: Can I read from it?

A: Yes, by using fscanf(), which is just like scanf(), but you can specify the data stream.

So is fscanf(stdin, ...) exactly the same as scanf(...)?

A: Yes, they're identical. In fact, behind the scenes, scanf(...) just calls fscanf(stdin, ...).

Q: Can I redirect the Standard Error?

A: Yes; > redirects the Standard Output. But 2> redirects the Standard Error

Q: Solcould write geo2json 2> errors.txt?

A: Yes

Let's update the code to use fprintf()

With just a couple of small changes, you can get our error messages printing on the Standard Error.

```
#include <stdio.h>
int main()
        float latitude;
        float longitude;
        char info[80];
        int started = 0;
       puts("data=[");
       while (scanf("%f,%f,%79[^\n]", &latitude, &longitude, info) == 3) {
               if (started)
                      printf(",\n");
                       started = 1;
                if ((latitude < -90.0) || (latitude > 90.0)) {
                     printy modichlativade .. Styl latitude).
                      fprintf(stderr, "Invalid latitude: f^n, latitude);
                                                                                                                                                                                                                                               \ Instead of printf(),
                       return 2;
                                                                                                                                                                                                                                                    we use fprintf().
               if ((longitude < -180.0) || (longitude > 180.0)) {
                     printing the manifest of the longitude o
                      fprintf(stderr, "Invalid longitude: %f\n", longitude);
                                                                      We need to specify stderr as the first parameter.
                       return 2;
                printf("{latitude: %f, longitude: %f, info: '%s'}", latitude, longitude, info);
        puts("\n]");
        return 0;
```

That means that the code should now work in exactly the same way, *except* the error messages should appear on the Standard Error instead of the Standard Output.

Let's run the code and see.



If you recompile the program and then run the corrupted GPS data through it again, this happens.

```
File Edit Window Help ControlErrors

> gcc geo2json.c -o geo2json

> ./geo2json-page21 < gpsdata.csv > output.json
Invalid latitude: 423.631805
```

That's excellent. This time, even though you are redirecting the Standard Output into the *output.json* file, the error message is still visible on the screen.

The Standard Error was created with exactly this in mind: to separate the error messages from the usual output. But remember: stderr and stdout are both just output streams. And there's nothing to prevent you from using them for anything.

Let's try out your newfound Standard Input and Standard Error skills.



BULLET POINTS

- The printf() function sends data to the Standard Output.
- The Standard Output goes to the display by default.
- You can redirect the Standard Output to a file by using > on the command line.
- scanf() reads data from the Standard Input.
- The Standard Input reads data from the keyboard by default.
- You can redirect the Standard Input to read a file by using < on the command line.
- The Standard Error is reserved for outputting error messages.
- You can redirect the Standard Error using

TOP SECRET

We have reason to believe that the following program has been used in the transmission of secret messages:

```
#include <stdio.h>
                 int main()
                   char word[10];
                    int i = 0;
                   while (scanf("%9s", word) == 1) {
                     i = i + 1;
i % 2 means "The .

> if (i % 2)
remainder left when
you divide by 2."
                       fprintf(stdout, "%s\n", word);
                        fprintf(stderr, "%s\n", word);
                    }
                    return 0;
```

We have intercepted a file called *secret.txt* and a scrap of paper with instructions:

Run with:

THE BUY SUBMARINE SIX WILL EGGS SURFACE AND AT SOME NINE MILK PM

> will redirect the Standard Output.

2> will redirect the Standard Error.

secret_messages < secret.txt > message1.txt 2> message2.txt

secret.txt

Your mission is to decode the two secret messages. Write your answers below.		
Message 1	Message 2	

TOP SECRET — SOLVED

We have reason to believe that the following program has been used in the transmission of secret messages:

```
#include <stdio.h>
int main()
{
   char word[10];
   int i = 0;
   while (scanf("%9s", word) == 1) {
      i = i + 1;
      if (i % 2)
          fprintf(stdout, "%s\n", word);
      else
          fprintf(stderr, "%s\n", word);
   }
   return 0;
}
```

We have intercepted a file called *secret.txt* and a scrap of paper with instructions:

THE BUY SUBMARINE
SIX WILL EGGS
SURFACE AND AT
SOME NINE MILK PM

secret.txt

Run with: secret_messages < secret.txt > message1.txt 2> message2.txt

.....

Your mission was to decode the two secret messages.	
Message 1	Message 2
THE	Buy
SUBMARINE	ΧI2
WILL	E66 S
SURFACE	AND
AT	SOME
NINE	MILK

PM



Head First: Operating System, we're so pleased you've found time for us today.

O/S: Time sharing: it's what I'm good at.

Head First: Now you've agreed to appear under conditions of anonymity, is that right?

O/S: Don't Ask/Don't Tell. Just call me O/S.

Head First: Does it matter what kind of O/S you are?

O/S: A lot of people get pretty heated over which operating system to use. But for simple C programs, we all behave pretty much the same way.

Head First: Because of the C Standard Library?

O/S: Yeah, if you're writing C, then the basics are the same everywhere. Like I always say, we're all the same with the lights out. Know what I'm saying?

Head First: Oh, of course. Now, you are in charge of loading programs into memory?

O/S: I turn them into processes, that's right.

Head First: Important job?

O/S: I like to think so. You can't just throw a program into memory and let it struggle, you know? There's a whole bunch of setup. I need to allocate memory for the programs and connect them to their standard data streams so they can use things like displays and keyboards.

Head First: Like you just did for the geo2json program?

O/S: That guy's a real tool.

Head First: Oh, I'm sorry.

O/S: No, I mean he's a real tool: a simple, text-based program.

Head First: Ah, I see. And do you deal with a lot of tools?

O/S: Ain't that life? It depends on the operating system. Unix-style systems use a lot of tools to get the work done. Windows uses them less, but they're still important.

Head First: Creating small tools that work together is almost a philosophy, isn't it?

O/S: It's a way of life. Sometimes when you've got a big problem to solve, it can be easier to break it down into a set of simpler tasks.

Head First: Then write a tool for each task?

O/S: Exactly. Then use the operating system—that's me—to connect the tools together.

Head First: Are there any advantages to that approach?

O/S: The big one is simplicity. If you have a set of small programs, they are easier to test. The other thing is that once you've built a tool, you can use it in other projects.

Head First: Any downsides?

O/S: Well, tools don't look that great. They work on the command line usually, so they don't have a lot of what you might call Eye Appeal.

Head First: Does that matter?


O/S: Not as much as you'd think. As long as you have a set of solid tools to do the important work, you can always connect them to a nice interface, whether it's a desktop application or a website. But, hey, look at the time. Sorry, I've got to preempt you.

Head First: Oh, well, thank you, O/S; it's been a pleas...zzzzzz...

Small tools are flexible

One of the great things about small tools is their flexibility. If you write a program that does one thing really well, chances are you will be able to use it in lots of contexts. If you create a program that can search for text inside a file, say, then chances are you going to find that program useful in more than one place.

For example, think about your geo2json tool. You created it to help display cycling data, right? But there's no reason you can't use it for some other purpose...like investigating...the...

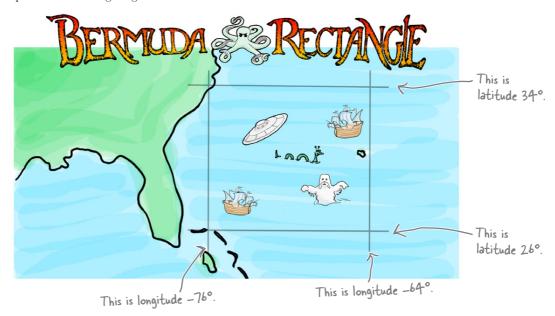

To see how flexible our tool is, let's use it for a completely different problem. Instead of just displaying data on a map, let's try to use it for something a little more complex. Say you want to read in a whole set of GPS data like before, but instead of just displaying everything, let's just display the information that falls inside the Bermuda Rectangle.

That means you will display only data that matches these conditions:

```
((latitude > 26) && (latitude < 34))  ((longitude > -76) && (longitude < -64))
```

So where do you need to begin?

128 Chapter 3

Pon't change the geoZjson tool

Our geo2json tool displays all of the data it's given. So what should we do? Should we *modify* geo2json so that it *exports* data and also *checks* the data?

Well, we *could*, but remember, a small tool:

does one job and does it well

You don't really want to modify the geo2json tool, because you want it to do just one task. If you make the program do something more complex, you'll cause problems for your users who expect the tool to keep working in exactly the same way.





-Tips for Designing Small Tools

Small tools like geo2json all follow these design principles:


- * They can read data from the Standard Input.
- * They can display data on the Standard Output.
- * They deal with *text* data rather than obscure binary formats.
- * They each perform one simple task.

A different task needs a different tool


If you want to skip over the data that falls outside the Bermuda Rectangle, you should build a separate tool that does just that.

So, you'll have **two** tools: a new **bermuda** tool that filters out data that is outside the Bermuda Rectangle, and then your original geo2json tool that will convert the remaining data for the map.

This is how you'll connect the programs together:

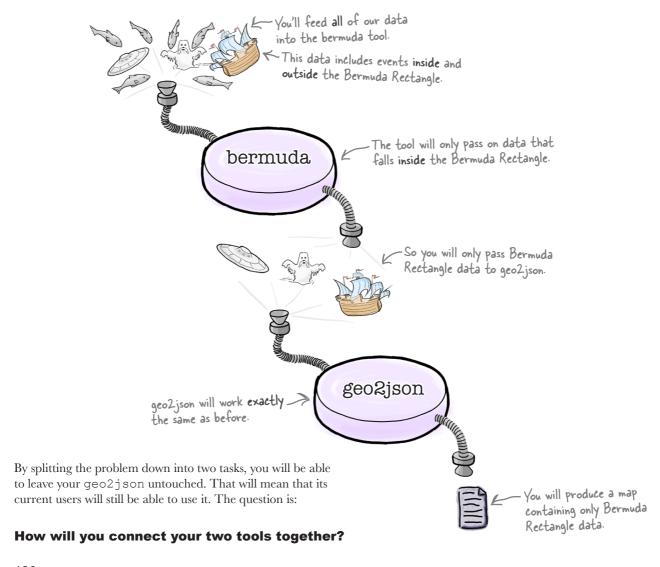

Connect your input and output with a pipe

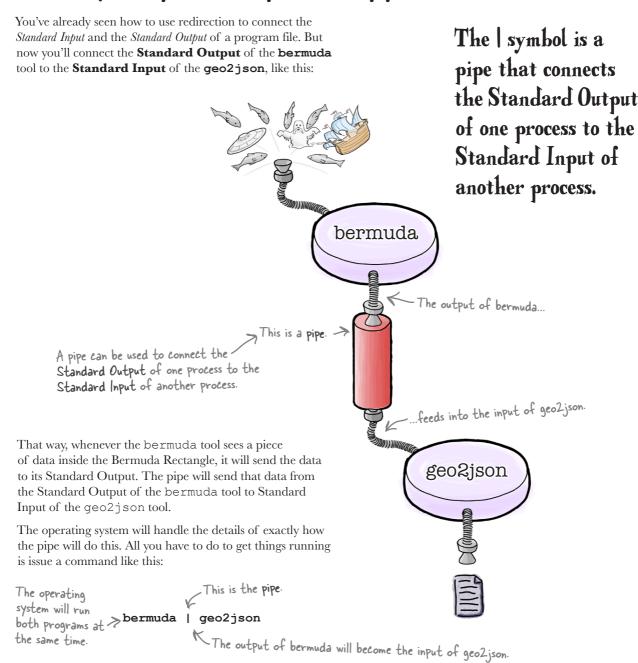


So now it's time to build the bermuda tool.

The bermuda tool

The bermuda tool will work in a very similar way to the geo2json tool: it will read through a set of GPS data, line by line, and then send data to the Standard Output.

But there will be two big differences. First, it won't send *every* piece of data to the Standard Output, just the lines that are inside the Bermuda Rectangle. The second difference is that the bermuda tool will always output data in the same CSV format used to store GPS data.


This is what the pseudocode for the tool looks like:

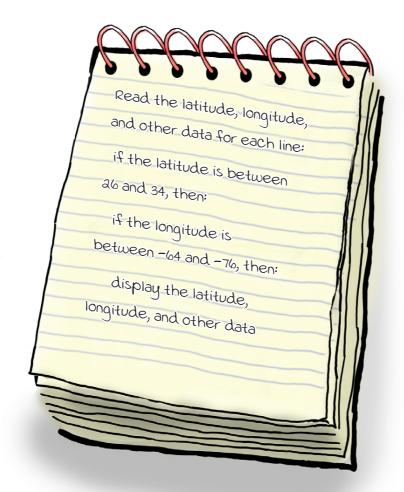

Let's turn the pseudocode into C.


Pool Puzzle

Your **goal** is to complete the code for the bermuda program. Take code snippets from the pool and place them into the blank lines below. You won't need to use all the snippets of code in the pool.

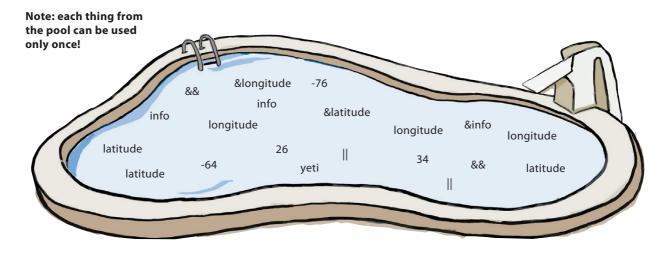

Pool Puzzle Solution


Your **goal** was to complete the code for the bermuda program by taking code snippets from the pool and placing them into the blank lines below.

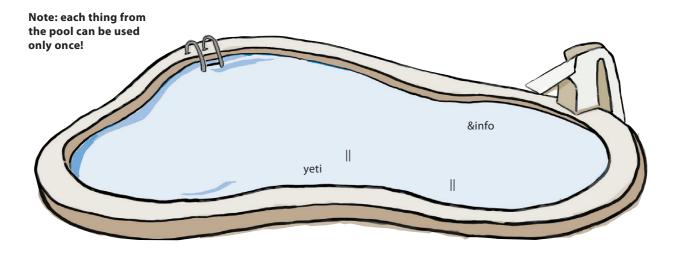





Now that you've completed the bermuda tool, it's time to use it with the geo2json tool and see if you can map any weird occurrences inside the Bermuda Rectangle.

Once you've compiled both of the tools, you can fire up a console and then run the two programs together like this:

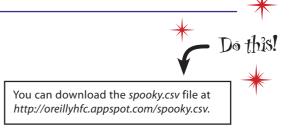

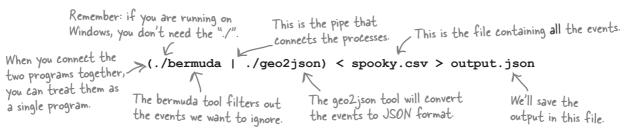

By connecting the two programs together with a pipe, you can treat these two separate programs as if they were a single program, so you can redirect the Standard Input and Standard Output like you did before.

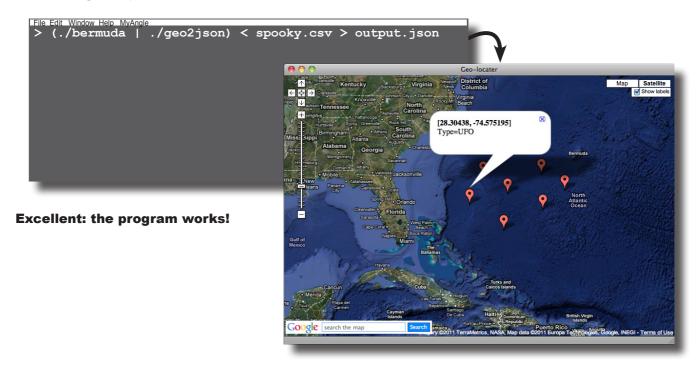

you are here ▶ 135

there are no **Dumb Questions**

Why is it important that small tools use the Standard Input and Standard Output?

A: Because it makes it easier to connect tools together with pipes.

Q: Why does that matter?

A: Small tools usually don't solve an entire problem on their own, just a small technical problem, like converting data from one format to another. But if you can combine them together, then you can solve large problems.

Q: What is a pipe, actually?

The exact details depend on the operating system. Pipes might be made from sections of memory or temporary files. The important thing is that they accept data in one end, and send the data out of the other in sequence.

So if two programs are piped together, does the first program have to finish running before the second program can start?

A: No. Both of the programs will run at the same time; as output is produced by the first program, it can be consumed by the second program.

Why do small tools use text?

A: It's the most open format. If a small tool uses text, it means that any other programmer can easily read and understand the output just by using a text editor. Binary formats are normally obscure and hard to understand.

Can I connect several programs together with pipes?

A: Yes, just add more | between each program name. A series of connected processes is called a *pipeline*.

If several processes are connected together with pipes and then I use > and < to redirect the Standard Input and Output, which processes will have their input and output redirected?

A: The < will send a file's contents to the first process in the pipeline. The > will capture the Standard Output from the last process in the pipeline.

Are the parentheses really necessary when I run the bermuda program with geo2json?

A: Yes. The parentheses will make sure the data file is read by the Standard Input of the bermuda program.




BULLET POINTS

- If you want to perform a different task, consider writing a separate small tool.
- Design tools to work with Standard Input and Standard Output.
- Small tools normally read and write text data.
- You can connect the Standard Output of one process to the Standard Input of another process using a pipe.

But what if you want to output to more than one file?

We've looked at how to read data from one file and write to another file using redirection, but what if the program needs to do something a little more complex, like send data to **more than one file?**

Imagine you need to create another tool that will read a set of data from a file, and then split it into other files.

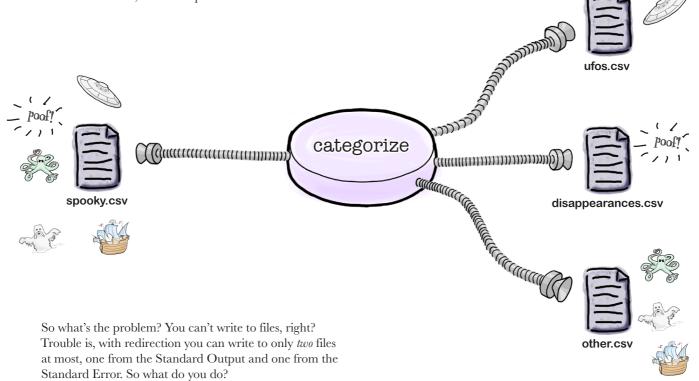

Roll your own data streams

When a program runs, the operating system gives it three file data streams: the Standard Input, the Standard Output, and the Standard Error. But sometimes you need to create other data streams on the fly.

The good news is that the operating system doesn't limit you to the ones you are dealt when the program starts. You can roll your own as the program runs.

Each data stream is represented by a pointer to a file, and you can create a new data stream using the **fopen()** function:



```
This will create a data stream to read from a file. FILE *in_file = fopen("input.txt", "r");

This is the name of the file.

This is the mode: "r" means "read."

This is the mode: "r" means "read."

This is the mode: "r" means "read."

This is the mode: "w" means "write."

Adata stream to write to a file.
```

The fopen () function takes **two** parameters: a *filename* and a *mode*. The mode can be **w** to write to a file, **r** to read from a file, or **a** to append data to the *end* of a file.

Once you've created a data stream, you can print to it using **fprintf()**, just like before. But what if you need to read from a file? Well, there's also an **fscanf()** function to help you do that too:

```
The mode is:

"w" = write,

"r" = read, or

"a" = append.
```

```
fprintf(out_file, "Don't wear %s with %s", "red", "green");
fscanf(in_file, "%79[^\n]\n", sentence);
```

Finally, when you're finished with a data stream, you need to *close it*. The truth is that all data streams are automatically closed when the program ends, but it's still a good idea to always close the data stream yourself:

```
fclose(in_file);
fclose(out file);
```

Let's try this out now.

138 Chapter 3

Sharpen your pencil

This is the code for a program to read all of the data from a GPS file and then write the data into one of three other files. See if you can fill in the blanks.

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
int main()
  char line[80];
 FILE *in = fopen("spooky.csv", );
 FILE *file1 = fopen("ufos.csv", .....);
 FILE *file2 = fopen("disappearances.csv", _____);
 FILE *file3 = fopen("others.csv", .....);
  while ( (in, "%79[^n] n", line) == 1) {
   if (strstr(line, "UFO"))
     .....(file1, "%s\n", line);
   else if (strstr(line, "Disappearance"))
     .....(file2, "%s\n", line);
   else
     .....(file3, "%s\n", line);
   (file1);
  (file2);
  (file3);
  return 0;
```

there are no **Dumb Questions**

How many data streams can I have?

A: It depends on the operating system, but usually a process can have up to 256. The key thing is there's a limited number of them, so make sure you close them when you're done using them.

Why is FILE in uppercase?

A: It's historic. FILE used to be defined using a macro. Macros are usually given uppercase names. You'll hear about macros later on.

Sharpen your pencil Solution

This is the code for a program to read all of the data from a GPS file and then write the data into one of three other files. You were to fill in the blanks.

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
int main()
 char line[80];
 if (strstr(line, "UFO"))
     fprintf (file1, "%s\n", line);
   else if (strstr(line, "Disappearance"))
     fprintf (file2, "%s\n", line);
     fprintf (file3, "%s\n", line);
    fclose...(file1);
    fclose (file2);
  fclose (file3);
 return 0;
}
```


The program runs, but...

If you compile and run the program with:

gcc categorize.c -o categorize && ./categorize

the program will read the *spooky.csv* file and split up the data, line by line, into three other files—*ufos.csv*, *disappearances.csv*, and *other.csv*.

That's great, but what if a user wanted to split up the data differently? What if he wanted to search for different words or write to different files? Could he do that without needing to recompile the program each time?



There's more to main()

The thing is, any program you write will need to give the user the ability to change the way it works. If it's a GUI program, you will probably need to give it preferences. And if it's a command-line program, like our categorize tool, it will need to give the user the ability to pass it **command-line arguments**:

```
This is the first word to filter for. All of the mermaid data will be stored in this file.

./categorize mermaid mermaid.csv Elvis elvises.csv the rest.csv else goes into this file.

But how do you read command-line arguments from within the program? So far every time you've created a main () function, you've will be stored here.
```

But how do you read command-line arguments from **within the program**? So far, every time you've created a **main()** function, you've written it without any arguments. But the truth is, there are actually *two* forms of the main() function we can use. This is the second version:

```
int main(int argc, char *argv[])
{
    .... Do stuff....
}
```

The main () function can read the command-line arguments as an **array of strings**. Actually, of course, because C doesn't really have strings built-in, it reads them as *an array of character pointers to strings*. Like this:

```
"./categorize" "mermaid" "mermaid.csv" "Elvis" "elvises.csv" "the_rest.csv"

This is argv[0]. This is argv[1]. This is argv[2]. This is argv[3]. This is argv[4]. This is argv[5].

The first argument is actually the name of the program being run.
```

Like any array in C, you need some way of knowing how long the array is. That's why the main () function has two parameters. The argc value is a count of the number of elements in the array.

Command-line arguments really give your program a lot more flexibility, and it's worth thinking about which things you want your users to *tweak* at runtime. It will make your program a lot more valuable to them.

OK, let's see how you can add a little flexibility to the categorize program.



The first argument contains the name of the program as it was run by the user.

That means that the first **proper** command-line argument is argv[1].

you are here >



Code Magnets

This is a modified version of the <code>categorize</code> program that can read the keywords to search for and the files to use from the command line. See if you can fit the correct magnets into the correct slots.

The program runs using:

./categorize mermaid mermaid.csv Elvis elvises.csv the_rest.csv

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

int main(int argc, char *argv[])
{
   char line[80];

   if (____!=____) {
      fprintf(stderr, "You need to give 5 arguments\n");
      return 1;
   }
   FILE *in = fopen("spooky.csv", "r");


   FILE *file1 = fopen(_____, "w");

   FILE *file2 = fopen(_____, "w");

   FILE *file3 = fopen(_____, "w");
```

```
while (fscanf(in, "%79[^\n]\n", line) == 1) {
    if (strstr(line, _______))
        fprintf(file1, "%s\n", line);

    else if (strstr(line, ______))
        fprintf(file2, "%s\n", line);
    else
        fprintf(file3, "%s\n", line);
}
fclose(file1);
fclose(file2);
fclose(file3);
return 0;
}
```

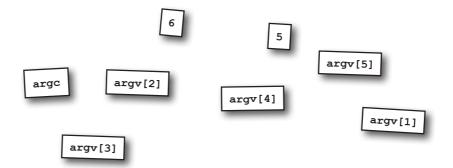



Code Magnets Solution

This is a modified version of the categorize program that can read the keywords to search for and the files to use from the command line. You were to fit the correct magnets into the correct slots.

The program runs using:

./categorize mermaid mermaid.csv Elvis elvises.csv the_rest.csv

```
while (fscanf(in, "%79[^\n]\n", line) == 1) {
   if (strstr(line, __argv[1]_))
     fprintf(file1, "%s\n", line);
   else if (strstr(line, __argv[3]_))
     fprintf(file2, "%s\n", line);
   else
     fprintf(file3, "%s\n", line);
}
fclose(file1);
fclose(file2);
fclose(file3);
return 0;
}
```

5



OK, let's try out the new version of the code. You'll need a test data file called *spooky.csv*.

```
30.685163,-68.137207, Type=Yeti
28.304380,-74.575195, Type=UFO
29.132971,-71.136475, Type=Ship
28.343065,-62.753906, Type=Elvis
27.868217,-68.005371, Type=Goatsucker
30.496017,-73.333740, Type=Disappearance
26.224447,-71.477051, Type=UFO
29.401320,-66.027832, Type=Ship
37.879536,-69.477539, Type=Elvis
22.705256,-68.192139, Type=Elvis
27.166695,-87.484131, Type=Elvis
```

Now you'll need to run the categorize program with a few commandline arguments saying what text to look for and what filenames to use:

```
File Edit Window Help ThankYouVeryMuch

> categorize UFO aliens.csv Elvis elvises.csv the_rest.csv
```

spooky.csv

When the program runs, the following files are produced:

```
28.304380,-74.575195,Type=UFO
26.224447,-71.477051,Type=UFO
```

aliens.csv

```
30.685163,-68.137207, Type=Yeti
29.132971,-71.136475, Type=Ship
27.868217,-68.005371, Type=Goatsucker
30.496017,-73.333740, Type=Disappearance
29.401320,-66.027832, Type=Ship
```

the_rest.csv

28.343065,-62.753906,Type=Elvis 37.879536,-69.477539,Type=Elvis 22.705256,-68.192139,Type=Elvis 27.166695,-87.484131,Type=Elvis geo2json, you can display it on a map.

If you run elvises.txt through



Elvis has left the building.



Safety Check

Although at Head First Labs we never make mistakes (cough), it's important in real-world programs to check for problems when you open a file for reading or writing. Fortunately, if there's a problem opening a data stream, the fopen() function will return the value 0. That means if you want to check for errors, you should change code like:

```
FILE *in = fopen("i_dont_exist.txt", "r");
to this:

FILE *in;
if (!(in = fopen("dont_exist.txt", "r"))) {
    fprintf(stderr, "Can't open the file.\n");
    return 1;
}
```

Overheard at the Head First Pizzeria



Chances are, any program you write is going to need options. If you create a chat program, it's going to need preferences. If you write a game, the user will want to change the shape of the blood spots. And if you're writing a command-line tool, you are probably going to need to add **command-line options**.

Command-line options are the little switches you often see with command-line tools:

tail -f logfile.out Display the end of the file, but wait for new data to be added to the end of the file.

Let the library do the work for you

Many programs use command-line options, so there's a special library function you can use to make dealing with them a little easier. It's called **getopt()**, and each time you call it, it returns the next option it finds on the command line.

Let's see how it works. Imagine you have a program that can take a set of different options:

Use four engines.

Awesomeness mode enabled.

rocket_to -e 4 -a Brasilia Tokyo London

This program needs one option that will take a value (-e = engines) and another that is simply on or off (-a = awesomeness). You can handle these options by calling getopt () in a loop like this:



The Polite Guide to Standards

The *unistd.h* header is not actually part of the standard C library. Instead, it gives your programs access to some of the POSIX libraries. POSIX was an attempt to create a common set of functions for use across all popular operating systems.

```
You will need to pinclude <unistd.h>

include this header.

This means "The a option is valid; so is the e option."

The code to handle while ((ch = getopt(argc, argv, "ae:")) != EOF)

switch(ch) {

The ":" means that the e option needs an argument.

ease 'e':

engine_count = optarg;

option here.

These final two lines make sure we skip past the options we read.

argv += optind;

line to get past the options.
```

Inside the loop, you have a switch statement to handle each of the valid options. The string **ae:** tells the getopt() function that a and e are valid options. The e is followed by a colon to tell getopt() that the -e needs to be followed by an extra argument. getopt() will point to that argument with the **optarg** variable.

When the loop finishes, you tweak the argv and argc variables to skip past all of the options and get to the main command-line arguments. That will make your argv array look like this:





After processing the arguments, the 0th argument will no longer be the program name.

argv[0] will instead point to the first command-line argument that follows the options.

pizza puzzle



Pizza Pieces

Looks like someone's been taking a bite out of the pizza code. See if you can replace the pizza slices and rebuild the $order_pizza$ program.

```
#include <stdio.h>
#include <unistd.h>
int main(int argc, char *argv[])
 char *delivery = "";
 int thick = 0;
 int count = 0;
 char ch;
 while ((ch = getopt(argc, argv, "d _____")) != EOF)
   switch (ch) {
   case 'd':
    .....;
    break;
   case 't':
    .....;
    break;
   default:
    fprintf(stderr, "Unknown option: '%s'\n", optarg);
    return ;
   }
```

```
argv += optind;
if (thick)
 puts("Thick crust.");
if (delivery[0])
 printf("To be delivered %s.\n", delivery);
puts("Ingredients:");
for (count = _____; count < _____; count++)
 puts(argv[count]);
return 0;
              thick
                                                   you are here ▶
                                                                 151
```

argc -= optind;

www.it-ebooks.info

pizza unpuzzled



Pizza Pieces Solution


Looks like someone's been taking a bite out of the pizza code. You were to replace the pizza slices and rebuild the order_pizza program.

```
#include <stdio.h>
#include <unistd.h>
int main(int argc, char *argv[])
  char *delivery = "";
  int thick = 0;
                                  The 'd' is followed by a colon because it takes an argument.
  int count = 0;
  char ch;
  while ((ch = getopt(argc, argv,
                                                                                                         != EOF)
     switch (ch) {
     case 'd':
                                                              We'll point the delivery variable to the argument supplied with the 'd' option.
             delivery
                                         optarg
        break;
     case 't':
                                                           Remember: in C, setting something to 1 is equivalent to setting it to true.
        break;
     default:
        fprintf(stderr, "Unknown option: '%s'\n", optarg);
```

```
argc -= optind;
argv += optind;
if (thick)
  puts("Thick crust.");
if (delivery[0])
  printf("To be delivered %s.\n", delivery);
puts("Ingredients:");
                          After processing the options, the
                          first ingredient is argv[O].
                                                     argc
for (count = ...
                                                                    count++)
                                    count <
  puts(argv[count]);
return 0;
                                              We'll keep looping while we're less than arge.
```



Now you can try out the pizza-order program:

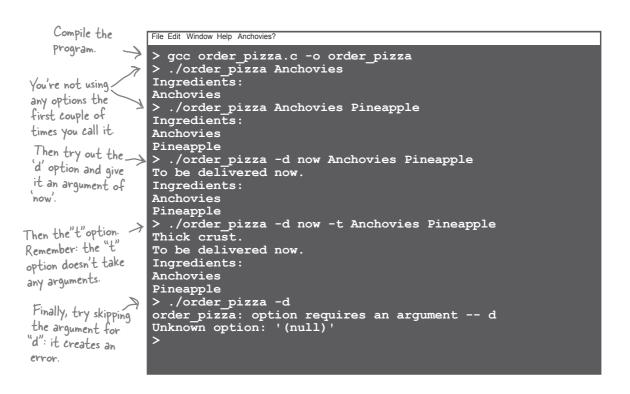

It works!

Well, you've learned a lot in this chapter. You got deep into the Standard Input, Standard Output, and Standard Error. You learned how to talk to files using redirection and your own custom data streams. Finally, you learned how to deal with command-line arguments and options.

A lot of C programmers spend their time creating small tools, and most of the small tools you see in operating systems like Linux are written in C. If you're careful in how you design them, and if you make sure that you design tools that **do one thing** and **do that one thing well**, you're well on course to becoming a kick-ass C coder.

there are no **Dumb Questions**

Can I combine options like -td now instead of -d now -t?

A: Yes, you can. The getopt() function will handle all of that for you.

What about changing the order of the options?

A: Because of the way we read the options, it won't matter if you type in -d now -t or -t -d now or -td now.

So if the program sees a value on the command line beginning with "-", it will treat it as an option?

A: If it reads it before it gets to the main command-line arguments, it will, yes.

But what if I want to pass negative numbers as command-line arguments like set_temperature -c -4? Won't it think that the 4 is an option, not an argument?

A: In order to avoid ambiguity, you can split your main arguments from the options using --. So you would write set_temperature -c -- -4. getopt() will stop reading options when it sees the --, so the rest of the line will be read as simple arguments.



BULLET POINTS

- There are two versions of the main() function—one with command-line arguments, and one without.
- Command-line arguments are passed to main() as an argument count and an array of pointers to the argument strings.
- Command-line options are command-line arguments prefixed with "-".
- The getopt() function helps you deal with command-line options.

- You define valid options by passing a string to getopt() like ae:.
- A ":" (colon) following an option in the string means that the option takes an additional argument.
- getopt() will record the options argument using the optarg variable.
- After you have read all of the options, you should skip past them using the optind variable.


Your C Toolbox

You've got Chapter 3 under your belt, and now you've added small tools to your toolbox. For a complete list of tooltips in the book, see Appendix ii.



4 using multiple source files

* Break it down, * * build it up *

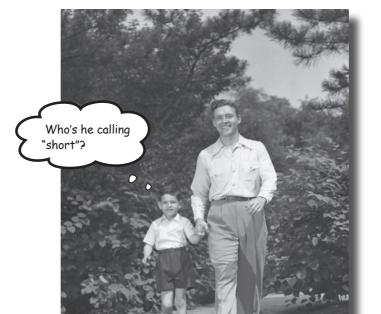

If you create a big program, you don't want a big source file.

Can you imagine how difficult and time-consuming a single source file for an enterprise-level program would be to maintain? In this chapter, you'll learn how C allows you to break your source code into **small, manageable chunks** and then rebuild them into **one huge program**. Along the way, you'll learn a bit more about **data type subtleties** and get to meet your new best friend: **make**.

guess the data type



Guess the Data TyPe


C can handle quite a few different types of data: characters and whole numbers, floating-point values for everyday values, and floating-point numbers for really precise scientific calculations. You can see a few of these data types listed on the opposite page. See if you can figure out which data type was used in each example.


Remember: each example uses a different data type.

using multiple source files

Each letter on the countdown display

90:00 MINUTES

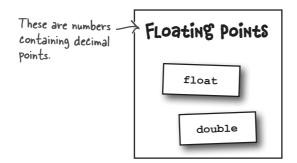

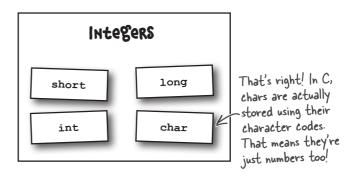

you are here ▶ 159

int

float



Guess the Data Type Solution

C can handle quite a few different types of data: characters and whole numbers, floating-point values for everyday values, and floating-point numbers for really precise scientific calculations. You can see a few of these data types listed on the opposite page. You were to figure out which data type was used in each example.

Remember: each example uses a different data type.

double

long

short

Each letter on the countdown display

char

90:00 MINUTES

Let's see why...

Your quick guide to data types

char

Each character is stored in the computer's memory as a character code. And that's just a number. So when the computer sees A, to the computer it's the same as seeing the literal number 65.

If you need to store a whole number, you can generally just use an int. The exact maximum size of an int can vary, but it's guaranteed to be at least 16 bits. In general, an int can store numbers up to a few million.

short

But sometimes you want to save a little memory. Why use an int if you just want to store numbers up to few hundreds or thousands? That's what a short is for. A short number usually takes up about half the space of an int.

long

Yes, but what if you want to store a **really large count**? That's what the long data type was invented for. On some machines, the long data type takes up *twice* the memory of an int, and it can hold numbers up in the **billions**. But because most computers can deal with really large ints, on a lot of machines, the long data type is *exactly the same size* as an int. The maximum size of a long is guaranteed to be at least 32 bits.

float

float is the basic data type for storing floating-point numbers. For most everyday floating-point numbers—like the amount of fluid in your orange mocha frappuccino—you can use a float.

double

Yes, but what if you want to get really **precise**? If you want to perform calculations that are accurate to a large number of **decimal places**, then you might want to use a double. A double takes up twice the memory of a float, and it uses that extra space to store numbers that are *larger* and more precise.

Pon't put something big into something small

When you're passing around values, you need to be careful that the type of the value matches the type of the variable you are going to store it in.

Different data types use different amounts of memory. So you need to be careful that you don't try to store a value that's too large for the amount of space allocated to a variable. short variables take up less memory than ints, and ints take up less memory than longs.


Now there's no problem storing a short value inside an int or a long variable. There is plenty of space in memory, and your code will work correctly:

short
$$x = 15$$
;
int $y = x$;
printf("The value of $y = in"$, y);

The problems start to happen if you go the other way around—if, say, you try to store an int value into a short.

Sometimes, the compiler will be able to spot that you're trying to store a really big value into a small variable, and then give you a warning. But a lot of the time the compiler won't be smart enough for that, and it will compile the code without complaining. In that case, when you try to run the code, the computer won't be able to store a number 100,000 into a short variable. The computer will fit in as many 1s and 0s as it can, but the number that ends up stored inside the y variable will be very different from the one you sent it:

The value of y = -31072

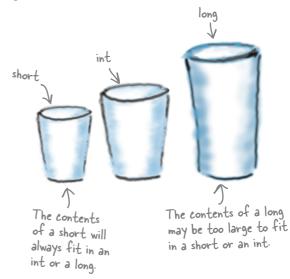



Geek Bits

So why did putting a large number into a short go negative? Numbers are stored in binary. This is what 100,000 looks like in binary:

x <- 0001 1000 0110 1010 0000

But when the computer tried to store that value into a short, it only allowed the value a couple of bytes of storage. The program stored just the *righthand side* of the number:

y <- 1000 0110 1010 0000

Signed values in binary beginning with a 1 in highest bit are treated as negative numbers. And this shortened value is equal to this in decimal:

-31072

Use casting to put floats into whole numbers

What do you think this piece of code will display?

```
int x = 7;

int y = 2;

float z = x / y;

printf("z = %f\n", z);
```

The answer? **3.0000**. Why is that? Well, x and y are both integers, and if you divide integers you always get a rounded-off whole number—in this case, **3**.

What do you do if you want to perform calculations on whole numbers and you want to get floating-point results? You could store the whole numbers into float variables first, but that's a little wordy. Instead, you can use a **cast** to convert the numbers on the fly:

```
int x = 7;


int y = 2;

float z = (float)x / (float)y;

printf("z = fn", z);
```

The **(float)** will *cast* an integer value into a float value. The calculation will then work just as if you were using floating-point values the entire time. In fact, if the compiler sees you are adding, subtracting, multiplying, or dividing a floating-point value with a whole number, it will automatically cast the numbers for you. That means you can cut down the number of explicit casts in your code:

float
$$z = (float) \times / y$$
; The compiler will automatically cast y to a float.



unsigned

The number will always be positive. Because it doesn't need to worry about recording negative numbers, unsigned numbers can store larger numbers since there's now one more bit to work with. So an unsigned int stores numbers from 0 to a maximum value that is about twice as large as the maximum number that can be stored inside an int. There's also a signed keyword, but you almost never see it, because all data types are signed by default.

lone

That's right, you can prefix a data type with the word long and make it longer. So a long int is a longer version of an int, which means it can store a larger range of numbers. And a long long is longer than a long. You can also use long with floating-point numbers.

long double d; long long is C99 and CII only.



164 Chapter 4

This will probably store numbers from 0 to 255



There's a new program helping the waiters bus tables at the Head First Diner. The code automatically totals a bill and adds sales tax to each item. See if you can figure out what needs to go in each of the blanks.

Note: there are several data types that could be used for this program, but which would you use for the kind of figures you'd expect?

```
#include <stdio.h>
.....total = 0.0;
.....count = 0;
.....tax_percent = 6;
.....add_with_tax(float f);
 .....tax_rate = 1 + tax_percent / 100 .....;
 total = total + (f * tax rate);
 count = count + 1;
 return total;
int main()
  .....val;
 printf("Price of item: ");
  while (scanf("%f", &val) == 1) {
    printf("Total so far: %.2f\n", add_with_tax(val));
    printf("Price of item: "); %.2f formats a floating-point
                                   number to two decimal places.
  printf("\nFinal total: %.2f\n", total);
  printf("Number of items: %hi\n", count);
  return 0;
                          %hi is used to format shorts.
```



There's a new program helping the waiters bus tables at the Head First Diner. The code automatically totals a bill and adds sales tax to each item. You were to figure out what needs to go in each of the blanks.

Note: there are several data types that could be used for this program, but which would you use for the kind of figures you'd expect?

```
You need
           #include <stdio.h>
a small
floating-point
number to
           float total = 0.0; There won't be many items on an
total the cash.
           short count = 0; order, so we'll choose a short.
           short tax percent = 6;
           float add_with_tax(float f); We're returning a small cash value, so it'll be a float.
A float will {
be OK for -
             > float     tax_rate = 1 + tax_percent / 100 .0......;
this fraction.
             total = total + (f * tax rate);
                                                                By adding . O, you make the
                                                                calculation work as a float If
             count = count + 1;
                                                                you left it as 100, it would
             return total;
                                                                 have returned a whole number.
                                                               1 + tax_percent / 100;
           int main()
                                                               would return the value 1
                    Each price will easily fit in a float.
                                                               because 6/100 == 0 in
                                                               integer arithmetic.
             float val;
             printf("Price of item: ");
             while (scanf("%f", &val) == 1) {
                printf("Total so far: %.2f\n", add with tax(val));
                printf("Price of item: ");
             printf("\nFinal total: %.2f\n", total);
             printf("Number of items: %hi\n", count);
             return 0;
```

Data Type Sizes Up Close



Data types are different sizes on different platforms. But how do you find out how big an int is, or how many bytes a double takes up? Fortunately, the C Standard Library has a couple of headers with the details. This program will tell you about the sizes of ints and floats:

```
#include <stdio.h>
           #include inits.h> — This contains the values for the integer types like int and char.
           #include <float.h> This contains the values for floats and doubles.
           int main()
           \rightarrow printf("The value of INT_MAX is %i\n", INT_MAX);
              printf("The value of INT_MIN is i\n", INT_MIN);
              printf("An int takes %z bytes\n", sizeof(int));
                                                                           This is the
This is the
                                                                           lowest value.
highest value.
            	exttt{	iny}printf("The value of FLT_MAX is %f\n", FLT_MAX);
              printf("The value of FLT MIN is %.50f\n", FLT MIN);
              printf("A float takes %z bytes\n", sizeof(float));
                                                         size of returns the number of
              return 0;
                                                         bytes a data type occupies.
```

When you compile and run this code, you will see something like this:

```
The value of INT_MAX is 2147483647
The value of INT_MIN is -2147483648
An int takes 4 bytes
The value of FLT_MAX is 340282346638528859811704183484516925440.000000
The value of FLT_MIN is 0.0000000000000000000000000000000001175494350822
A float takes 4 bytes
```

The values you see on your particular machine will probably be different.

What if you want to know the details for chars or doubles? Or longs? No problem. Just replace INT and FLT with CHAR (chars), DBL (doubles), SHRT (shorts), or LNG (longs).

bumb Questions

Why are data types different on different operating systems? Wouldn't it be less confusing to make them all the same?

A: C uses different data types on different operating systems and processors because that allows it to make the most out of the hardware.

In what way?

A: When C was first created, most machines were 8-bit. Now, most machines are 32- or 64-bit. Because C doesn't specify the exact size of its data types, it's been able to adapt over time. And as newer machines are created, C will be able to make the most of them as well.

What do 8-bit and 64-bit actually

A: Technically, the bit size of a computer can refer to several things, such as the size of its CPU instructions or the amount of data the CPU can read from memory. The bit size is really the favored size of numbers that the computer can deal with.

So what does that have to do with the size of ints and doubles?

A: If a computer is optimized best to work with 32-bit numbers, it makes sense if the basic data type—the int—is set at 32 bits

I understand how whole numbers like ints work, but how are floats and doubles stored? How does the computer represent a number with a decimal point?

A: It's complicated. Most computers used a standard published by the IEEE (http://tinyurl.com/6defkv6).

Do I really need to understand how floating-point numbers work?

A: No. The vast majority of developers use floats and doubles without worrying about the details.

Oh no...it's the out-of-work actors...

Some people were never really cut out to be programmers. It seems that some aspiring actors are filling in their time *between roles* and making a little extra cash by cutting code, and they've decided to spend some time freshening up the code in the bill-totalling program.

By the time they rejiggered the code, the actors were much happier about the way everything looked...but there's just a tiny problem.

The code doesn't compile anymore.



To you, it's code. To us, it's art.

Let's see what's happened to the code

This is what the actors did to the code. You can see they really just did a couple of things.

```
#include <stdio.h>
float total = 0.0;
short count = 0;
/* This is 6%. Which is a lot less than my agent takes...*/
short tax percent = 6;
int main()
  /* Hey - I was up for a movie with Val Kilmer */
  float val;
  printf("Price of item: ");
  while (scanf("%f", &val) == 1) {
    printf("Total so far: %.2f\n", add with tax(val));
    printf("Price of item: ");
  printf("\nFinal total: %.2f\n", total);
  printf("Number of items: %hi\n", count);
  return 0;
float add_with_tax(float f)
  float tax rate = 1 + tax percent / 100.0;
  /* And what about the tip? Voice lessons ain't free */
  total = total + (f * tax rate);
  count = count + 1;
  return total;
```

The code has had some comments added, and they also **changed the order of the functions**. They made no other changes.

So there really shouldn't be a problem. The code should be good to go, right? Well, everything was great, right up until the point that they **compiled the code...**

test drive




If you open up the console and try to compile the program, this happens:

```
> gcc totaller.c -o totaller && ./totaller totaller.c: In function "main": totaller.c:14: warning: format "%.2f" expects type "double", but argument 2 has type "int" totaller.c: At top level: totaller.c:23: error: conflicting types for "add_with_tax" totaller.c:14: error: previous implicit declaration of "add_with_tax" was here
```

Bummer.

That's not good. What does error: conflicting types for 'add_with_tax' mean? What is a *previous implicit declaration*? And why does it think the line that prints out the current total is now an int? Didn't we design that to be floating point?

The compiler will ignore the changes made to the comments, so that shouldn't make any difference. That means the problem must be caused by **changing the order of the functions**. But if the order is the problem, why doesn't the compiler just return a message saying something like:

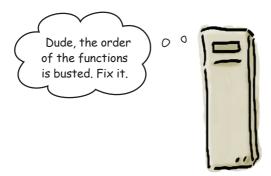

Seriously, why doesn't the compiler give us a little help here?

To understand exactly what's happening here, you need to get inside the head of the compiler for a while and look at things from its point of view. You'll see that what's happening is that the compiler is actually trying to be a little *too helpful*.

170 Chapter 4


Compilers don't like surprises

So what happens when the compiler sees this line of code?

printf("Total so far: %.2f\n", add_with_tax(val));

1 The compiler sees a call to a function it doesn't recognize.

Rather than complain about it, the compiler figures that it will find out more about the function later in the source file. The compiler simply remembers to look out for the function later on in the file. Unfortunately, this is where the problem lies...

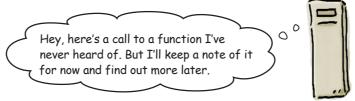


The compiler needs to know what data type the function will return.

Of course, the compiler can't know what the function will return just yet, so it makes an assumption. The compiler assumes it will return an int.



When it reaches the code for the actual function, it returns a "conflicting types for 'add_with_tax" error.

This is because the compiler thinks it has two functions with the same name. One function is the real one in the file. The other is the one that the compiler assumed would return an int.

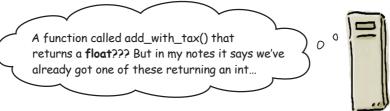



The computer makes an assumption that the function returns an int, when in reality it returns a float. If you were designing the C language, how would you fix the problem?

Hello? I really don't care how the C language solves the problem. Just put the functions in the correct freaking order!

You could just put the functions back in the correct order and define the function before you call it in main().

Changing the order of the functions means that you can avoid the compiler ever making any dangerous assumptions about the return types of unknown functions. But if you force yourself to always define functions in a specific order, there are a couple of consequences.

Fixing function order is a pain


Say you've added a cool new function to your code that everyone thinks is fantastic:


```
int do_whatever(){...}
float do_something_fantastic(int awesome_level) {...}
int do_stuff() {
   do_something_fantastic(11);
}
```


What happens if you then decide your program will be even better if you add a call to the do_something_fantastic() function in the existing do_whatever() code? You will have to **move the function** earlier in the file. Most coders want to spend their time improving what their code can do. It would be better if you didn't have to shuffle the order of the code just to keep the compiler happy.

In some situations, there is no correct order

OK, so this situation is kind of rare, but occasionally you might write some code that is **mutually recursive**:

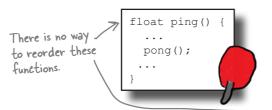





If you have two functions that call each other, then one of them will always be called in the file before it's defined.

For both of those reasons, it's really useful to be able to define functions in whatever order is easiest at the time. But how?

172 Chapter 4

Over to

you, Cecil!

Split the declaration from the definition

Remember how the compiler made a note to itself about the function it was expecting to find later in the file? You can avoid the compiler making assumptions by *explicitly telling it what functions it should expect*. When you tell the compiler about a function, it's called a **function declaration**:

```
The declaration tells the compiler > float add_with_tax(); < It just ends with a; (semicolon).
```

The declaration is just a function **signature**: a record of what the function will be called, what kind of parameters it will accept, and **what type of data it will return**.


Once you've declared a function, the compiler won't need to make any assumptions, so it won't matter if you define the function after you call it.

So if you have a whole bunch of functions in your code and you don't want to worry about their order in the file, you can put a list of function declarations at the start of your C program code:

```
float do_something_fantastic();
double awesomeness_2_dot_0();
int stinky_pete();
char make maguerita(int count);
```

But even better than that, C allows you to take that whole set of declarations *out of your code* and put them in a **header file**. You've already used header files to include code from the C Standard Library:

Let's go see how you can create your own header files.

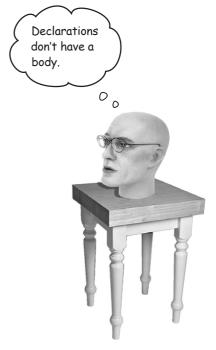


Creating your first header file

To create a header, you just need to do **two things**:



Create a new file with a .h extension.

If you are writing a program called totaller, then create a file called *totaller.h* and write your declarations inside it:




You won't need to include the main() function in the header file, because nothing else will need to call it.



Include your header file in your main program.

At the top of your program, you should add an extra include line:

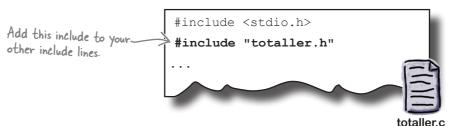

When you write the name of the header file, make sure you surround it with double quotes rather than angle brackets. Why the difference? When the compiler sees an include line with angle brackets, it assumes it will find the header file somewhere off in the directories where the library code lives. But **your** header file is in the same directory as your $\cdot \boldsymbol{c}$ file. By wrapping the header filename in quotes, you are telling the compiler to look for a local file.

When the compiler reads the #include in the code, it will read the contents of the header file, just as if it had been typed into the code.

Separating the declarations into a separate header file keeps your main code a little shorter, and it has another *big advantage* that you'll find out about in a few pages.

For now, let's see if the header file fixed the mess.

Local header files can also include directory names, but you will normally put them in the same directory as the C file.

#include is a preprocessor instruction.



Now when you compile the code, this happens:

```
File Edit Window Help UseHeaders

> gcc totaller.c -o totaller

No error

messages
this time.
```

The compiler reads the function declarations from the header file, which means it doesn't have to make any guesses about the return type of the function. The order of the functions doesn't matter.

Just to check that everything is OK, you can run the generated program to see if it works the same as before.

```
File Edit Window Help UseHeaders

> ./totaller

Price of item: 1.23

Total so far: 1.30

Price of item: 4.57

Total so far: 6.15

Price of item: 11.92

Total so far: 18.78

Price of item: ^D

Final total: 18.78

Number of items: 3
```

Press Ctrl-D here to stop the program from asking for more prices.

BE the Compiler
Look at the program below. Part of the

Look at the program below. Part of the program is missing. Your job is to play like you're the compiler and say what

you would do if each of the candidate code fragments on the right were slotted into the missing space.

Candidate code goes here.

```
#include <stdio.h>

printf("A day on Mercury is %f hours\n", day);
return 0;
}

float mercury_day_in_earth_days()
{
  return 58.65;
}

int hours_in_an_earth_day()
{
  return 24;
}
```

```
Here are the code fragments.
```

```
Mark the boxes that
                                                                     you think are correct.
float mercury day in earth days();
int hours in an earth day();
                                                                      You can compile the code.
int main()
                                                                      You should display a warning.
                                                                      The program will work.
  float length of day = mercury day in earth days();
  int hours = hours_in_an_earth_day();
  float day = length of day * hours;
  float mercury day in earth days();
                                                                       You can compile the code.
  int main()
                                                                       You should display a warning.
    float length of day = mercury day in earth days();
                                                                       The program will work.
    int hours = hours in an earth day();
     float day = length of day * hours;
                                                                      You can compile the code.
 int main()
                                                                      You should display a warning.
    float length of day = mercury day in earth days();
   int hours = hours in an earth day();
                                                                      The program will work.
    float day = length of day * hours;
     float mercury day in earth days();
     int hours_in_an_earth_day();
                                                                        You can compile the code.
     int main()
                                                                       You should display a warning.
       int length of day = mercury day in earth days();
                                                                       The program will work.
       int hours = hours in an earth day();
       float day = length_of_day * hours;
                                                                                        177
                                                                        you are here ▶
```

BE the Compiler Solution

Look at the program below. Part of the program is missing. Your job was to play like you're the compiler and say what

you would do if each of the candidate code fragments on the right were slotted into the missing space.

```
#include <stdio.h>

printf("A day on Mercury is %f hours\n", day);
return 0;
}

float mercury_day_in_earth_days()
{
  return 58.65;
}

int hours_in_an_earth_day()
{
  return 24;
}
```

you are here ▶

179

```
float mercury day in earth days();
int hours in an earth day();
                                                                          You can compile the code.
int main()
                                                                          You should display a warning.
                                                                          The program will work.
  float length of day = mercury day in earth days();
  int hours = hours in an earth day();
                                                                     There will be a warning, beause you haven't
  float day = length of day * hours;
                                                                     declared the hours_in_an_earth_day()
                                                                     before calling it. The program will still
                                                                     work because it will guess the function
                                                                      returns an int.
  float mercury day in earth days();
                                                                            You can compile the code.
  int main()
                                                                            You should display a warning.
    float length of day = mercury day in earth days();
                                                                            The program will work.
    int hours = hours in an earth day();
    float day = length of day * hours;
                        The program won't compile, because you're calling
 int main()
                                                                           You can compile the code.
                        a float function without declaring it first.
                                                                           You should display a warning.
   float length of day = mercury day in earth days();
   int hours = hours in an earth day();
                                                                           The program will work.
    float day = length of day * hours;
                                                                          The program will compile without
                                                                          warnings, but it won't work
                                                                          because there will be a rounding
     float mercury_day_in_earth_days();
                                                                          problem.
    int hours in an earth day();
                                                                            You can compile the code.
    int main()
                        The length_of_day variable should be a float.
                                                                            You should display a warning.
       int length_of_day = mercury_day_in_earth_days();
                                                                            The program will work.
       int hours = hours in an earth day();
       float day = length of day * hours;
```

there are no Questions

So I don't need to have declarations for int functions?

A: Not necessarily, unless you are sharing code. You'll see more about this soon

l'm confused. You talk about the compiler preprocessing? Why does the compiler do that?

A: Strictly speaking, the compiler just does the compilation step: it converts the C source code into assembly code. But in a looser sense, all of the stages that convert the C source code into the final executable are normally called *compilation*, and the gcc tool allows you to control those stages. The gcc tool does preprocessing and compilation.

What is the preprocessor?

A: Preprocessing is the first stage in converting the raw C source code into a working executable. Preprocessing creates a modified version of the source just before the *proper* compilation begins. In your code, the preprocessing step read the contents of the header file into the main file.

October the preprocessor create an actual file?

A: No, compilers normally just use pipes for sending the stuff through the phases of the compiler to make things more efficient.

Why do some headers have quotes and others have angle brackets?

A: Strictly speaking, it depends on the way your compiler works. Usually quotes mean to simply look for a file using a relative path. So if you just include the name of a file, without including a directory name, the compiler will look in the current directory. If angle brackets are used, it will search for the file along a path of directories.

What directories will the compiler search when it is looking for header files?

A: The gcc compiler knows where the standard headers are stored. On a Unix-style operating system, the header files are normally in places like /usr/local/include, /usr/include, and a few others.

So that's how it works for standard headers like stdio.h?

Yes. You can read through the stdio.h file on a Unix-style machine in /usr/include/stdio.h. If you have the MinGW compiler on Windows, it will probably be in C:\MinGW\include\stdio.h.

Can I create my own libraries?

A: Yes; you'll learn how to do that later in the book.



BULLET POINTS

- If the compiler finds a call to a function it hasn't heard of, it will assume the function returns an int.
- So if you try to call a function before you define it, there can be problems.
- Function declarations tell the compiler what your functions will look like before you define them.
- If function declarations appear at the top of your source code, the compiler won't get confused about return types.

- Function declarations are often put into header files.
- You can tell the compiler to read the contents of a header file using #include.
- The compiler will treat included code the same as code that is typed into the source file.



This Table's Reserved...

C is a very small language. Here is the entire set of reserved words (in no useful order).

Every C program you ever see will break into just these words and a few symbols. If you use these for names, the compiler will be very, very upset.

auto	if	break	
int	case	long	
char	register	continue	
return	default	short	
do	sizeof	double	
static	else	struct	
entry	switch	extern	
typedef	float	union	
for	unsigned	goto	
while	enum	void	
const	signed	volatile	

If you have common features...

Chances are, when you begin to write several programs in C, you will find that there are some functions and features that you will want to reuse from other programs. For example, look at the specs of the two programs on the right.

XOR encryption is a very simple way of disguising a piece of text by XOR-ing each character with some value. It's not very secure, but it's very easy to do. And the same code that can encrypt text can also be used to decrypt it. Here's the code to encrypt some text:

```
void means don't
                    \Rightarrowvoid encrypt(char *message)
return anything.
                                                     Pass a pointer to an
                                                      array into the function.
                          char c;
Loop through the
                                                                    This means
                        \Rightarrow while (*message) {
array and update each
                                                                     you'll XOR each
                             *message = *message ^ 31;
character with an
                                                                     character with
                                                                     the number 31.
encrypted version.
                            message++;
                          }
                       }
```

file_hider
Read the contents
of a file and create
an encrypted version
using XOR encryption.

message_hider

Read a series of strings

from the standard

Input and display an

encrypted version on

the standard output

using xor encryption.

Doing math with a character? You can because char is a numeric data type.

...it's good to share code

Clearly, both of those programs are going to need to use the same encrypt() function. So you could just copy the code from one program to the other, right? That's not so bad if there's just a small amount of code to copy, but what if there's a really large amount of code? Or what if the way the encrypt() function works needs to change in the future? If there are two copies of the encrypt() function, you will have to change it in more than one place.

For your code to scale properly, you really need to find some way to reuse common pieces of code—some way of taking a set of functions and making them available in a bunch of different programs.




Imagine you have a set of functions that you want to share between programs. If you had created the C programming language, how would you allow code to be shared?

How would you do that?

You can split the code into separate files

If you have a set of code that you want to share among several files, it makes a lot of sense to put that shared code into a separate .c file. If the compiler can somehow include the shared code when it's compiling the program, you can use the same code in multiple applications at once. So if you ever need to change the shared code, you only have to do it in one place.

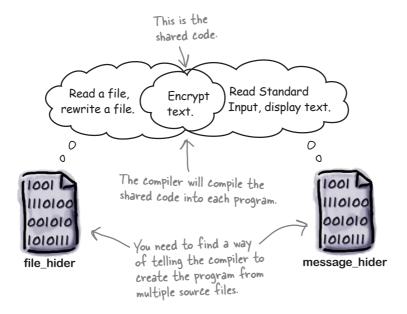

If you want to use a separate .c file for the shared code, that gives us a *problem*. So far, you have only created programs from single .c source files. So if you had a C program called blitz_hack, you would have created it from a single source code file called *blitz_hack.c*.

But now you want some way to give the compiler a **set of source code files** and say, "Go make a program from those." How do you do that? What syntax do you use with the gcc compiler? And more importantly, what does it *mean* for a compiler to create a single executable program from several files? How would it work? How would it stitch them together?

To understand how the C compiler can create a single program from multiple files, let's take a look at how compilation works...

Compilation behind the scenes

To understand how a compiler can compile several source files into a single program, you'll need to pull back the curtain and see how compilation really works.

Hmmmm...so I need to compile the source files into a program? Let's see what I can cook up...

00

just a fancy

word for "command."




Preprocessing: fix the source.

The first thing the compiler needs to do is fix the source. It needs to add in any extra header files it's been told about using the #include **directive**.

"directive" is > It might also need to expand or skip over some sections of the program. Once it's done, the source code will be ready for the actual compilation.

It can do this with commands like #define and #ifdef. You'll see how to use them later in the book.

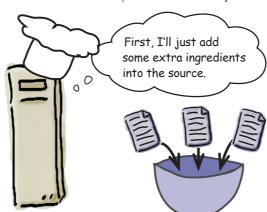



Compilation: translate into assembly.

The C programming language probably seems pretty low level, but the truth is it's not low level enough for the computer to understand. The computer only really understands very low-level machine code instructions, and the first step to generate machine code is to convert the C source code into **assembly language symbols** like this:

> movq -24(%rbp), %rax movzbl(%rax), %eax movl %eax, %edx

Looks pretty obscure? Assembly language describes the individual instructions the central processor will have to follow when running the program. The C compiler has a whole set of recipes for each of the different parts of the C language. These recipes will tell the compiler how to convert an if statement or a function call into a sequence of assembly language instructions. But even assembly isn't low level enough for the computer. That's why it needs...






Assembly: generate the object code.

The compiler will need to *assemble* the symbol codes into *machine* or **object code**. This is the actual binary code that will be executed by the circuits inside the CPU.

This is a really _ dirty joke in machine code.

^{≥1} 10010101 00100101 11010101 01011100

So are you all done? After all, you've taken the original C source code and converted it into the 1s and 0s that the computer's circuits need. But no, there's still one more step. If you give the computer several files to compile for a program, the compiler will generate a piece of object code for each source file. But in order for these separate object files to form a single executable program, one more thing has to occur...

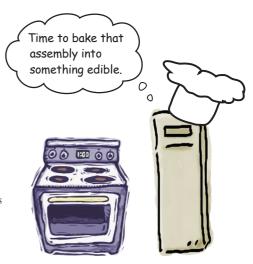



Linking: put it all together.

Once you have all of the separate pieces of object code, you need to fit them together like jigsaw pieces to form the **executable program**. The compiler will connect the code in one piece of object code that calls a function in another piece of object code. Linking will also make sure that the program is able to call library code properly. Finally, the program will be written out into the executable program file using a format that is supported by the operating system. The file format is important, because it will allow the operating system to load the program into memory and make it run.



So how do you actually tell gcc that we want to make one executable program from several separate source files?

The shared code needs its own header file

If you are going to share the *encrypt.c* code between programs, you need some way to tell those programs about the encrypt code. You do that with a header file.

```
You'll include the header inside encrypt.c.
```

```
void encrypt(char *message);
encrypt.h
```

Include encrypt.h in your program

You're not using a header file here to be able to reorder the functions. You're using it to **tell other programs about the encrypt() function**:

```
#include "encrypt.h"

void encrypt(char *message)
{
   char c;
   while (*message) {
     *message = *message ^ 31;
     message++;
   }
}
```

encrypt.c

```
#include <stdio.h>
#include "encrypt.h"

int main()
{
  char msg[80];
  while (fgets(msg, 80, stdin)) {
    encrypt(msg);
    printf("%s", msg);
  }
}
```

message_hider.c

Having <code>encrypt.h</code> inside the main program will mean the compiler will know enough about the <code>encrypt()</code> function to compile the code. At the linking stage, the compiler will be able to connect the call to <code>encrypt(msg)</code> in <code>message_hider.c</code> to the actual <code>encrypt()</code> function in <code>encrypt.h</code>.

Finally, to compile everything together you just need to pass the source files to gcc:

gcc message hider.c encrypt.c -o message hider

You'll include enerypt.h so that the program has the declaration of the enerypt() function.

Sharing variables

You've seen how to share functions between different files. But what if you want to share variables? Source code files normally contain their own separate variables to prevent a variable in one file affecting a variable in another file with the same name. But if you genuinely want to share variables, you should declare them in your header file and prefix them with the keyword extern:

extern int passcode;



Let's see what happens when you compile the message_hider program:

You need to compile the code; with both source files.

When you run the program, you can enter text and see the encrypted version.

You can even pass it the contents of the encrypt. If file to encrypt it.

File Edit Window Help Shih...

> gcc message_hider.c encrypt.c -o message_hider

> ./message_hider

I am a secret message

V?~r?~?lz|mzk?rzll~xz

> ./message_hider < encrypt.h

ipv{?zq|mfok7|w~m5?rzll~xz6\$

>

The message hider program is using the encrypt() function from encrypt.c.

The program works. Now that you have the encrypt() function in a separate file, you can use it in any program you like. If you ever change the encrypt() function to be something a little more secure, you will need to amend only the <code>encrypt.c</code> file.




BULLET POINTS

- You can share code by putting it into a separate C file.
- You need to put the function declarations in a separate .h header file.
- Include the header file in every C file that needs to use the shared code.
- List all of the C files needed in the compiler command.



Go Off Piste

Write your own program using the <code>encrypt()</code> function. Remember, you can call the same function to decrypt text.

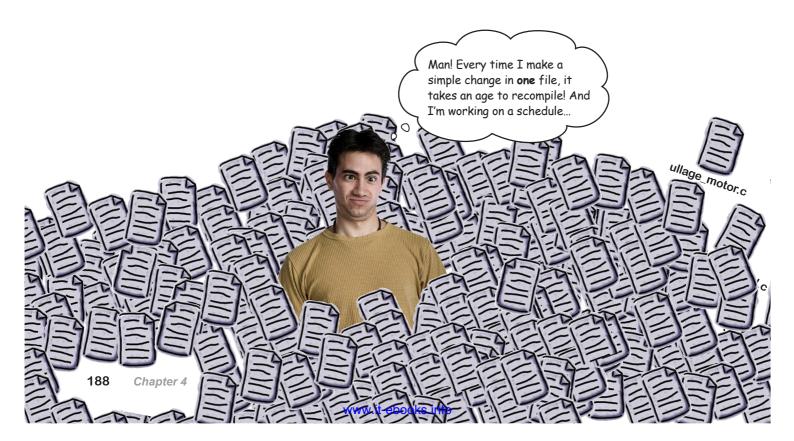


It's not rocket science...or is it?

Breaking your program out into separate source files not only means that you can *share code* between different programs, but it also means you can start to create *really large* programs. Why? Well, because you can start to break your program down into smaller **self-contained** pieces of code. Rather than being forced to have one *huge* source file, you can have lots of *simpler* files that are easier to understand, maintain, and test.

So on the plus side, you can start to create really large programs. The downside? The downside is...you can start to create really large programs. C compilers are really efficient pieces of software. They take your software through some very complex transformations. They can modify your source, link hundreds of files together without blowing your memory, and even optimize the code you wrote, along the way. And even though they do all that, they still manage to run quickly.

But if you create programs that use more than a few files, the time it takes to compile the code starts to become important. Let's say it takes a minute to compile a large project. That might not sound like a lot of time, but it's more than long enough to break your train of thought. If you try out a change in a single line of code, you want to see the result of that change as quickly as possible. If you have to wait a full minute to see the result of every change, that will really start to slow you down.

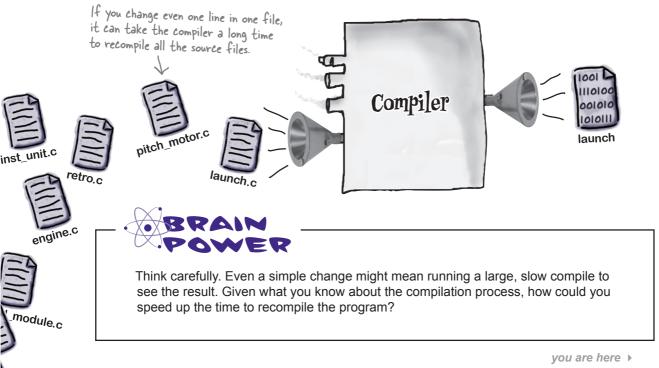

189

Don't recompile every file

If you've just made a change to one or two of your source code files, it's a waste to recompile every source file for your program. Think what happens when you issue a command like this:


gcc reaction_control.c pitch_motor.c ... engine.c -o launch

Skipping a few filenames here.

What will the compiler do? It will run the preprocessor, compiler, and assembler for *each source code file*. Even the ones that haven't changed. And if the source code hasn't changed, the **object code** that's generated for that file won't change either. So if the compiler is generating the object code for every file, every time, what do you need to do?

Save copies of the compiled code

If you tell the compiler to save the object code it generates into a file, it shouldn't need to recreate it unless the source code changes. If a file *does* change, you can recreate the object code for that **one file** and then pass the whole set of object files to the compiler so they can be linked.

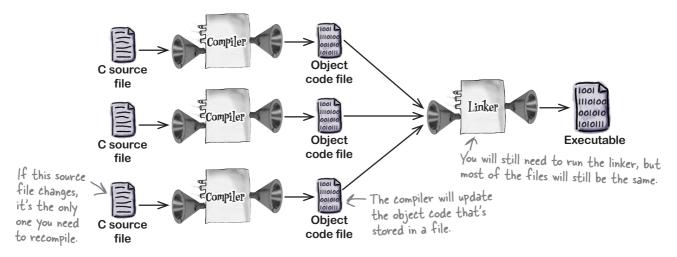

If you change a single file, you will have to recreate the object code file from it, but you *won't* need to create the object code for any other file. Then you can pass all the object code files to the linker and create a new version of the program.

So how do you tell gcc to save the object code in a file? And how do you then get the compiler to link the object files together?

190 Chapter 4

First, compile the source into object files

You want object code for each of the source files, and you can do that by typing this command:

This will create object > gcc -c *.c The operating system will replace code for every file.

The *.c will match every C file in the current directory, and the -c will tell the compiler that you want to create an object file for each source file, but you don't want to link them together into a full executable program.

Then, link them together

Now that you have a set of object files, you can link them together with a simple compile command. But instead of giving the compiler the names of the C source files, you tell it the names of the object files:

This is similar to the = gcc *.o -o launch the object files.

compile commands


you've used before. This will match all the object files in the directory.

The compiler is smart enough to recognize the files as object files, rather than source files, so it will skip most of the compilation steps and just link them together into an executable program called launch.


OK, so now you have a compiled program, just like before. But you also have a set of object files that are ready to be linked together if you need them again. So if you change just one of the files, you'll only need to recompile that single file and then relink the program:

This is the only file gcc -c thruster.c (This will recreate the thruster.o file. that's changed. gcc *.o -o launch (This will link everything together.

Even though you have to type two commands, you're saving a *lot* of time:

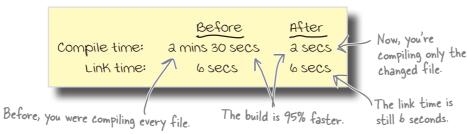


gcc -c will compile the code but won't link it.

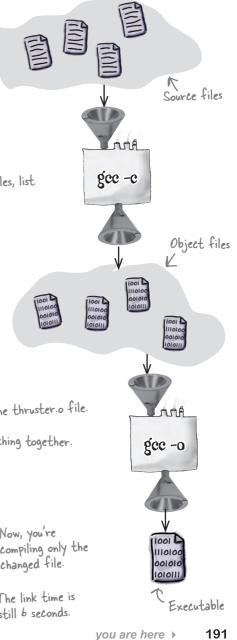


www.it-ebooks.info

Long Exercise

Here is some of the code that's used to control the engine management system on the craft. There's a timestamp on each file. Which files do you think need to be recreated to make the ems executable up to date? Circle the files you think need to be updated.

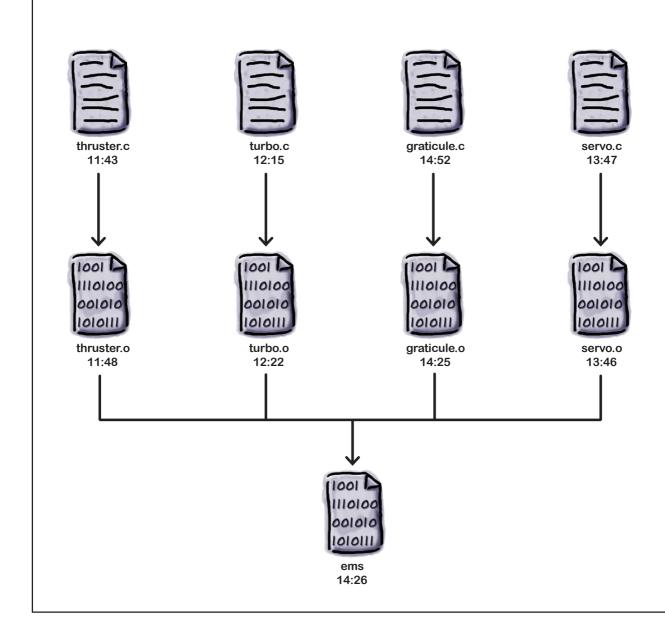


And in the galley, they need to check that their code's up to date as well. Look at the times against the files. Which of these files need to be updated?

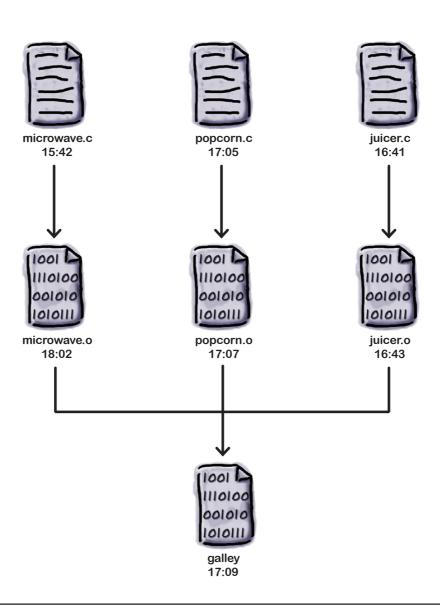




Here is some of the code that's used to control the engine management system on the craft. There's a timestamp on each file. You were to circle the files you think need to be recreated to make the ems executable up to date.

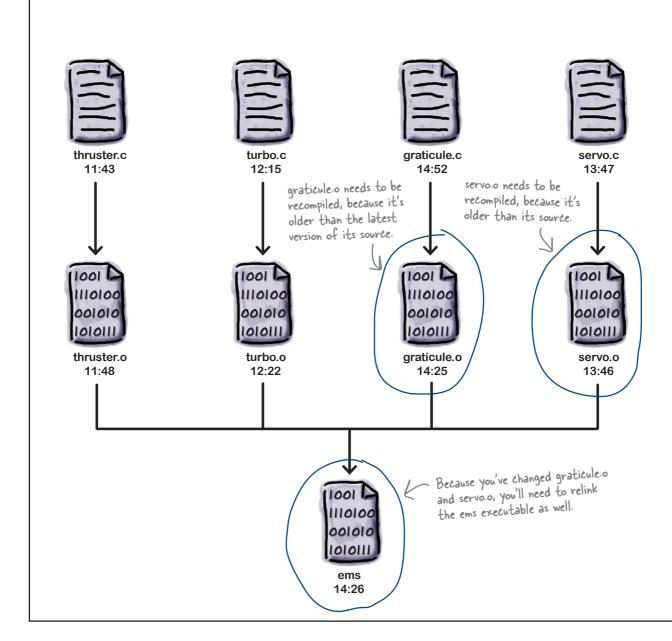

And in the galley, they need to check that their code's up to date as well. Look at the times against the files. Which of these files need to be updated?

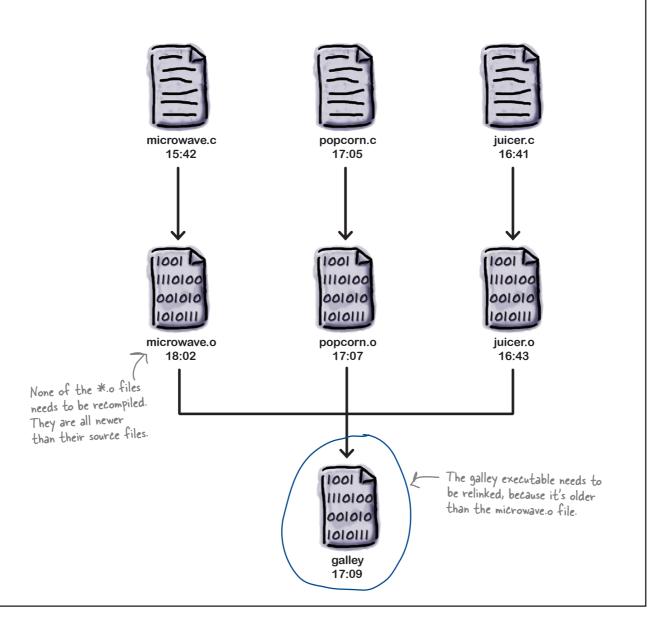

It's hard to keep track of the files

I thought the whole point of saving time was so I didn't have to get distracted. Now the compile is faster, but I have to think a lot harder about how to compile my code. Where's the sense in that?



It's true: partial compiles are faster, but you have to think more carefully to make sure you recompile everything you need.

If you are working on just one source file, things will be pretty simple. But if you've changed a few files, it's pretty easy to forget to recompile some of them. That means the newly compiled program won't pick up all the changes you made. Now, of course, when you come to *ship* the final program, you can always make sure you can do a full recompile of *every* file, but you don't want to do that while you're still developing the code.

Even though it's a fairly **mechanical process** to look for files that need to be compiled, if you do it manually, it will be pretty easy to miss some changes.

Is there something we can use to **automate the process**?

Wouldn't it be dreamy if there were a tool that could automatically recompile just the source that's changed? But I know it's just a fantasy...



Automate your builds with the make tool

You can compile your applications really quickly in gcc, as long as you keep track of which files have changed. That's a tricky thing to do, but it's also pretty straightforward to automate. Imagine you have a file that is generated from some other file. Let's say it's an object file that is compiled from a source file:

How do you tell if the thruster.o file needs to be recompiled? You just look at the timestamps of the two files. If the thruster.o file is older than the thruster.c file, then the thruster.o file needs to be recreated. Otherwise, it's up to date.

That's a pretty simple rule. And if you have a simple rule for something, then don't think about it—automate it...

make is a tool that can run the compile command for you. The make tool will check the timestamps of the source files and the generated files, and then it will only recompile the files if things have gotten out of date.

But before you can do all these things, you need to tell make about your source code. It needs to know the details of which files depend on which files. And it also needs to be told exactly how you want to build the code.


What does make need to know?

Every file that make compiles is called a target. Strictly speaking, make isn't limited to compiling files. A target is any file that is generated from some other files. So a target might be a zip archive that is generated from the set of files that need to be compressed.

For every target, make needs to be told two things:


- The dependencies.
 - Which files the target is going to be generated from.
- The recipe. The set of instructions it needs to run to generate the file.

Together, the dependencies and the recipe form a rule. A rule tells make all it needs to know to create the target file.



This is make, your new best friend.

Hmm...this file's OK. And this one. And this one. And...ah, this one's out of date. I'd better send that to the compiler.



198 Chapter 4

How make works

Let's say you want to compile *thruster.c* into some object code in *thruster.o*. What are the dependencies and what's the recipe?

thruster.c -> thruster.o

The *thruster.o* file is called the *target*, because it's the file you want to generate. *thruster.c* is a dependency, because it's a file the compiler will need in order to create *thruster.o*. And what will the recipe be? That's the compile command to convert *thruster.c* into *thruster.o*.


gcc -c thruster.c
This is the rule for creating thruster.o.

Make sense? If you tell the make tool about the dependencies and the recipe, you can leave it to make to decide when it needs to recompile *thruster.o*.

But you can go further than that. Once you build the *thruster.o* file, you're going to use it to create the launch program. That means the launch file can also be set up as a target, because it's a file you want to generate. The dependency files for launch are all of the .o object files. The recipe is this command:

gcc *.o -o launch

Once make has been given the details of all of the dependencies and rules, all you have to do is tell it to create the launch file. make will work out the details.

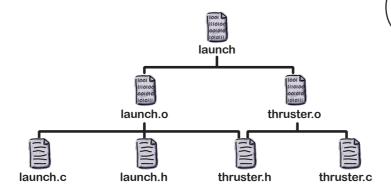

But how do you tell make about the dependencies and recipes? Let's find out.



The make tool may have a different name on Windows.

Because make came from the Unix world, there are different flavors of it available in Windows. MinGW includes a version of make called mingw32-make and Microsoft produce their own version called NMAKE.

:


So I've got to compile the launch program? Hmm...
First I'll need to recompile thruster.o, because it's out of date; then I just need to relink launch.



www.it-ebooks.info


Tell make about your code with a makefile

All of the details about the targets, dependencies, and recipes need to be stored in a file called either *makefile* or *Makefile*. To see how it works, imagine you have a pair of source files that together create the launch program:

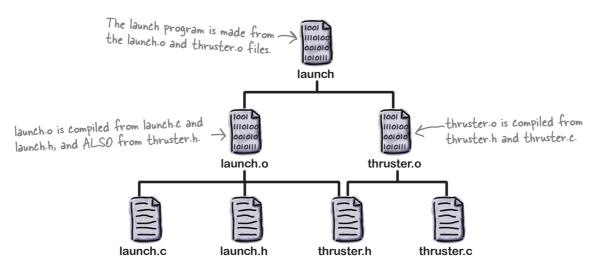

The launch program is made by linking the *launch.o* and *thruster.o* files. Those files are compiled from their matching C and header files, but the *launch.o* file *also* depends on the *thruster.h* file because it contains code that will need to call a function in the thruster code.

This is how you'd describe that build in a makefile:

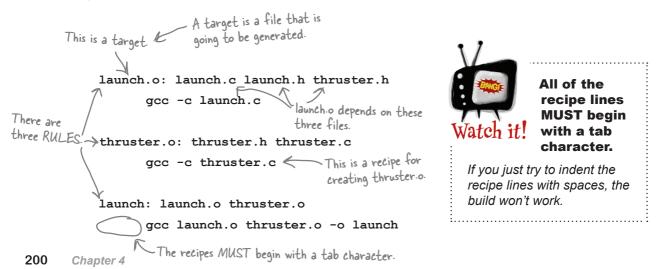

www.it-ebooks.info



Save your make rules into a text file called *Makefile* in the same directory; then, open up a console and type the following:

```
You are telling make to create the launch file.

make first needs to create a launch.o with this line.

make then needs to create thruster.o with this line.

Finally, make links the object files to create the launch program.
```

You can see that make was able to work out the sequence of commands required to create the launch program. But what happens if you make a change to the *thrustenc* file and then run make again?

make is able to skip creating a new version of *launch.o*. Instead, it just compiles *thruster.o* and then relinks the program.

bumb Questions

Q: Is make just like ant?

A: It's probably better to say that build tools like ant and rake are like make. make was one of the earliest tools used to automatically build programs from source code.

This seems like a lot of work just to compile source code. Is it really that useful?

Yes, make is amazingly useful. For small projects, make might not appear to save you that much time, but once you have more than a handful of files, compiling and linking code together can become very painful.

on a Mac? Or a Linux machine?

A: Because makefiles calls commands in the underlying operating system, sometimes makefiles don't work on different operating systems.

Can I use make for things other than compiling code?

A: Yes. make is most commonly used to compile code. But it can also be used as a command-line installer, or a source control tool. In fact, you can use make for almost any task that you can perform on the command line.



Why indent with tabs?

It's easy to indent recipes with spaces instead of tabs. So why does make insist on using tabs? This is a quote from make's creator, Stuart Feldman:

"Why the tab in column 1? ... It worked, it stayed. And then a few weeks later I had a user population of about a dozen, most of them friends, and I didn't want to screw up my embedded base. The rest, sadly, is history."



Geek Bits

make takes away a lot of the pain of compiling files. But if you find that even it is not automatic enough, take a look at a tool called autoconf:

http://www.gnu.org/software/autoconf/


autoconf is used to generate makefiles. C programmers often create tools to automate the creation of software. An increasing number of them are available on the GNU website.



Make Magnets

Hey, baby, if you don't groove to the latest tunes, then you'll *love* the program the guys in the Head First Lounge just wrote! oggswing is a program that reads an Ogg Vorbis music file and creates a swing version. Sweet! See if you can complete the makefile that compiles oggswing and then uses it to convert a .ogg file:


This converts whitennerdy.ogg to swing.ogg.				
oggs	wing:			
0990		 	 	
swin	g.ogg:			
	• • • • • • • • • • • • • • • • • • • •	 	 • • • • • • • • • • • • • • • •	

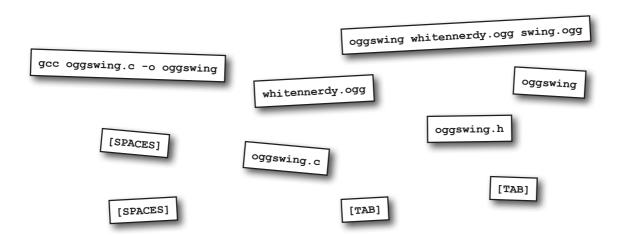



Make Magnets Solution

Hey, baby, if you don't groove to the latest tunes, then you'll *love* the program the guys in the Head First Lounge just wrote! oggswing is a program that reads an Ogg Vorbis music file and creates a swing version. Sweet! You were to complete the makefile that compiles oggswing and then uses it to convert a .ogg file:

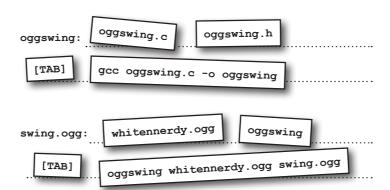



204 Chapter 4



BULLET POINTS

- It can take a long time to compile a large number of files.
- You can speed up compilation time by storing object code in *.o files.
- The gcc can compile programs from object files as well as source files.
- The make tool can be used to automate your builds.
- make knows about the dependencies between files, so it can compile just the files that change.
- make needs to be told about your build with a makefile.
- Be careful formatting your makefile: don't forget to indent lines with tabs instead of spaces.

Your C Toolbox

You've got Chapter 4 under your belt, and now you've added data types and header files to your toolbox. For a complete list of tooltips in the book, see Appendix ii.







CLab 1

Arduino

This lab gives you a spec that describes a program for you to build, using the knowledge you've gained over the last few chapters.

This project is bigger than the ones you've seen so far. So read the whole thing before you get started, and give yourself a little time. And don't worry if you get stuck. There are no new C concepts in here, so you can move on in the book and come back to the lab later.

We've filled in a few design details for you, and we've made sure you've got all the pieces you need to write the code. You can even build the physical device.

It's up to you to finish the job, but we won't give you the code for the answer.





The spec: make your houseplant talk

Ever wished your plants could tell you when they need watering? Well, with an Arduino they can! In this lab, you'll create an Arduino-powered plant monitor, all coded in C.


Here's what you're going to build.



The physical device

The plant monitor has a moisture sensor that measures how wet your plant's soil is. If the plant needs watering, an LED lights up until the plant's been watered, and the string "Feed me!" is repeatedly sent to your computer.

When the plant has been watered, the LED switches off and the string "Thank you, Seymour!" is sent once to your computer.

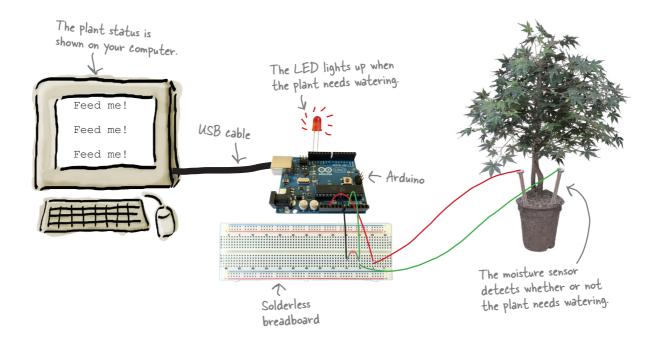


The Arduino

The brains of the plant monitor is an **Arduino**. An Arduino is a small microcontroller-based open source platform for electronic prototyping. You can connect it to sensors that pick up information about the world around it, and actuators that respond. All of this is controlled by code you write in C.

The Arduino board has 14 digital IO pins, which can be inputs or outputs. These tend to be used for reading on or off values, or switching actuators on or off.

The board also has six analog input pins, which take voltage readings from a sensor.


The board can take power from your computer's USB port.

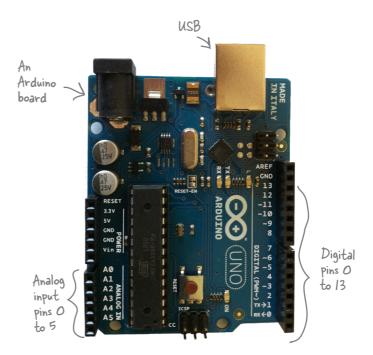

The Arduino IDE

You write your C code in an Arduino IDE. The IDE allows you to verify and compile your code, and then upload it to the Arduino itself via your USB port. The IDE also has a built-in serial monitor so that you can see what data the Arduino is sending back (if any).

The Arduino IDE is free, and you can get hold of a copy from www.arduino.cc/en/Main/Software.

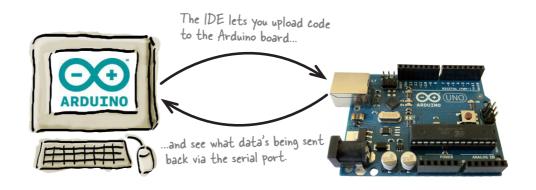

Build the physical device

You start by building the physical device. While this bit's optional, we really recommend that you give it a go. Your plants will thank you for it.

We used an Arduino Uno.

Build the moisture sensor

Take a long piece of jumper wire and attach it to the head of one of the galvanized nails. You can either wrap the wire around the nail or solder it in place.

Once you've done that, attach another long piece of jumper wire to the second galvanized nail.

The moisture sensor works by checking the conductivity between the two nails. If the conductivity is high, the moisture content must be high. If it's low, the moisture content must be low. You will need:

I Arduino
I solderless breadboard
I LED
I IOK Ohm resistor
2 galvanized nails
3 short pieces of jumper wire
2 long pieces of jumper wire




Connect the LED

Look at the LED. You will see that it has one longer (positive) lead and one shorter (negative) lead

Now take a close look at the Arduino. You will see that along one edge there are slots for 14 digital pins labeled 0–13, and another one next to it labeled GND. Put the long positive lead of the LED into the slot labeled 13, and the shorter negative lead into the slot labeled GND.


This means that the LED can be controlled through digital pin 13.

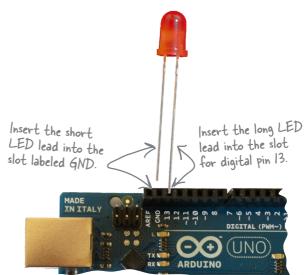

Connect the moisture sensor

Connect the moisture sensor as shown below:

- Connect a short jumper wire from the GND pin on the Arduino to slot D15 on the breadboard.
- Connect the 10K Ohm resistor from slot C15 on the breadboard to slot C10.
- Connect a short jumper wire from the 0 analog input pin to slot D10 on the breadboard.
- Take one of the galvanized nails, and connect the wire attached to it to slot B10.
- Connect a short jumper wire from the 5V pin on the Arduino to slot C5 on the breadboard.
- Take the other galvanized nail, and connect the wire attached to it to slot B5.

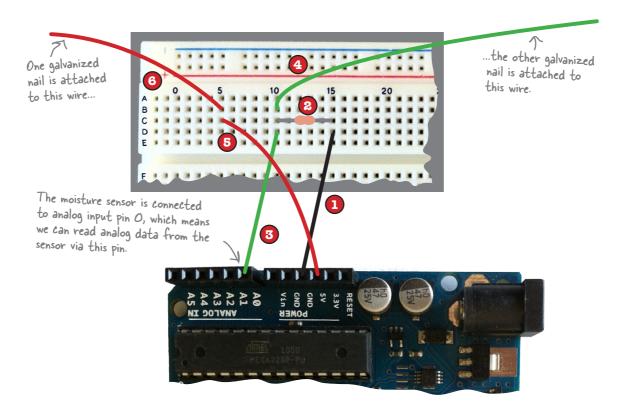

That's the physical Arduino built. Now for the C code...


Here's what your code should do

Your Arduino C code should do the following.

Read from the moisture sensor

The moisture sensor is connected to an analog input pin. You will need to read analog values from this pin.

Here at the lab, we've found that our plants generally need watering when the value goes below 800, but your plant's requirements may be different—say, if it's a cactus.

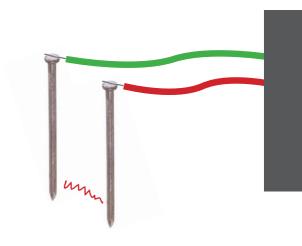



Write to the LED

The LED is connected to a digital pin.

When the plant doesn't need any more water, write to the digital pin the LED is connected to, and get it to switch off the LED.

When the plant needs watering, write to the digital pin and get it to switch on the LED. For extra credit, get it to flash. Even better, get it to flash when the conditions are borderline.

Write to the serial port

When the plant needs watering, repeatedly write the string "Feed me!" to the computer serial port.

When the plant has enough water, write the string "Thank you, Seymour!" to the serial port once.

Assume that the Arduino is plugged in to the computer USB socket.



Arduino

Here's what your C code should look like

An Arduino C program has a specific structure. Your program must implement the following:

```
void setup()
{
/*This is called when the program starts. It
basically sets up the board. Put any initialization
code here.*/
}

void loop()
{
/*This is where your main code goes. This function
loops over and over, and allows you to respond to
input from your sensors. It only stops running when
the board is switched off*/
}
```

You can add
extra functions
and declarations
if you like, but
without these
two functions
the code won't
work.

The easiest way of writing the Arduino C code is with the Arduino IDE. The IDE allows you to verify and compile your code, and then upload your completed program to the Arduino board, where you'll be able to see it running.

The Arduino IDE comes with a library of Arduino functions and includes lots of handy code examples. Turn the page to see a list of the functions you'll find most useful when creating Arduino.

Here are some useful Arduino functions

You'll need some of these to write the program.

void pinMode(int pin, int mode)

Tells the Arduino whether the digital pin is an input or output. mode can be either INPUT or OUTPUT.

int digitalRead(int pin)

Reads the value from the digital pin. The return value can be either HIGH or LOW.

void digitalWrite(int pin, int value)

Writes a value to a digital pin. value can be either HIGH or LOW.

int analogRead(int pin)

Reads the value from an analog pin. The return value is between 0 and 1023.

void analogWrite(int pin, int value)

Writes an analog value to a pin. value is between 0 and 255.

void Serial.begin(long speed)

Tells the Arduino to start sending and receiving serial data at *speed* bits per second. You usually set *speed* to 9600.

void Serial.println(val)

Prints data to the serial port. val can be any data type.

void delay(long interval)

Pauses the program for interval milliseconds.

Arduino

The finished product

You'll know your Arduino project is complete when you put the moisture sensor in your plant's soil, connect the Arduino to your computer, and start getting status updates about your plant.



If you have a Mac and want to make your plant really talk, you can download a script from the Head First Labs website that will read out the stream of serial data:

www.headfirstlabs.com/books/hfc




5 structs, unions, and bitfields





* Roll your own structures





Most things in life are more complex than a simple number.

So far, you've looked at the basic data types of the C language, but what if you want to go beyond numbers and pieces of text, and model things in the real world? structs allow you to model real-world complexities by writing your own structures. In this chapter, you'll learn how to combine the basic data types into structs, and even handle life's uncertainties with unions. And if you're after a simple yes or no, bitfields may be just what you need.

Sometimes you need to hand around a lot of data

You've seen that C can handle a lot of different types of data: small numbers and large numbers, floating-point numbers, characters, and text. But quite often, when you are recording data about something in the real world, you'll find that you need to use more than one piece of data. Take a look at this example. Here you have two functions that *both* need the same set of data, because they are both dealing with the same real-world *thing*:



```
"const char *" just means you're
                                                           , going to pass string literals.
            /* Print out the catalog entry */
            void catalog(const char *name, const char *species, int teeth, int age)
Both
               printf("%s is a %s with %i teeth. He is %i\n",
of these
                 name, species, teeth, age);
functions
take the
same set of
parameters.
            /* Print the label for the tank */

ightarrowvoid label(const char *name, const char *species, int teeth, int age)
               printf("Name:%s\nSpecies:%s\n%i years old, %i teeth\n",
                 name, species, teeth, age);
            }
```

Now that's not really so bad, is it? But even though you're just passing four pieces of data, the code's starting to look a little messy:

```
int main()

You are


Passing the catalog("Snappy", "Piranha", 69, 4);

same four

pieces of return 0;

data twice.

There's only one fish, but you're passing four pieces of data.
```



So how do you get around this problem? What can you do to avoid passing around lots and lots of data if you're really only using it to describe a single thing?

Cubicle conversation

I don't really see the problem. It's only **four** pieces of data.

Joe: Sure, it's four pieces of data *now*, but what if we change the system to record another piece of data for the fish?

Frank: That's only *one more parameter*.

Jill: Yes, it's just one piece of data, but we'll have to add that to *every function* that needs data about a fish.

Joe: Yeah, for a big system, that might be *hundreds* of functions. And all because we add *one more piece of data*.

Frank: That's a good point. But how do we get around it?

Joe: Easy, we just group the data into a *single thing*. Something like an array.

Jill: I'm not sure that would work. Arrays normally store a list of data of the *same type*.

Joe: Good point.

Frank: I see. We're recording strings and ints. Yeah, we can't put those into the same array.

Jill: I don't think we can.

Joe: But come on, there must be some way of doing this in C. Let's think about what we need.

Frank: OK, we want something that lets us refer to a whole set of data of different types all at once, as if it were a single piece of data

Jill: I don't think we've seen anything like that yet, have we?




What you need is something that will let you record several pieces of data into one large piece of data.

Create your own structured data types with a struct

If you have a set of data that you need to bundle together into a single thing, then you can use a struct. The word struct is short for structured data type. A struct will let you take all of those different pieces of data into the code and wrap them up into one large new data type, like this:

```
struct fish {
  const char *name;
  const char *species;
  int teeth:
  int age;
};
```

This will create a new custom data type that is made up of a collection of other pieces of data. In fact, it's a little bit like an array, except:

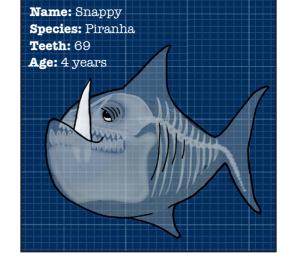


- It's fixed length.

The pieces of data inside the struct are given names.

But once you've defined what your new struct looks like, how do you create pieces of data that use it? Well, it's quite similar to creating a new array. You just need to make sure the individual pieces of data are in the order that they are defined in the struct:

```
"struct fish" is the data type. struct fish snappy = {"Snappy", "Piranha", 69, 4}; This is Snappy's age.
  "snappy" is the variable name
```



Dumb Questions

Hey, wait a minute. What's that const char thing again?

 A : const char \star is used for strings that you don't want to change. That means it's often used to record string literals.

OK. So does this struct store the string?

A: In this case, no. The struct here just stores a pointer to a string. That means it's just recording an address, and the string lives somewhere else in memory.

But you can store the whole string in there if you want?

A: Yes, if you define a char array in the string, like char name [20];.

220

Just give them the fish

Now, instead of having to pass around a whole collection of individual pieces of data to the functions, you can just pass your new custom piece of data:

```
/* Print out the catalog entry */
void catalog(struct fish f)
{
    ...
}
/* Print the label for the tank */
void label(struct fish f)
{
    ...
}
```

Looks a lot simpler, doesn't it? Not only does it mean the functions now only need a *single piece of data*, but the code that calls them is easier to read:

```
struct fish snappy = {"Snappy", "Piranha", 69, 4};
catalog(snappy);
label(snappy);
```

So that's how you can define your custom data type, but how do you *use* it? How will our functions be able to read the individual pieces of data stored inside the struct?

Wrapping parameters in a struct makes your code more stable.





Why the fish is good for you

One of the great things about data passing around

inside structs is that you can change the contents of your struct without having to change the functions that use it. For example, let's say you want to add an extra field to fish:

```
struct fish {
   const char *name;
   const char *species;
   int teeth;
   int age;
   int favorite_music;
};
```

All the catalog() and label() functions have been told is they they're going to be handed a fish. They don't know (and don't care) that the fish now contains more data, so long as it has all the fields they need.

That means that structs don't just make your code easier to read, they also make it better able to cope with change.

Read a struct's fields with the "." operator

Because a struct's a little like an array, you might think you can read its fields like an array:

But you can't. Even though a struct stores fields like an array, the only way to access them is **by name**. You can do this using the "." operator. If you've used another language, like JavaScript or Ruby, this will look familiar:

```
struct fish snappy = {"Snappy", "piranha", 69, 4};

printf("Name = %s\n", snappy.name);

This is the name attribute in snappy.


File Edit Window Help Fish
> gcc fish.c -o fish
> ./fish
Name = Snappy
> string "Snappy."
```

OK, now that you know a few things about using structs, let's see if you can go back and update that code...

222 Chapter 5

Pîranha Puzzle


Your job is to write a new version of the catalog () function using the fish struct. Take fragments of code from the pool and place them in the blank lines below. You may not use the same fragment more than once, and you won't need to use all the fragments.

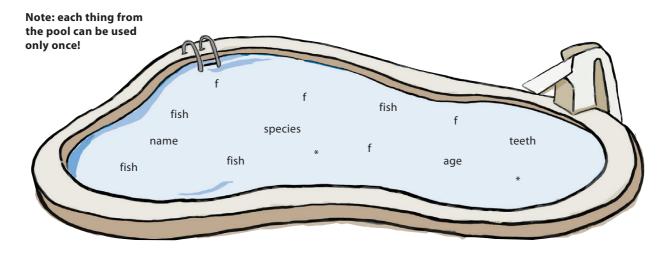

piranha unpuzzled

Piranha
Puzzle Soluțion

Your job was to write a new version of the catalog() function using the fish struct. You were to take fragments of code from the pool and place them in the blank lines below.

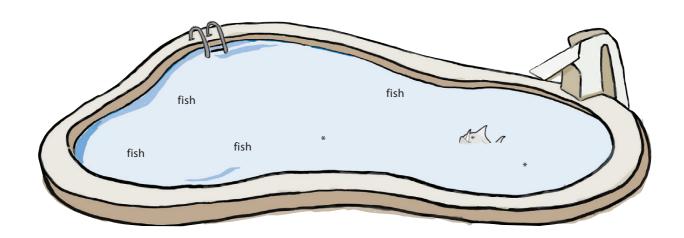



You've rewritten the catalog() function, so it's pretty easy to rewrite the label() function as well. Once you've done that, you can compile the program and check that it still works:

```
they, look, someone's using make...

This line is printed out the catalog() function. These lines are printed to by the label() function.

These lines are printed to by the label() function.

These lines are printed to by the label() function.

These lines are printed to by the label() function.

These lines are printed to by the label() function.
```

That's great. The code works the same as it did before, but now you have really simple lines of code that call the two functions:

```
catalog(snappy);
label(snappy);
```

Not only is the code more readable, but if you ever decide to record some extra data in the struct, you won't have to change anything in the functions that use it.

Dumb Questions

Q: So is a struct just an array?

A: No, but *like* an array, it groups a number of pieces of data together.

An array variable is just a pointer to the array. Is a struct variable a pointer to a struct?

A:No, a struct variable is a name for the struct itself.

I know I don't have to, but could I use [0], [1],... to access the fields of a struct?

 $oldsymbol{A}$:No, you can only access fields by name.

• Are structs like classes in other languages?

A:They're similar, but it's not so easy to add methods to structs.



Structs In Memory Up Close

When you define a struct, you're not telling the computer to create anything in memory. You're just giving it a **template** for how you want a new type of data to look.


```
struct fish {
  const char *name;
  const char *species;
  int teeth;
  int age;
};
```

But when you define a new variable, the computer will need to create some space in memory for an **instance** of the struct. That space in memory will need to be big enough to contain all of the fields within the struct:




The assignment copies the pointers to strings, not the strings themselves.

When you assign one struct to another, the contents of the struct will be copied. But if, as here, that includes pointers, the assignment will just copy the pointer values. That means the name and species fields of gnasher and snappy both point to the same strings.

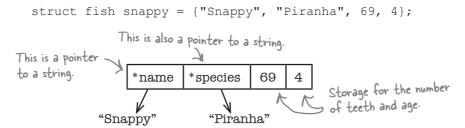

So what do you think happens when you assign a struct to another variable? Well, the computer will create a **brand-new copy of the struct**. That means it will need to allocate another piece of memory of the same size, and then copy over each of the fields.

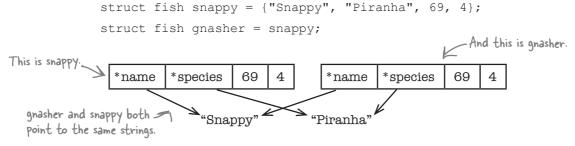

Remember: when you're assigning struct variables, you are telling the computer to copy data.

Can you put one struct inside another?

Remember that when you define a struct, you're actually creating a *new data type*. C gives us lots of built-in data types like ints and shorts, but a struct lets us combine existing types together so that you can describe *more complex objects* to the computer.

But if a struct creates a data type from existing data types, that means you can also **create structs from other structs**. To see how this works, let's look at an example.

```
struct preferences { These are things our fish likes.

const char *food;

float exercise_hours;
};

struct fish {

const char *name;

const char *species;

int teeth;

int age;

This is a struct inside a struct.

This is a new field. Struct preferences care; This is called nesting.

};

Our new field is called "care," but it will contain

fields defined by the "preferences" struct.
```

Why nest structs?

Why would you want to do this? So you can cope with complexity. structs give us bigger building blocks of data. By combining structs together, you can create larger and larger data structures. You might have to begin with just ints and shorts, but with structs, you can describe hugely complex things, like network streams or video images.

This code tells the computer one struct will contain another struct. You can then create variables using the same array-like code as before, but now you can include the data for one struct *inside another*:

```
This is the struct data for the care field.
```

```
struct fish snappy = {"Snappy", "Piranha", 69, 4, {"Meat", 7.5}};

Once you've combined structs together, you can access the fields using a chain of "." operators:

This is the value for care food.

This is the value for care food.
```

```
printf("Snappy likes to eat %s", snappy.care.food);
printf("Snappy likes to exercise for %f hours", snappy.care.exercise_hours);
```

OK, let's try out your new struct skillz...

LONG Exercise

The guys at the Head First Aquarium are starting to record lots of data about each of their fish guests. Here are their structs:

```
struct exercise {
 const char *description;
  float duration;
};
struct meal {
  const char *ingredients;
  float weight;
} ;
struct preferences {
  struct meal food;
  struct exercise exercise;
};
struct fish {
  const char *name;
  const char *species;
  int teeth;
  int age;
  struct preferences care;
} ;
```

This is the data that will be recorded for one of the fish:

```
Name: Snappy
Species: Piranha
Food ingredients: meat
Food weight: 0.2 lbs
Exercise description: swim in the jacuzzi
Exercise duration 7.5 hours
```

Question 0: How would you write this data in C?

```
struct fish snappy = _____
```

Question 1: Complete the code of the label() function so it produces output like this:



The guys at the Head First Aquarium are starting to record lots of data about each of their fish guests. Here are their structs:

```
struct exercise {
 const char *description;
  float duration;
};
struct meal {
  const char *ingredients;
  float weight;
} ;
struct preferences {
 struct meal food;
  struct exercise exercise;
};
struct fish {
  const char *name;
  const char *species;
  int teeth;
  int age;
  struct preferences care;
} ;
```

This is the data that will be recorded for one of the fish:

```
Name: Snappy
Species: Piranha
Food ingredients: meat
Food weight: 0.2 lbs
Exercise description: swim in the jacuzzi
Exercise duration 7.5 hours
```

Question 0: How would you write this data in C?

```
struct fish snappy = {"Snappy", "Piranha", 69, 4, {{"meat", 0.2}, {"swim in the jacuzzi", 7.5}}};
```

Question 1: Complete the code of the label() function so it produces output like this:

Hmmm...all these struct commands seem kind of wordy. I have to use the struct keyword when I define a struct, and then I have to use it again when I define a variable. I wonder if there's some way of simplifying this.

You can give your struct a proper name using typedef.

When you create variables for built-in data types, you can use simple short names like int or double, but so far, every time you've created a variable containing a struct you've had to include the struct keyword.

```
struct cell_phone {
  int cell_no;
  const char *wallpaper;
  float minutes_of_charge;
};
...
struct cell_phone p = {5557879, "sinatra.png", 1.35};
```

But C allows you to create an **alias** for any struct that you create. If you add the word **typedef** *before* the struct keyword, and a **type name** *after* the closing brace, you can call the new type whatever you like:

```
typedef
means you typedef struct cell_phone {
to give
             int cell no;
the struct
             const char *wallpaper;
type a new
              float minutes of charge;
name.
           } phone; Phone will become an alias for
                          "struct cell_phone.
        phone p = {5557879, "sinatra.png", 1.35};
     Now, when the compiler sees "phone," it will
      treat it like "struct cell_phone."
                                                        This is
       typedefs can shorten your code and make it
                                                        the alias.
       easier to read. Let's see what your code will look
```

What should I call my new type?

If you use typedef to create an alias for a struct, you will need to decide what your alias will be. The alias is just the name of your type. That means there are two names to think about: the name of the struct (struct cell_phone) and the name of the type (phone). Why have two names? You usually don't need both. The compiler is quite happy for you to skip the struct name, like this:

```
typedef struct {
  int cell_no;
  const char *wallpaper;
  float minutes_of_charge;
} phone;
phone p = {5557879, "s.png", 1.35};
```

like if you start to add typedefs to it...



It's time for the scuba diver to make his daily round of the tanks, and he needs a new label on his suit. Trouble is, it looks like some of the code has gone missing. Can you work out what the missing words are?

```
#include <stdio.h>
 .....struct {
 float tank capacity;
 int tank psi;
 const char *suit_material;
} .....;
 .....struct scuba {
 const char *name;
 equipment kit;
} diver;
void badge ( d)
 printf("Name: %s Tank: %2.2f(%i) Suit: %s\n",
   d.name, d.kit.tank_capacity, d.kit.tank_psi, d.kit.suit_material);
int main()
 ..... randy = {"Randy", {5.5, 3500, "Neoprene"}};
 badge(randy);
 return 0;
```



Solution

It's time for the scuba diver to make his daily round of the tanks, and he needs a new label on his suit. Trouble is, it looks like some of the code has gone missing. Could you work out what the missing words were?

```
#include <stdio.h>
 typedef struct {
  float tank capacity;
  int tank psi;
  const char *suit_material;
} equipment ;
 typedef struct scuba {
  const char *name;
equipment kit; The coder decided to give the struct the name scuba" here. But you'll just use the diver type name.
void badge ( diver d)
  printf("Name: %s Tank: %2.2f(%i) Suit: %s\n",
    d.name, d.kit.tank capacity, d.kit.tank psi, d.kit.suit material);
int main()
 diver randy = {"Randy", {5.5, 3500, "Neoprene"}};
 badge (randy);
  return 0;
```



BULLET POINTS

- A struct is a data type made from a sequence of other data types.
- structs are fixed length.
- struct fields are accessed by name, using the <struct>.<field name> syntax (aka dot notation).
- struct fields are stored in memory in the same order they appear in the code.
- You can nest structs.
- typedef creates an alias for a data type.
- If you use typedef with a struct, then you can skip giving the struct a name.

there are no **Dumb Questions**

O: Do struct fields get placed next to each other in memory?

A: Sometimes there are small gaps between the fields.

Q: Why's that?

The computer likes data to fit inside word boundaries. So if a computer uses 32-bit words, it won't want a short, say, to be split over a 32-bit boundary.

So it would leave a gap and start the short in the next 32-bit word?

A: Yes.

Does that mean each field takes up a whole word?

A: No. The computer leaves gaps only to prevent fields from splitting across word boundaries. If it can fit several fields into a single word, it will.

Why does the computer care so much about word boundaries?

A: It will read complete words from the memory. If a field was split across more than one word, the CPU would have to read several locations and somehow stitch the value together.

Q: And that'd be slow?

A: That'd be slow.

In languages like Java, if I assign an object to a variable, it doesn't copy the object, it just copies a reference. Why is it different in C?

A: In C, all assignments copy data. If you want to copy a reference to a piece of data, you should assign a pointer.

I'm really confused about struct names. What's the struct name and what's the alias?

A: The struct name is the word that follows the struct keyword. If you write struct peter_parker { . . . }, then the name is peter_parker, and when you create variables, you would say struct peter parker x.

Q: And the alias?

A: Sometimes you don't want to keep using the struct keyword when you declare variables, so typedef allows you to create a single word alias. In typedef struct peter_parker { . . . } spider_man; spider_man is the alias.

So what's an anonymous struct?

A: One without a name. So typedef struct { . . . } spider_man; has an alias of spider_man, but no name. Most of the time, if you create an alias, you don't need a name.

How do you update a struct?

A struct is really just a bundle of variables, grouped together and treated like a single piece of data. You've already seen how to create a struct object, and how to access its values using dot notation. But how do you *change* the value of a struct that already exists? Well, you can change the fields just like any other variable:

```
This creates a struct. If ish snappy = {"Snappy", "piranha", 69, 4};

This sets the value of printf("Hello %s\n", snappy.name); This reads the value of the name field. It is snappy teeth = 68; Ouch! Looks like Snappy bit something hard.
```

That means if you look at this piece of code, you should be able to work out what it does, right?

Myrtle the turtle



But there's something odd about this code...



This is what happens when you compile and run the code.

```
File Edit Window Help ILikeTurtles

> gcc turtle.c -o turtle && ./turtle

Happy Birthday Myrtle! You are now 100 years old!

Myrtle's age is now 99

>

Wicked

Turtle

Feet
```

Something weird has happened.

The code creates a new struct and then passes it to a function that was *supposed* to increase the value of one of the fields by 1. And *that's exactly what the code did...* at least, for a while.

Inside the happy_birthday() function, the age field was updated, and you know that it worked because the printf() function displayed the new increased age value. But that's when the weird thing happened. Even though the age was updated by the function, when the code returned to the main() function, the age seemed to reset itself.



This code is doing something weird. But you've already been given enough information to tell you exactly **what** happened. Can you work out what it is?

The code is cloning the turtle

Let's take a closer look at the code that called the happy birthday() function:

```
void happy_birthday(turtle t)
{
    ...
}
    This is the turtle that we are passing to the function.
happy_birthday(myrtle);
```

When you assign a struct, its values get copied to the new struct.

In C, parameters are passed to functions **by value**. That means that when you call a function, the values you pass into it are *assigned* to the parameters. So in this code, it's almost as if you had written something like this:

turtle t = myrtle;

But remember: when you assign structs in C, the values are copied. When you call the function, the parameter t will contain a *copy* of the myrtle struct. It's as if the function *has a clone of the original turtle*. So the code inside the function *does* update the age of the turtle, **but it's a different turtle**.

What happens when the function returns? The t parameter disappears, and the rest of the code in main() uses the myrtle struct. But the value of myrtle was never changed by the code. It was always a completely separate piece of data.

So what do you do if you want pass a struct to a function that needs to update it?



The myrtle struct will be copied to this parameter.



You need a pointer to the struct

When you passed a variable to the scanf() function, you couldn't pass the variable itself to scanf(); you had to pass a **pointer**:

```
scanf("%f", &length of run);
```


Why did you do that? Because if you tell the scanf() function where the variable lives in memory, then the function will be able to update the data stored at that place in memory, which means it can update the variable.

And you can do just the same with structs. If you want a function to update a struct variable, you can't just pass the struct as a parameter because that will simply send a *copy* of the data to the function. Instead, you can pass the address of the struct:

Sharpen your pencil


See if you can figure out what *expression* needs to fit into each of the gaps in this new version of the happy_birthday() function.

Be careful. Don't forget that \ensuremath{t} is now a pointer variable.

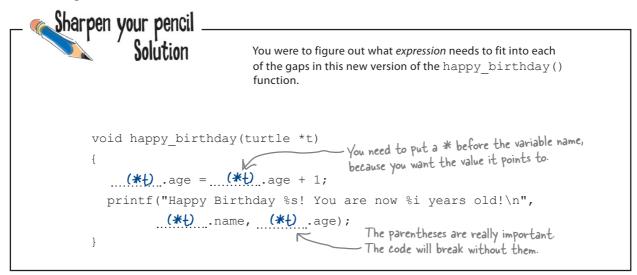

(*t).age vs. *t.age

So why did you need to make sure that *t was wrapped in parentheses? It's because the two expressions, (*t).age and *t.age, are very different.

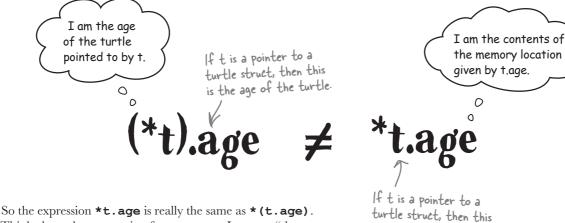

Think about that expression for a moment. It means "the contents of the memory location given by t.age." But t.age isn't a memory location.

So be careful with your parentheses when using structs—parentheses really matter.

expression is wrong.



Let's check if you got around the bug:

```
File Edit Window Help | LikeTurtles

> gcc happy_birthday_turtle_works.c -o happy_birthday_turtle_works
Happy Birthday Myrtle! You are now 100 years old!

Myrtle's age is now 100

>
```

0

That's great. The function now works.

By passing a pointer to the struct, you allowed the function to update the *original data* rather than taking a local copy.

I can see how the new code works. But the stuff about parentheses and * notation doesn't make the code all that readable. I wonder if there's something that would help with that.

Yes, there is another struct pointer notation that is more readable.

Because you need to be careful to use parentheses in the right way when you're dealing with pointers, the inventors of the C language came up with a simpler and easier-to-read piece of syntax. These two expressions mean the same thing:




So, t->age means, "The age field in the struct that t points to," That means you can also write the function like this:

t->age means (*t).age



Safe Cracker


Shhh...it's late at night in the bank vault. Can you spin the correct combination to crack the safe? Study these pieces of code and then see if you can find the correct combination that will allow you to get to the gold. Be careful! There's a swag type and a swag field.

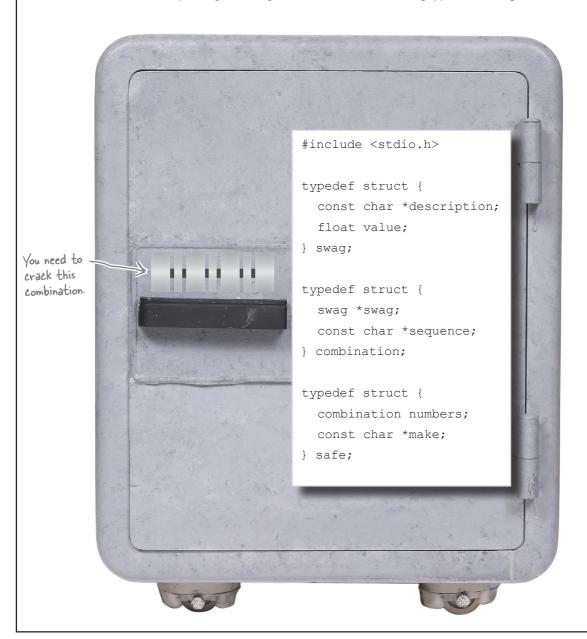

The bank created its safe like this:

```
swag gold = {"GOLD!", 1000000.0};
combination numbers = {&gold, "6502"};
safe s = {numbers, "RAMACON250"};
```

What combination will get you to the string "GOLD!"? Select one symbol or word from each column to assemble the expression.

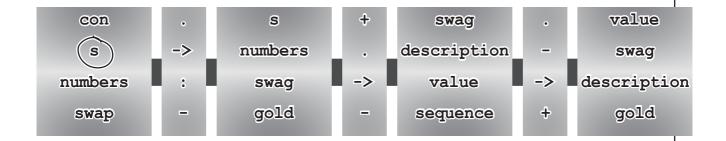

there are no **Dumb Questions**

Q: Why are values copied to parameter variables?

A: The computer will pass values to a function by assigning values to the function's parameters. And all assignments copy values.


Why isn't *t.age just read as (*t).age?

A: Because the computer evaluates the dot operator before it evaluates the *



Safe Cracker Solution


Shhh...it's late at night in the bank vault. You were to spin the correct combination to crack the safe. You needed to study these pieces of code and then find the correct combination that would allow you to get to the gold.

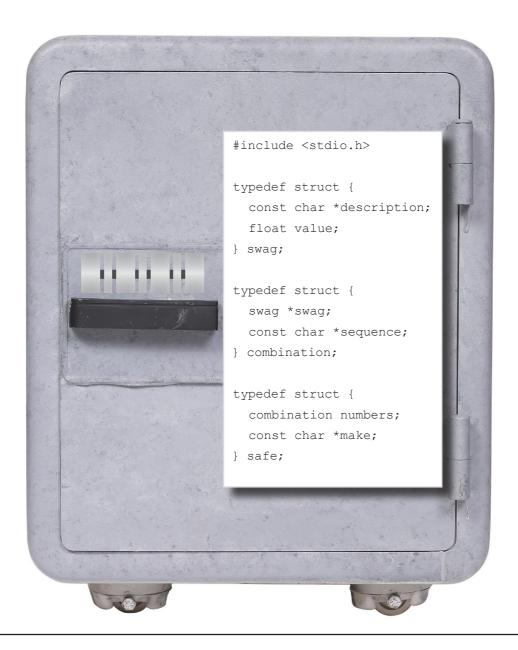

The bank created its safe like this:

```
swag gold = {"GOLD!", 1000000.0};
combination numbers = {&gold, "6502"};
safe s = {numbers, "RAMACON250"};
```

What combination will get you to the string "GOLD!"? You were to select one symbol or word from each column to assemble the expression.

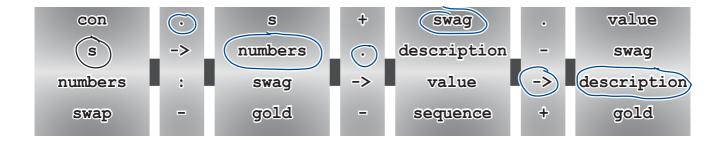

So you can display the gold in the safe with:

printf("Contents = %s\n", s.numbers.swag->description);



RULLET POINTS

- When you call a function, the values are *copied* to the parameter variables.
- You can create pointers to structs, just like any other type.
- pointer->field is the same as (*pointer).field.
- The -> notation cuts down on parentheses and makes the code more readable.

Sometimes the same type of thing needs different types of data

structs enable you to model more complex things from the real world. But there are pieces of data that don't have a single data type:



So if you want to record, say, a *quantity* of something, and that quantity might be a **count**, a **weight**, or a **volume**, how would you do that? Well, you *could* create several fields with a struct, like this:

```
typedef struct {
    ...
    short count;
    float weight;
    float volume;
    ...
} fruit;
```

But there are a few reasons why this is not a good idea:

- It will take up more space in memory.
- Someone might set more than one value.
- There's nothing called "quantity."


It would be *really useful* if you could specify something called quantity in a data type and then decide for each particular piece of data whether you are going to record a count, a weight, or a volume against it.

In C, you can do just that by using a union.


246 Chapter 5

A union lets you reuse memory space

Every time you create an instance of a struct, the computer will lay out the fields in memory, one after the other:

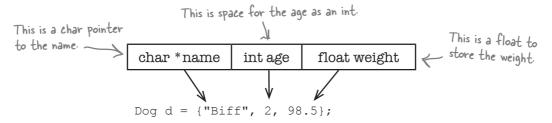

A union is different. A union will use the space for just one of the fields in its definition. So, if you have a union called quantity, with fields called count, weight, and volume, the computer will give the union enough space for its largest field, and then leave it up to you which value you will store in there. Whether you set the count, weight, or volume field, the data will go into the same space in memory:

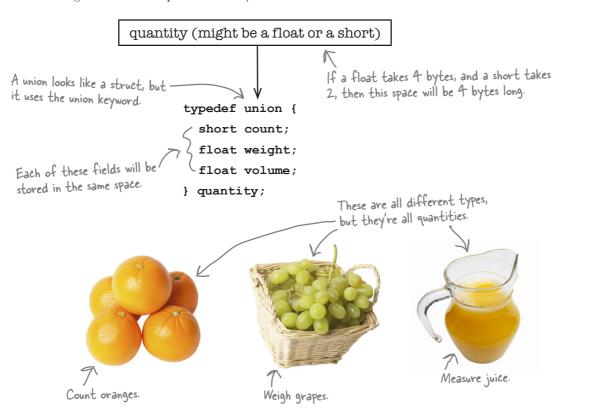

How do you use a union?

When you declare a union variable, there are a few ways of setting its value.

C89 style for the first field

If the union is going to store a value for the **first field**, then you can use C89 notation. To give the union a value for its first field, just wrap the value in braces:

quantity
$$q = \{4\}$$
; This means the quantity is a count of 4.

Pesignated initializers set other values

A **designated initializer** sets a union field value by **name**, like this:

Set the value with dot notation

The third way of setting a union value is by creating the variable on one line, and setting a field value on another line:

```
quantity q;
q.volume = 3.7;
```

Remember: whichever way you set the union's value, there will only ever be **one piece of data stored**. The union just gives you a way of creating a variable that supports **several different data types**.

there are no Dumb Questions

Why is a union always set to the size of the largest field?

A: The computer needs to make sure that a union is always the same size. The only way it can do that is by making sure it is large enough to contain any of the fields.

Why does the C89 notation only set the first field? Why not set it to the first float if I pass it a float value?

A: To avoid ambiguity. If you had, say, a float and a double field, should the computer store {2.1} as a float or a double? By always storing the value in the first field, you know exactly how the data will be initialized.



The Polite Guide to Standards

Designated initializers allow you to set struct and union fields by name and are part of the C99 C standard. They are supported by most modern compilers, but be careful if you are using some variant of the C language. For example, Objective C supports designated initializers, but C++ does not.

Those designated initializers look like they could be useful for structs as well. I wonder if I can use them there.

Yes, designated initializers can be used to set the initial values of fields in structs as well.

They can be very useful if you have a struct that contains a large number of fields and you initially just want to set a few of them. It's also a good way of making your code more readable:

```
typedef struct {
  const char *color;
  int gears;
  int height;
} bike;

the will set the gears and
  the height fields, but won't
  set the color field.

bike;

bike b = {.height=17, .gears=21};
```



unions are often used with structs

Once you've created a union, you've created a *new data type*. That means you can use its values anywhere you would use another data type like an int or a struct. For example, you can combine them with structs:

```
typedef struct {
  const char *name;
  const char *country;
  quantity amount;
} fruit_order;
```

And you can access the values in the struct/union combination using the dot or -> notation you used before:

```
It's amount because that's the name of the struct quantity variable.
```

```
Here, you're using a double designated identifier.
.amount for the struct and
.weight for the .amount.
```



Mixed-UP Mixers

It's Margarita Night at the Head First Lounge, but after one too many samples, it looks like the guys have mixed up their recipes. See if you can find the matching code fragments for the different margarita mixes.

Here are the basic ingredients:

```
typedef union {
  float lemon;
  int lime_pieces;
} lemon_lime;

typedef struct {
  float tequila;
  float cointreau;
  lemon_lime citrus;
} margarita;
```

Here are the different margaritas:

```
margarita m = {2.0, 1.0, {0.5}};
```

```
margarita m = {2.0, 1.0, .citrus.lemon=2};
```

```
margarita m = {2.0, 1.0, 0.5};
```

```
margarita m = {2.0, 1.0, {.lime_pieces=1}};
```

```
margarita m = {2.0, 1.0, {1}};
```

```
margarita m = {2.0, 1.0, {2}};
```

And finally, here are the different mixes and the drink recipes they produce. Which of the margaritas need to be added to these pieces of code to generate the correct recipes?

printf("%2.1f measures of tequila\n%2.1f measures of cointreau\n%2.1f measures of juice\n", m.tequila, m.cointreau, m.citrus.lemon); 2.0 measures of tequila 1.0 measures of cointreau 2.0 measures of juice

```
printf("%2.1f measures of tequila\n%2.1f measures of cointreau\n%2.1f
   measures of juice\n", m.tequila, m.cointreau, m.citrus.lemon);
```

- 2.0 measures of tequila
- 1.0 measures of cointreau
- 0.5 measures of juice

```
printf("%2.1f measures of tequila\n%2.1f measures of cointreau\n%i pieces
   of lime\n", m.tequila, m.cointreau, m.citrus.lime pieces);
```

- 2.0 measures of tequila
- 1.0 measures of cointreau
- 1 pieces of lime

BE the Compiler One of these pieces of code compiles: the other doesn't. Your job is to play like you're the compiler and say which one compiles, and why the other one doesn't.

```
margarita m = \{2.0, 1.0, \{0.5\}\};
```

```
margarita m;
m = \{2.0, 1.0, \{0.5\}\};
```



Mixed-UP Mixers Solution

It's Margarita Night at the Head First Lounge, but after one too many samples, it looks like the guys have mixed up their recipes. You were to find the matching code fragments for the different margarita mixes.

Here are the basic ingredients:

```
typedef union {
  float lemon;
  int lime_pieces;
} lemon_lime;

typedef struct {
  float tequila;
  float cointreau;
  lemon_lime citrus;
} margarita;
```

Here are the different margaritas:

```
margarita m = {2.0, 1.0, .citrus.lemon=2};

margarita m = {2.0, 1.0, 0.5};

None of these lines was used.

margarita m = {2.0, 1.0, {1}};
```

And finally, here are the different mixes and the drink recipes they produce. Which of the margaritas need to be added to these pieces of code to generate the correct recipes?

margarita $m = \{2.0, 1.0, \{2\}\};$

printf("%2.1f measures of tequila\n%2.1f measures of cointreau\n%2.1f
 measures of juice\n", m.tequila, m.cointreau, m.citrus.lemon);

- 2.0 measures of tequila
- 1.0 measures of cointreau
- 2.0 measures of juice

margarita $m = \{2.0, 1.0, \{0.5\}\};$

printf("%2.1f measures of tequila\n%2.1f measures of cointreau\n%2.1f measures of juice\n", m.tequila, m.cointreau, m.citrus.lemon);

- 2.0 measures of tequila
- 1.0 measures of cointreau
- 0.5 measures of juice

margarita m = {2.0, 1.0, {.lime_pieces=1}};

printf("%2.1f measures of tequila\n%2.1f measures of cointreau\n%i pieces
 of lime\n", m.tequila, m.cointreau, m.citrus.lime_pieces);

- 2.0 measures of tequila
- 1.0 measures of cointreau
- 1 pieces of lime

BE the Compiler Solution

One of these pieces of code compiles; the other doesn't. Your job is to play like you're the compiler and say which one

compiles, and why the other one doesn't.

margarita $m = \{2.0, 1.0, \{0.5\}\};$

This one compiles perfectly. It's actually just one of the drinks above!

margarita m;

 $m = \{2.0, 1.0, \{0.5\}\};$

This one doesn't compile because the compiler will only know that {2.0, 1.0, {0.5}} represents a struct if it's used on the same line that a struct is declared. When it's on a separate line, the compiler thinks it's an array.

you are here

Hey, wait a minute... You're setting all these different values with all these different types and you're storing them in the same place in memory... How do I know if I stored a float in there once I've stored it? What's to stop me from reading it as a short or something??? Hello?

That's a really good point: you can store lots of possible values in a union, but you have *no way* of knowing what type it was once it's stored.

The compiler won't be able to keep track of the fields that are set and read in a union, so there's nothing to stop us setting one field and reading another. Is that a problem? Sometimes it can be a **BIG PROBLEM**.

```
#include <stdio.h>
   typedef union {
      float weight;
      int count;
   } cupcake;
                   By mistake, the
                   programmer has set the
                   weight, not the count.
   int main()
                                          She set the weight, but
                                          she's reading the count
      cupcake order = {2};
                                                                               This is what the program did.
      printf("Cupcakes quantity: %i\n", order.count);
      return 0;
                                          File Edit Window Help
                                           > gcc badunion.c -o badunion && ./badunion
                                           Cupcakes quantity: 1073741824
               That's a lot of cupcakes ... .
You need some way, then, of keeping track of the
values we've stored in a union. One trick that some C
coders use is to create an enum.
```


254 Chapter 5

An enum variable stores a symbol

Sometimes you don't want to store a number or a piece of text. Instead, you want to store something from a list of **symbols**. If you want to record a day of the week, you only want to store MONDAY, TUESDAY, WEDNESDAY, etc. You don't need to store the text, because there are only ever going to be seven different values to choose from.

That's why enums were invented.

enum lets you create a list of symbols, like this:



Any variable that is defined with a type of **enum colors** can then only be set to one of the keywords in the list. So you might define an enum colors variable like this:

enum colors favorite = PUCE;

Under the covers, the computer will just assign numbers to each of the symbols in your list, and the enum will just store a number. But you don't need to worry about what the numbers are; your C code can just refer to the symbols. That'll make your code easier to read, and it will prevent storing values like REB or PUSE:





So that's how enums work, but how do they help you keep track of unions? Let's look at an example...






Code Magnets

Because you can create new data types with enums, you can store them inside structs and unions. In this program, an enum is being used to track the kinds of quantities being stored. Do you think you can work out where the missing pieces of code go?

```
#include <stdio.h>
typedef enum {
  COUNT, POUNDS, PINTS
} unit of measure;
typedef union {
  short count;
  float weight;
 float volume;
} quantity;
typedef struct {
  const char *name;
  const char *country;
  quantity amount;
 unit of measure units;
} fruit order;
void display(fruit order order)
 printf("This order contains ");
 if (_____== PINTS)
   printf("%2.2f pints of %s\n", order.amount.______, order.name);
```

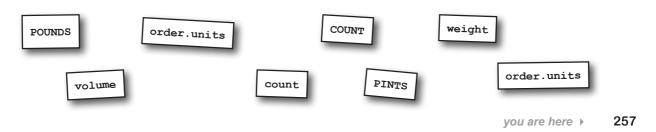



Code Magnets Solution

Because you can create new data types with enums, you can store them inside structs and unions. In this program, an enum is being used to track the kinds of quantities being stored. Were you able to work out where the missing pieces of code go?

```
#include <stdio.h>
typedef enum {
  COUNT, POUNDS, PINTS
} unit_of measure;
typedef union {
  short count;
  float weight;
  float volume;
} quantity;
typedef struct {
  const char *name;
  const char *country;
  quantity amount;
  unit of measure units;
} fruit order;
void display(fruit order order)
  printf("This order contains ");
        order.units == PINTS)
                                                  volume
    printf("%2.2f pints of %s\n", order.amount.
```

```
order.units
                                    POUNDS
  else if (
    printf("%2.2f lbs of %s\n", order.amount.weight, order.name);
  else
                                      count
    printf("%i %s\n", order.amount.
                                               ....., order.name);
int main()
                                                                   COUNT
  fruit order apples = {"apples", "England", .amount.count=144,
  fruit order strawberries = {"strawberries", "Spain", .amount.
                                                                  weight =17.6, POUNDS};
  fruit order oj = {"orange juice", "U.S.A.", .amount.volume=10.5, ....
                                                                         PINTS
  display(apples);
  display(strawberries);
  display(oj);
  return 0;
}
```

When you run the program, you get this:

```
File Edit Window Help

> gcc enumtest.c -o enumtest
This order contains 144 apples
This order contains 17.60 lbs of strawberries
This order contains 10.50 pints of orange juice
```

overheard



union: ...so I said to the code, "Hey, look. I don't care
if you gave me a float or not. You asked for an int.
You got an int."

struct: Dude, that was totally uncalled for.

union: That's what I said. It's totally uncalled for.

struct: Everyone knows you only have one storage location.

union: Exactly. Everything is one. I'm, like, Zen that

enum: What happened, dude?

struct: Shut up, enum. I mean, the guy was crossing

the fine.

union: I mean, if he had just left a record. You know, said, I stored this as an int. It just needed an enum or something.

enum: You want me to do what?

struct: Shut up, enum.

union: I mean, if he'd wanted to store several things at once, he should have called you, am I right?

struct: Order. That's what these people don't grasp.

enum: Ordering what?

struct: Separation and sequencing. I keep several things alongside each other. All at the same time, dude.

union: That's just my point.

struct: All. At. The. Same. Time.

enum: (Pause) So has there been a problem?

union: Please, enum? I mean these people just need to

make a decision. Wanna store several things, use you. But store just one thing with different possible types? Dude's your man.

struct: I'm calling him.

union: Hey, wait...

enum: Who's he calling, dude?
struct/union: Shut up, enum.

union: Look, let's not cause any more problems here.

struct: Hello? Could I speak to the Bluetooth service,

please?

union: Hey, let's just think about this.

struct: What do you mean, he'll give me a callback? **union**: I'm just. This doesn't seem like a good idea.

struct: No, let me leave you a message, my friend.

union: Please, just put the phone down.

enum: Who's on the phone, dude?

struct: Be quiet, enum. Can't you see I'm on the phone here? Listen, you just tell him that if he wants to store a float and an int, he needs to come see me. Or I'm going to come see him. Understand me? Hello? Hello?

union: Easy, man. Just try to keep calm.

struct: On hold? They put me on ^*&^ing hold!

union: They what? Pass me the phone... Oh...that... man. The Eagles! I hate the Eagles...


enum: So if you pack your fields, is that why you're so

struct: You are entering a world of pain, my friend.

260 Chapter 5

Sometimes you want control at the bit level

Let's say you need a struct that will contain a lot of yes/no values. You could create the struct with a series of shorts or ints:

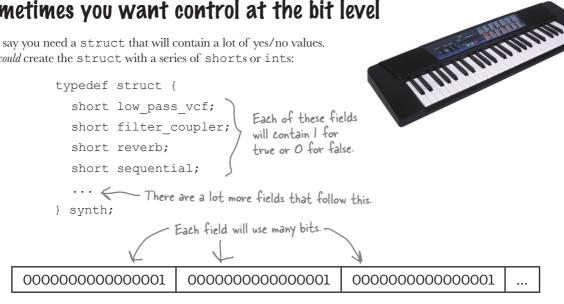

And that would work. The problem? The short fields will take up a lot more space than the *single bit* that you need for **true/false** values. It's wasteful. It would be much better if you could create a struct that could hold a sequence of single bits for the values.

That's why **bitfields** were created.





Geek Binary Digits

When you're dealing with binary value, it would be great if you had some way of specifying the 1s and 0s in a literal, like:

$$int x = 01010100;$$

Unfortunately, C doesn't support binary literals, but it does support hexadecimal literals. Every time C sees a number beginning with 0x, it treats the number as base 16:

as **pase 16**:

This is not decimal 54.

int
$$x = 0x54$$
;

But how do you convert back and forth between hexadecimal and binary? And is it any easier than converting binary and decimal? The good news is that you can convert hex to binary one digit at a

Each hexadecimal digit matches a binary digit of length 4. All you need to learn are the binary patterns for the numbers 0–15, and you will soon be able to convert binary to hex and back again in your head within seconds.

Bitfields store a custom number of bits

A bitfield lets you specify how many bits an individual field will store. For example, you could write your struct like this:

```
typedef struct {
                       unsigned int low pass vcf:1;
                       unsigned int filter_coupler:1; This means the field will
    Each field should
    be an unsigned int.
                       unsigned int reverb:1;
                       unsigned int sequential:1;
                     } synth;
By using bitfields, you can make sure
each field takes up only one bit.
                                 1
                                     1
```

If you have a sequence of bitfields, the computer can **squash them together** to save space. So if you have eight single-bit bitfields, the computer can store them in a single byte.



Bitfields can save space if they are collected together in a struct.

But if the compiler finds a single bitfield on its own, it might still have to pad it out to the size of a word. That's why bitfields are usually grouped together.

only use I bit of storage.

Let's see how how good you are at using bitfields.

How many bits do I need?

Bitfields can be used to store a sequence of true/false values, but they're also useful for other short-range values, like months of the year. If you want to store a month number in a struct, you know it will have a value of, say, 0-11. You can store those values in 4 bits. Why? Because 4 bits let you store 0–15, but 3 bits only store 0–7.

```
unsigned int month no:4;
```



Back at the Head First Aquarium, they're creating a customer satisfaction survey. Let's see if you can use bitfields to create a matching struct.



Aquarium Questionnaire

Is this your first visit?	
Will you come again?	
Number of fingers lost in the piranha tank:	
Did you lose a child in the shark exhibit?	
How many days a week would you visit if you could?	

```
typedef struct {

unsigned int first_visit:

unsigned int come_again:

unsigned int fingers_lost:

unsigned int shark_attack:

unsigned int days_a_week:

;

survey;
```



Back at the Head First Aquarium, they're creating a customer satisfaction survey. You were to use bitfields to create a matching struct.



Aquarium Questionnaire

Is this your first visit?	
Will you come again?	
Number of fingers lost in the piranha tank:	
Did you lose a child in the shark exhibit?	
How many days a week would you visit if you could?	

bumb Questions

Why doesn't C support binary literals?

A: Because they take up a lot of space, and it's usually more efficient to write hex values.

Why do I need 4 bits to store a value up to 10?

Four bits can store values from 0 to binary 1111, which is 15. But 3 bits can only store values up to binary 111, which is 7.

So what if I try to put the value 9 into a 3-bit field?

A: The computer will store a value of 1 in it, because 9 is 1001 in binary, so the computer transfers 001.

Are bitfields really just used to save space?

A: No. They're important if you need to read low-level binary information.

Q: Such as?

A: If you're reading or writing some sort of custom binary file.



BULLET POINTS

- A union allows you to store different data types in the same memory location.
- A designated initializer sets a field value by name.
- Designated initializers are part of the C99 standard. They are not supported in C++.
- If you declare a union with a value in {braces}, it will be stored with the type of the first field.
- The compiler will let you store one field in a union and read a completely different field. But be careful! This can cause bugs.
- enums store symbols.
- Bitfields allow you to store a field with a custom number of bits.
- Bitfields should be declared as unsigned int.

Your C Toolbox

You've got Chapter 5 under your belt, and now you've added structs, unions, and bitfields to your toolbox. For a complete list of tooltips in the book, see Appendix ii.

typedef lets you create an alias for a data type.

A struct combines data types together.

You can initialize structs with {array, like, notation}.

You can read struct fields with dot notation.

> -> notation lets you easily update fields using a struct pointer.

unions can hold different data types in one location. Designated initializers let you set struct and union fields by name.

enums let you create a set of symbols.

> Bitfields give you control over the exact bits stored in a struct.

6 data structures and dynamic memory





Sometimes, a single struct is simply not enough.

To model complex data requirements, you often need to **link structs together**. In this chapter, you'll see how to use **struct pointers** to connect custom data types into **large, complex data structures**. You'll explore *key principles* by creating **linked lists**. You'll also see how to make your data structures cope with flexible amounts of data by **dynamically allocating memory on the heap**, and freeing it up when you're done. And if good housekeeping becomes tricky, you'll also learn how **valgrind** can help.

Po you need flexible storage?


You've looked at the different kinds of data that you can store in C, and you've also seen how you can store multiple pieces of data in an array. But sometimes you need to be a little more flexible.

Imagine you're running a travel company that arranges flying tours through the islands. Each tour contains a sequence of short flights from one island to the next. For each of those islands, you will need to record a few pieces of information, such as the name of the island and the hours that its airport is open. So how would you record that?

You could create a struct to represent a single island:

```
typedef struct {
  char *name;
  char *opens;
  char *closes;
} island;
```

Now if a tour passes through a *sequence* of islands, that means you'll need to record a list of islands, and you can do that with an array of islands:

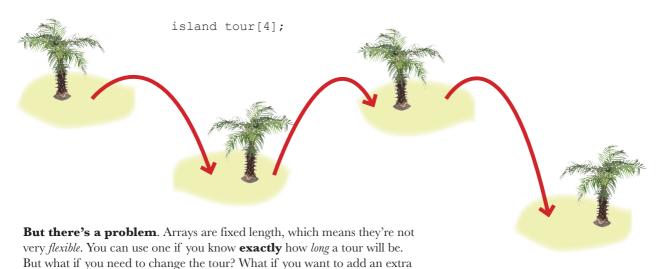

To store a flexible amount of data, you need something more extensible than an array. You need a *linked list*.

268 Chapter 6

destination to the middle of the tour?


islands.


C planes between the

Linked lists are like chains of data

A **linked list** is an example of an **abstract data structure**. It's called an *abstract* data structure because a linked list is *general*: it can be used to store a lot of different kinds of data.

To understand how a linked list works, think back to our tour company. A linked list stores a piece of data, and a link to *another* piece of data.

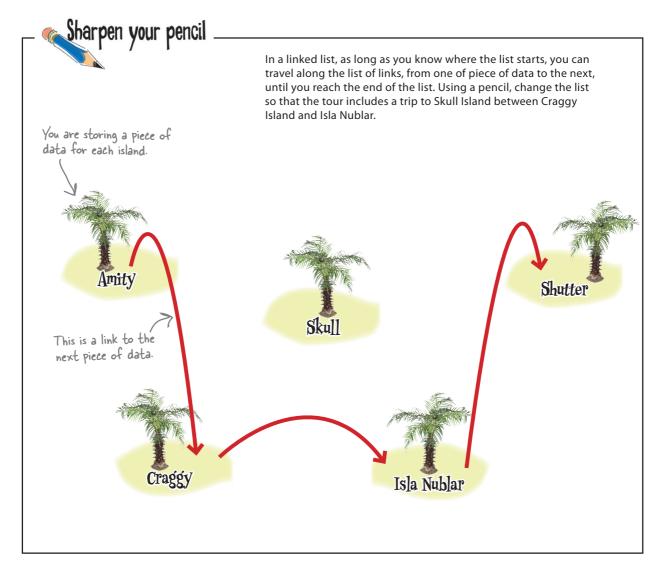


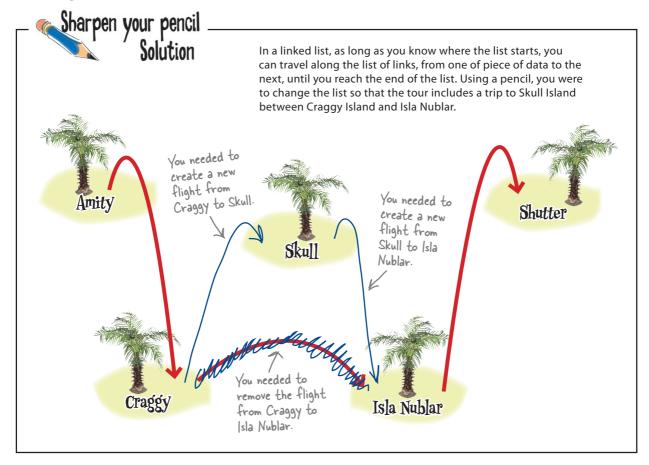

Linked lists allow inserts

With just a few changes, you were able to add an extra step to the tour. That's another advantage linked lists have over arrays: **inserting data is very quick**. If you wanted to insert a value into the middle of an *array*, you would have to shuffle all the pieces of data that follow it along by one:

If you wanted to insert an extra value after Craggy Island, you'd have to move the other values along one space.




But how do you create a linked list in C?


270 Chapter 6

Create a recursive structure

Each one of the structs in the list will need to connect to the one next to it. A struct that contains a link to another struct of the same type is called a **recursive structure**.

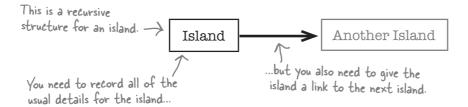


Recursive structures contain pointers to other structures of the same type. So if you have a flight schedule for the list of islands that you're going to visit, you can use a recursive structure for each island. Let's look at how that works in more detail:

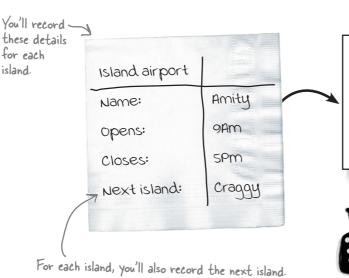

How do you store a link from one struct to the next? With a pointer. That way, the island data will contain the *address* of the next island that we're going to visit. So, whenever our code is at one island, it will always be able to hop over to the next island.

Let's write some code and start island hopping.

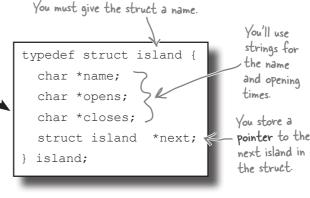

Recursive structures need names.

If you use the typedef command, you can normally skip giving the struct a proper

name. But in a recursive structure, you need to include a pointer to the same type. C syntax won't let you use the typedef alias, so you need to give the struct a proper name. That's why the struct here is called struct island.

Create islands in C...

Once you have defined an island data type, you can create the first set of islands like this:

This code will create island structs for each of the islands.

```
island amity = {"Amity", "09:00", "17:00", NULL};
island craggy = {"Craggy", "09:00", "17:00", NULL};
island isla_nublar = {"Isla Nublar", "09:00", "17:00", NULL};
island shutter = {"Shutter", "09:00", "17:00", NULL};
```



Did you notice that we originally set the next field in each island to NULL? In C, NULL actually has the value 0, but it's set aside specially to set *pointers* to 0.


...and link them together to form a tour

Once you've created each island, you can then connect them together:

```
amity.next = &craggy;
craggy.next = &isla_nublar;
isla nublar.next = &shutter;
```


You have to be careful to set the next field in each island to the *address* of the next island. You'll use struct variables for each of the islands.

So now you've created a complete island tour in C, but what if you want to insert an excursion to Skull Island between Isla Nublar and Shutter Island?

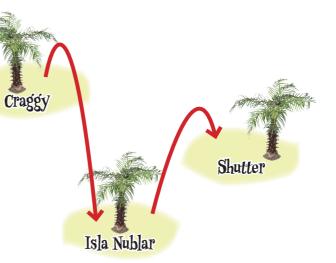

Inserting values into the list

You can insert islands just like you did earlier, by changing the values of the pointers between islands:

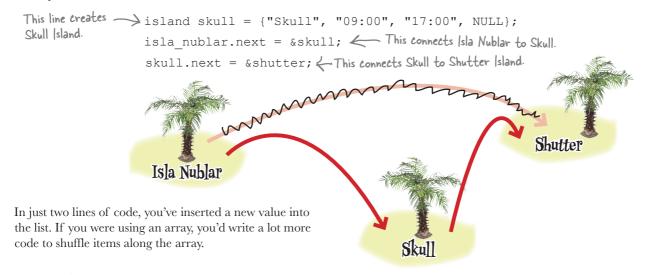

OK, you've seen how to create and use linked lists. Now let's try out your new skills...



Code Magnets

Oh, no, the code for the display() function was on the fridge door, but someone's mixed up the magnets. Do you think you can reassemble the code?



Code Magnets Solution

Oh, no, the code for the <code>display()</code> function was on the fridge door, but someone's mixed up the magnets. Were you able to reassemble the code?

```
void display(island *start)
                                         You need to keep looping until the
                                                                                At the end of each loop,
You don't
                                         current island has no next value.
                                                                                skip to the next island.
need any
extra
code at
the start
                                                                                       i->next
of the
loop.
               printf("Name: %s open: %s-%s\n",
                                                                                 i->opens
                                                               i->name
                                                                                                   i->closes
```

there are no Dumb Questions

Other languages, like Java, have linked lists built in. Does C have any data structures?

A: C doesn't really come with any data structures built in. You have to create them yourself.

What if I want to use the 700th item in a really long list? Do I have to start at the first item and then read all the way through?

A: Yes, you do.

That's not very good. I thought a linked list was better than an array.

A: You shouldn't think of data structures as being better or worse. They are either appropriate or inappropriate for what you want to use them for.

So if I want a data structure that lets me insert things quickly, I need a linked list, but if I want direct access I might use an array?

A: Exactly.

You've shown a struct that contains a pointer to another struct. Can a struct contain a whole recursive struct inside itself?

A: No.

Q: Why not?

A: C needs to know the exact amount of space a struct will occupy in memory. If it allowed full recursive copies of the same struct, then one piece of data would be a different size than another.

gcc tour.c -o tour && ./tour

09:00-17:00

Open: 09:00-17:00 Isla Nublar

Open: 09:00-17:00

Open: 09:00-17:00

Open: 09:00-17:00

Shutter

Name: Amity

Name: Skull

Open: Name: Craggy

Name:

Name:



Let's use the display() function on the linked list of islands and compile the code together into a program called tour.

```
island amity = {"Amity", "09:00", "17:00", NULL};
island craggy = {"Craggy", "09:00", "17:00", NULL};
island isla nublar = {"Isla Nublar", "09:00", "17:00", NULL};
island shutter = {"Shutter", "09:00", "17:00", NULL};
amity.next = &craggy;
craggy.next = &isla nublar;
isla nublar.next = &shutter;
island skull = {"Skull", "09:00", "17:00", NULL};
isla nublar.next = &skull;
skull.next = &shutter;
display(&amity);
```

Excellent. The code creates a linked list of islands, and you can insert items with very little work.

OK, so now that you know the basics of how to work with recursive structs and lists, you can move on to the main program. You need to read the tour data from a file that looks like this:

There will

be some

Delfino Isle Angel Island Wild Cat Island Neri's Island Great Todday more lines after this.

The folks at the airline are still creating the file, so you won't know how long it is until runtime. Each line in the file is the name of an island. It should be pretty straightforward to turn this file into a linked list. Right?



The Polite Guide to Standards

The code on this page declares a new variable, skull, right in the middle of the code. This is allowed only in C99 and C11. In ANSI C, you need to declare all your local variables at the top of a function.

> 275 you are here >

Hmmm... So far, we've used a separate variable for each item in the list. But if we don't know how long the file is, how do we know how many variables we need? I wonder if there's some way to generate new storage when we need it.

Yes, you need some way to create dynamic storage.

All of the programs you've written so far have used static storage. Every time you wanted to store something, you've added a variable to the code. Those variables have generally been stored in the stack. Remember: the stack is the area of memory set aside for storing local variables.

So when you created the first four islands, you did it like this:

```
island amity = {"Amity", "09:00", "17:00", NULL};
island craggy = {"Craggy", "09:00", "17:00", NULL};
island isla_nublar = {"Isla Nublar", "09:00", "17:00", NULL};
island shutter = {"Shutter", "09:00", "17:00", NULL};
```

Each island struct needed its own variable. This piece of code will always create exactly four islands. If you wanted the code to store more than four islands, you would need another local variable. That's fine if you know how much data you need to store at compile time, but quite often, programs don't know how much storage they need until runtime. If you're writing a web browser, for instance, you won't know how much data you'll need to store a web page until, well, you read the web page. So C programs need some way to tell the operating system that they need a little extra storage, at the moment that they need it.

Programs need dynamic storage.

Wouldn't it be dreamy if there were a way to allocate as much space as I needed with code at runtime? But I know that's just a fantasy...



Use the heap for dynamic storage

Most of the memory you've been using so far has been in the **stack**. The stack is the area of memory that's used for local variables. Each piece of data is stored in a variable, and each variable disappears as soon as you leave its function.


The trouble is, it's harder to get more storage on the stack at runtime, and that's where the **heap** comes in. The heap is the place where a program stores data that will need to be available longer term. It won't automatically get cleared away, so that means it's the perfect place to store data structures like our linked list. You can think of heap storage as being a bit like reserving a locker in a locker room.


First, get your memory with malloc()

Imagine your program suddenly finds it has a large amount of data that it needs to store at runtime. This is a bit like asking for a large storage locker for the data, and in C you do that with a function called malloc(). You tell the malloc() function exactly how much memory you need, and it asks the operating system to set that much memory aside in the heap. The malloc() function then returns a pointer to the new heap space, a bit like getting a key to the locker. It allows you access to the memory, and it can also be used to keep track of the storage locker that's been allocated.



Heap storage is like saving valuables in a locker.

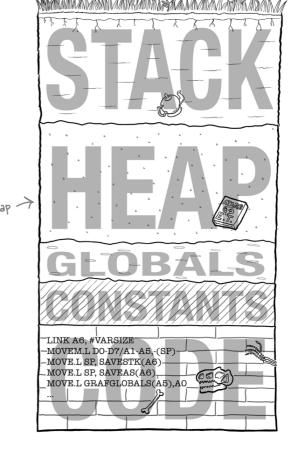

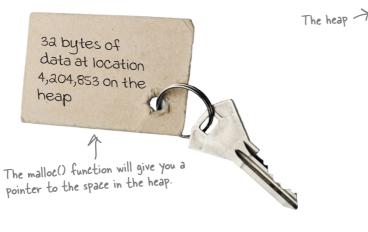

Give the memory back when you're done

The good news about heap memory is that you can keep hold of it for a really long time. The bad news is...you can keep hold of it for a really long time.

When you were just using the stack, you didn't need to worry about returning memory; it all happened automatically. Every time you leave a function, the local storage is freed from the stack.

The heap is different. Once you've asked for space on the heap, it will never be available for anything else until you tell the C Standard Library that you're finished with it. There's only so much heap memory available, so if your code keeps asking for more and more heap space, your program will quickly start to develop memory leaks.

A memory leak happens when a program asks for more and more memory without releasing the memory it no longer needs. Memory leaks are among the most common bugs in C programs, and they can be really hard to track down.

Free memory by calling the free() function

The malloc() function allocates space and gives you a pointer to it. You'll need to use this pointer to access the data and then, when you're finished with the storage, you need to release the memory using the **free()** function. It's a bit like handing your locker key back to the attendant so that the locker can be reused.

Thanks for the storage. I'm done with it now.

Every time some part of your code requests heap storage with the malloc() function, there should be some other part of your code that hands the storage back with the free() function. When your program stops running, all of its heap storage will be released automatically, but it's always good practice to explicitly call free() on every piece of dynamic memory you've created.

Let's see how malloc() and free() work.

The heap has only a fixed amount of storage available, so be sure you use it wisely.

Ask for memory with malloc()...

The function that asks for memory is called malloc() for *memory allocation*. malloc() takes a single parameter: the number of bytes that you need. Most of the time, you probably don't know exactly how much memory you need in bytes, so malloc() is almost always used with an operator called sizeof, like this:

```
#include <stdlib.h> You need to include the stdlib.h header file to pick up the malloc() and free() functions.

This means, "Give me enough space to store an island struct."
```

sizeof tells you how many bytes a particular data type occupies on your system. It might be a struct, or it could be some base data type, like int or double.

The malloc() function sets aside a chunk of memory for you, then returns a pointer containing the start address. But what kind of pointer will that be? malloc() actually returns a *general-purpose pointer*, with type **void***.

island *p = malloc(sizeof(island)); enough space for an island, and store the address in variable p.

...and free up the memory with free()

Once you've created the memory on the heap, you can use it for as long as you like. But once you've finished, you need to release the memory using the free() function.

free() needs to be given the address of the memory that malloc() created. As long as the library is told where the chunk of memory starts, it will be able to check its records to see how much memory to free up. So if you wanted to free the memory you allocated above, you'd do it like this:


OK, now that we know more about dynamic memory, we can start to write some code.

Remember: if you allocated memory with malloc() in one part of your program, you should always release it later with the free() function.

This means, "Create

Oh, no! It's the out-of-work actors...

The aspiring actors are currently between jobs, so they've found some free time in their busy schedules to help you out with the coding. They've created a utility function to create a new island struct with a name that you pass to it. The function looks like this:

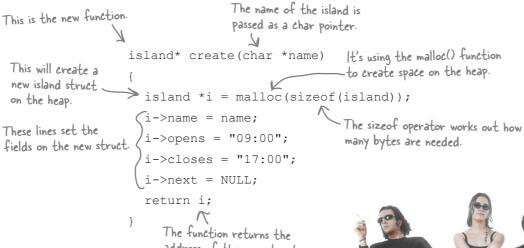

That's a pretty cool-looking function. The actors have spotted that most of the island airports have the same opening and closing times, so they've set the opens and closes fields to default values. The function returns a pointer to the newly created struct.





Look carefully at the code for the <code>create()</code> function. Do you think there might be any problems with it? Once you've thought about it good and hard, turn the page to see it in action.

The Case of the Vanishing Island

island* create(char *name)

Captain's Log. 11:00. Friday. Weather clear. A create () function using dynamic allocation has been written, and the coding team says it is ready for air trials.

```
island *i = malloc(sizeof(island));
i->name = name;
i->opens = "09:00";
i->closes = "17:00";
i->next = NULL;
return i;
}
```


14:15. Weather cloudy. Northwest headwind 15kts near Bermuda. Landing at first stop. Software team on board providing basic code. Name of island entered at the command line.

```
File Edit Window Help

> ./test_flight
Atlantis
```

14:45. Take off from landing strip rocky due to earth tremors. Software team still on board. Supplies of Jolt running low.

15:35. Arrival at second island. Weather good. No wind. Entering details into new program.

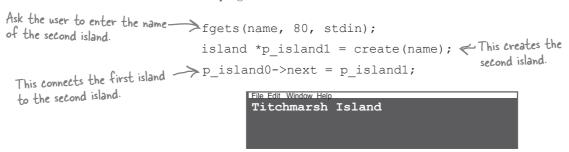

17:50 Back at headquarters tidying up on paperwork. Strange thing. The flight log produced by the test program appears to have a bug. When the details of today's flight are logged, the trip to the first island has been mysteriously renamed. Asking software team to investigate.



What happened to the name of the first island? Is there a bug in the create() function? Does the way it was called give any clues?

The Case of the Vanishing Island

What happened to the name of the first island?

Look at the code of the create () function again:

```
island* create(char *name)
{
  island *i = malloc(sizeof(island));
  i->name = name;
  i->opens = "09:00";
  i->closes = "17:00";
  i->next = NULL;
  return i;
}

Mystery
Solved
```

When the code records the name of the island, it doesn't take a copy of the whole name string; it just records the address where the name string lives in memory. Is that important? Where did the name string live? We can find out by looking at the code that was calling the function:

```
char name[80];
fgets(name, 80, stdin);
island *p_island0 = create(name);
fgets(name, 80, stdin);
island *p_island1 = create(name);
```

The program asks the user for the name of each island, but *both times* it uses the name local char array to store the name. That means that **the two islands share the same name string**. As soon as the local name variable gets updated with the name of the second island, the name of the first island changes as well.

String Copying Up Close



In C, you often need to make copies of strings. You *could* do that by calling the malloc() function to create a little space on the heap and then manually copying each character from the string you are copying to the space on the heap. But guess what? Other developers got there ahead of you. They created a function in the *string h* header called **strdup()**.

Let's say that you have a pointer to a character array that you want to copy:


char *s = "MONA LISA";




The **strdup()** function can reproduce a complete copy of the string somewhere on the heap:

char *copy = strdup(s);

The strdup() function works out how long the string is, and then calls the malloc() function to allocate the correct number of characters on the heap.

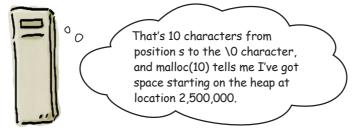

2 It then copies each of the characters to the new space on the heap.



That means that strdup() always creates space **on the heap**. It can't create space on the stack because that's for *local variables*, and local variables get cleared away too often.

But because strdup() puts new strings on the heap, that means you must always remember to release their storage with the free() function.

Let's fix the code using the strdup() function

You can fix up the original create() function using the strdup() function, like this:

```
island* create(char *name)
{
  island *i = malloc(sizeof(island));
  i->name = strdup(name);
  i->opens = "09:00";
  i->closes = "17:00";
  i->next = NULL;
  return i;
}
```

You can see that we only need to put the strdup() function on the name field. Can you figure out why that is?

It's because we are setting the opens and closes fields to *string literals*. Remember way back when you saw where things were stored in memory? String literals are stored in a **read-only** area of memory set aside for **constant values**. Because you always set the opens and closes fields to constant values, you don't need to take a defensive copy of them, because they'll never change. But you had to take a defensive copy of the name array, because something might come and update it later.

So does it fix the code?

To see if the change to the create() function fixed the code, let's run your original code again:

Dumb Questions

If the island struct had a name array rather than a character pointer, would I need to use strdup() here?

A: No. Each island struct would store its own copy, so you wouldn't need to make your own copy.

So why would I want to use char pointers rather than char arrays in my data structures?

A: char pointers won't limit the amount of space you need to set aside for strings. If you use char arrays, you will need to decide in advance exactly how long your strings might need to be.

```
File Edit Window Help CoconutAirways

> ./test_flight
Atlantis
Titchmarsh Island
Name: Atlantis
open: 09:00-17:00
Name: Titchmarsh Island
open: 09:00-17:00
```


Now that code works. Each time the user enters the name of an island, the create() function is storing it in a brand-new string.

OK, now that you have a function to create island data, let's use it to create a linked list from a file.

286 Chapter 6

Pool Puzzle

Catastrophe! The code to create an island tour has fallen into the pool! Your **job** is to take code snippets from the pool and place them into the blank lines in the code below. Your **goal** is to reconstruct the program so that it can read a list of names from Standard Input and then connect them together to form a linked list. You may **not** use the same code snippet more than once, and you won't need to use all the pieces of code.

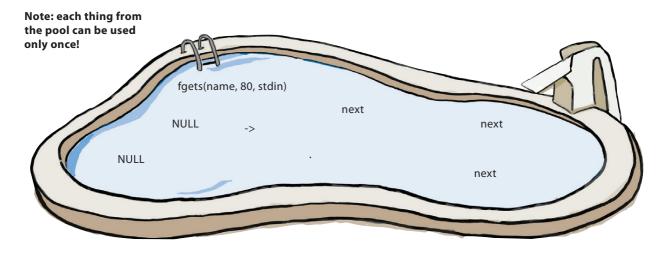

Pool Puzzle Solution

Catastrophe! The code to create an island tour has fallen into the pool! Your **job** was to take code snippets from the pool and place them into the blank lines in the code below. Your **goal** was to reconstruct the program so that it can read a list of names from Standard Input and then connect them together to form a linked list.

```
island *start = NULL;
island *i = NULL;
island *next = NULL;
char name[80];
for(; fgets(name, 80, stdin) != NULL ; i = next ) {

This creates next = create (name);
an island.

if (start == NULL)
    start = next ;

if (i != NULL)

in the first time through, start is set to the first island.

if (i != NULL)

in the first time through, start is set to the first island.

if (i != NULL)

in the first time through, start is set to the first island.

if (i != NULL)

in the first time through, start is set to the first island.

if (i != NULL)

in the first time through, start is set to the first island.

if (i != NULL)

in the first time through, start is set to the first island.

if (i != NULL)

in the first time through, start is set to the first island.

if (i != NULL)

in the first time through, start is set to the first island.

if (i != NULL)


in the first time through, start is set to the first island.


if (i != NULL)

in the first time through, start is set to the first island.

if (i != NULL)

in the first time through, start is set to the first island.
```

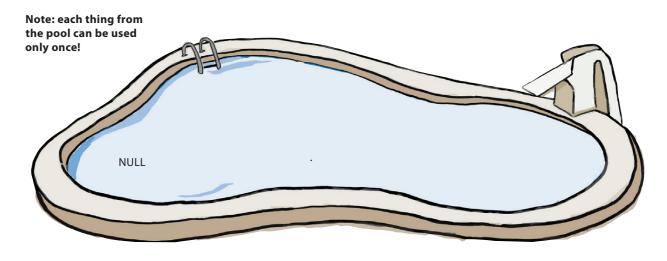



But wait! You're not done yet. Don't forget that if you ever **allocate space** with the malloc() function, you need to **release the space** with the free() function. The program you've written so far creates a linked list of islands in heap memory using malloc(), but now it's time to write some code to release that space once you're done with it.

Here's a start on a function called release() that will release all of the memory used by a linked list, if you pass it a pointer to the first island:

```
void release(island *start)
{
   island *i = start;
   island *next = NULL;
   for (; i != NULL; i = next) {
      next = .....;
      .....;
   }
}
```

Think very carefully. When you release the memory, what will you need to free? Just the island, or something more? In what sequence should you free them?



But wait! You're not done yet. Don't forget that if you ever allocate space with the malloc() function, you need to release the space with the free() function. The program you've written so far creates a linked list of islands in heap memory using malloc(), but now it's time to write some code to release that space once you're done with it.

Here's a start on a function called release () that will release all of the memory used by a linked list, if you pass it a pointer to the first island:

When you release the memory, what will you need to free? Just the island, or something more? In what sequence should you free them?

Free the memory when you're done

Now that you have a function to free the linked list, you'll need to call it when you've finished with it. Your program only needs to display the contents of the list, so once you've done that, you can release it:

```
display(start);
release(start);
```

Once that's done, you can test the code.



So, if you compile the code and then run the file through it, what happens?

```
File Edit Window Help FreeSpaceYouDon'tNeed
> ./tour < trip1.txt
Name: Delfino Isle
 Open: 09:00-17:00
Name: Angel Island
Open: 09:00-17:00
Name: Wild Cat Island
 Open: 09:00-17:00
Name: Neri's Island
Open: 09:00-17:00
Name: Great Todday
 Open: 09:00-17:00
Name: Ramita de la Baya
 Open: 09:00-17:00
Name: Island of the Blue Dolphins
 Open: 09:00-17:00
Name: Fantasy Island
Open: 09:00-17:00
Name: Farne
Open: 09:00-17:00
Name: Isla de Muert
 Open: 09:00-17:00
Name: Tabor Island
Open: 09:00-17:00
Name: Haunted Isle
 Open: 09:00-17:00
Name: Sheena Island
Open: 09:00-17:00
```

It works. Remember: you had no way of knowing how long that file was going to be. In this case, because you are just printing out the file, you *could* have simply printed it out without storing it all in memory. But because you *do* have it in memory, you're free to manipulate it. You could add in extra steps in the tour, or remove them. You could reorder or extend the tour.

Dynamic memory allocation lets you create the memory you need at RUNTIME. And the way you access dynamic heap memory is with malloc() and free().

stack and heap



Tonight's Talk: Stack and Heap Discuss Their Differences

Stack:	Heap:
Heap? Are you there? I'm home.	
	Don't see you too often this time of day. Got a little something going on?
Deep regression. Oopsexcuse me Just tidy that up	
	What're you doing?
The code just exited a function. Just need to free up the storage from those local variables.	
	You should take life a little easier. Relax a little
Perhaps you're right. Mind if I sit?	
	Beer? Don't worry about the cap; throw it anywhere.
Ithink this is yours?	
You really should consider getting somebody in to take care of this place.	Hey, you found the pizza! That's great. I've been looking for that all week.
How do you know? I mean, how do you know it hasn't just forgotten about it?	Don't worry about it. That online ordering application left it lying around. It'll probably be back for it.
	He'd have been back in touch. He'd have called free().
Hmmm? Are you sure? Wasn't it written by the same woman who wrote that dreadful Whack-abunny game? Memory leaks everywhere. I could barely move for rabbit structs. Droppings everywhere. It was terrible.	

292 Chapter 6

Stack:	Heap:
	Hey, it's not my responsibility to clear up the memory. Someone asks me for space, I give him space. I'll leave it there until he tells me to clean it up.
That's irresponsible.	
	Yeah, maybe. But I'm easy to use. Not like you and yourfussing.
Fussing? I don't fuss! You might want to use a napkin	
	<belches>What? I'm just saying you're difficult to keep track of.</belches>
I just believe that memory should be properly maintained.	
	Whatever. I'm a live-and-let-live type. If a program wants to make a mess, it's not my responsibility.
You're messy.	
	I'm easygoing.
Why don't you do garbage collection?!	
	Ah, here we go again
I mean, just a littletidying up. You don't do anything!!!	
	Easy, now.
<pre><crying>I'm sorry. I just can't cope with this level of disorganization.</crying></pre>	
	Hey, you're overflowing. Take this
 Slows nose>Thank you. Wait, what is this?	
	It's the high score table from Whack-a-Bunny. Don't worry; I don't think the program needs it anymore.

bumb Questions

Why is the heap called the heap?

A: Because the computer doesn't automatically organize it. It's just a big heap of data

What's garbage collection?

A: Some languages track when you allocate data on a heap and then, when you're no longer using the data, they free the data from the heap.

Why doesn't C contain garbage collection?

A: C is quite an old language; when it was invented, most languages didn't do automatic garbage collection.

I understand why I needed to copy the name of the island in the example. Why didn't I need to copy the opens and closes values?

A: The opens and closes values are set to string literals. String literals can't be updated, so it doesn't matter if several data items refer to the same string.

Does strdup() actually call the malloc() function?

A: It will depend on how the C Standard Library is implemented, but most of the time, yes.

O: Do I need to free all my data before the program ends?

A: You don't have to; the operating system will clear away all of the memory when the program exits. But it's good practice to always explicitly free anything you've created.



BULLET POINTS


- Dynamic data structures allow you to store a variable number of data items.
- A linked list is a data structure that allows you to easily insert items.
- Dynamic data structures are normally defined in C with recursive structs.
- A recursive struct contains one or more pointers to a similar struct.

- The stack is used for local variables and is managed by the computer.
- The heap is used for long-term storage. You allocate space with malloc().
- The sizeof operator will tell you how much space a struct needs.
- Data will stay on the heap until you release it with free ().



You've seen how to create a linked list in C. But linked lists aren't the only data structures you might need to build. Below are some other example data structures. See if you can match up the data structure with the description of how it can be used.

Pata structure






I can be used to store a sequence of items, and I make it easy to insert new items. But you can process me in only one direction.




Each item I store can connect to up to two other items. I am useful for storing hierarchical information.



I can be used to associate two different types of data. For example, you could use to me to associate people's names to their phone numbers.



Each item I store connects to up to two other items. You can process me in two directions.

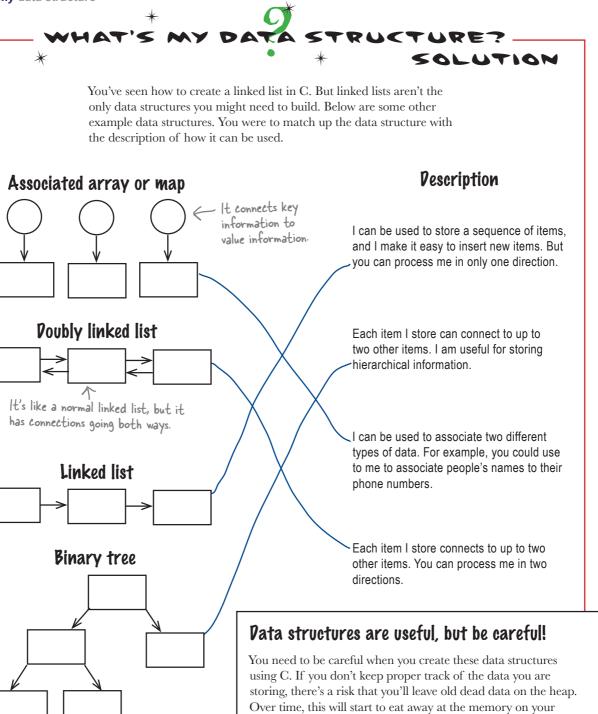

296 Chapter 6

machine, and it might cause your program to crash with memory errors. That means it's really important that you learn to track down and fix memory leaks in your code...

TOP SECRET

Federal Bureau of Investigations United States Department of Justice, Washington, D. C.

From: J. Edgar Hoover, Director

Subject: SUSPECTED LEAK IN GOVERNMENT EXPERT SYSTEM

Our Cambridge, MA, office advised that there is a suspected leak somewhere inside the new Suspicious Persons Identification Expert System (SPIES). Our sources and informants familiar with software matters advise that the supposed leak is the result of shoddy coding by person or persons unknown.

An informant who has furnished reliable information in the past and who claims to be close to the people concerned has advised that the leak is the result of careless management of data in the area of memory known to the hacker fraternity as "The Heap."

You are hereby given access to the expert system source code and have, by my order, been given access to the full resources of the FBI's software engineering lab. Consider the evidence and analyze the details of the case carefully. I want this leak found, and I want this leak fixed.

Failure is not an option.

Very truly yours,

A Edgar assoni

top secret

Exhibit A: the source code

What follows is the source code for the Suspicious Persons Identification Expert System (SPIES). This software can be used to record and identify persons of interest. You are not required to read this code in detail now, but please keep a copy in your records so that you may refer to it during the ongoing investigation.

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
typedef struct node {
  char *question;
  struct node *no;
  struct node *yes;
} node;
int yes no(char *question)
  char answer[3];
 printf("%s? (y/n): ", question);
  fgets(answer, 3, stdin);
  return answer[0] == 'y';
node* create(char *question)
 node *n = malloc(sizeof(node));
 n->question = strdup(question);
  n->no = NULL;
  n->yes = NULL;
  return n;
void release(node *n)
  if (n) {
    if (n->no)
      release(n->no);
    if (n->yes)
      release(n->yes);
    if (n->question)
      free(n->question);
    free(n);
```

298 Chapter 6

```
int main()
  char question[80];
 char suspect[20];
 node *start node = create("Does suspect have a mustache");
  start node->no = create("Loretta Barnsworth");
  start node->yes = create("Vinny the Spoon");
 node *current;
 do {
    current = start node;
    while (1) {
      if (yes no(current->question))
        if (current->yes) {
         current = current->yes;
        } else {
          printf("SUSPECT IDENTIFIED\n");
          break;
      } else if (current->no) {
        current = current->no;
      } else {
         /* Make the yes-node the new suspect name */
         printf("Who's the suspect? ");
         fgets(suspect, 20, stdin);
         node *yes_node = create(suspect);
         current->yes = yes_node;
         /* Make the no-node a copy of this question */
         node *no_node = create(current->question);
         current->no = no_node;
         /\star Then replace this question with the new question \star/
         printf("Give me a question that is TRUE for %s but not for %s? ", suspect,
            current->question);
         fgets(question, 80, stdin);
         current->question = strdup(question);
         break;
      }
  } while(yes no("Run again"));
  release(start_node);
  return 0;
```


top secret

An overview of the SPIES system

The SPIES program is an expert system that learns how to identify individuals using distinguishing features. The more people you enter into the system, the more the software learns and the smarter it gets.


The program builds a tree of suspects

The program records data using a **binary tree**. A binary tree allows each piece of data to connect to two other pieces of data like this:

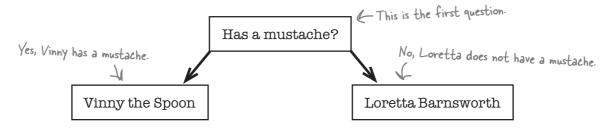

This is what the data looks like when the program starts. The first item (or **node**) in the tree stores a question: "Does the suspect have a mustache?" That's linked to two other nodes: one if the answer's **yes**, and another if the answer's **no**. The yes and no nodes store the name of a suspect.

The program will use this tree to ask the user a series of questions to identify a suspect. If the program can't find the suspect, it will ask the user for the name of the new suspect and some detail that can be used to identify him or her. It will store this information in the tree, which will gradually grow as it learns more things.

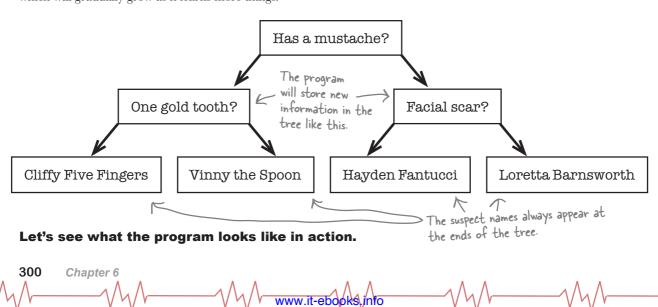



This is what happens if an agent compiles the SPIES program and then takes it on a test run:

```
File Edit Window Help TrustNoone

> gcc spies.c -o spies && ./spies
Does suspect have a mustache? (y/n): n
Loretta Barnsworth? (y/n): n
Who's the suspect? Hayden Fantucci
Give me a question that is TRUE for Hayden Fantucci
but not for Loretta Barnsworth? Has a facial scar
Run again? (y/n): y
Does suspect have a mustache? (y/n): n
Has a facial scar
? (y/n): y
Hayden Fantucci
? (y/n): y
SUSPECT IDENTIFIED
Run again? (y/n): n
>
```

The first time through, the program fails to identify the suspect Hayden Fantucci. But once the suspect's details are entered, the program learns enough to identify Mr. Fantucci on the second run.

Pretty smart. So what's the problem?

Someone was using the system for a few hours in the lab and noticed that even though the program appeared to be working correctly, it was using almost **twice the amount of memory** it needed.

That's why **you** have been called in. Somewhere deep in the source code, something is allocating memory on the heap and *never freeing it.* Now, you could just sit and read through all of the code and hope that you see what's causing the problem. But memory leaks can be awfully difficult to track down.

So maybe you should pay a trip to the software lab...

you are here > 301

\times \ti

Software forensics: using valgrind

It can take an achingly long time to track down bugs in large, complex programs like SPIES. So C hackers have written tools that can help you on your way. One tool used on the Linux operating system is called valgrind.

valgrind can monitor the pieces of data that are allocated space on the heap. It works by creating its own **fake version** of malloc(). When your program wants to allocate some heap memory, valgrind will intercept your calls to malloc () and free () and run its own versions of those functions. The valgrind version of malloc () will take note of which piece of code is calling it and which piece of memory it allocated. When your program ends, valgrind will report back on any data that was left on the heap and tell you where in your code the data was created.

Prepare your code: add debug info

You don't need to do anything to your code before you run it through valgrind. You don't even need to recompile it. But to really get the most out of valgrind, you need to make sure your executable contains **debug information**. Debug information is extra data that gets packed into your executable when it's compiled—things like the line number in the source file that a particular piece of code was compiled from. If the debug info is present, valgrind will be able to give you a lot more details about the source of your memory leak.

To add debug info into your executable, you need to recompile the source with the -q switch:

Just the facts: interrogate your code

To see how valgrind works, let's fire it up on a Linux box and use You can find out if valgrind is available it to interrogate the SPIES program a couple times.

The first time, use the program to identify one of the built-in suspects: Vinny the Spoon. You'll start valgrind on the command line with the --leak-check=full option and then pass it the program you want to run:



valgrind will keep track of data that is allocated but not freed.

The -g switch tells the compiler to record the line numbers against the code it compiles.

on your operating system and how to install it at http://valgrind.org.

```
File Edit Window Help valgrindRules
  valgrind --leak-check=full ./spies
  1754== Copyright (C) 2002-2010, and GNU GPL'd, by Julian Seward et al.
Does suspect have a mustache? (y/n): y
Vinny the Spoon? (y/n): y
SUSPECT IDENTIFIED
Run again? (y/n): n ==1754== All heap blocks were freed -- no leaks are possible
```

302 Chapter 6

Use valgrind repeatedly to gather more evidence

When the SPIES program exited, there was nothing left on the heap. But what if you run it a second time and teach the program about a new suspect called Hayden Fantucci?

```
File Edit Window Help valgrindRules
  valgrind --leak-check=full ./spies
  =2750== Copyright (C) 2002-2010, and GNU GPL'd, by Julian Seward et al.
Does suspect have a mustache? (y/n): n
Loretta Barnsworth? (y/n): n
Who's the suspect? Hayden Fantucci
Give me a question that is TRUE for Hayden Fantucci
                                                                Upi allocated new pieces
but not for Loretta Barnsworth? Has a facial scar
Run again? (y/n): n
  =2750== HEAP
               SUMMARY:
                                                                only freed 10 of
 =2750==
             in use at exit: 19 bytes in 1 blocks
 =2750==
            total heap usage: 11 allocs, 10 frees, 154 bytes allocated
  =2750== 19 bytes in 1 blocks are definitely lost in loss record 1 of 1
  2750==
             at 0x4026864: malloc (vg_replace_malloc.c:236)
             by 0x40B3A9F: strdup (strdup.c:43)
  =2750==
             by 0x8048587: create (spies.c:22)
                                                         Do these lines give us any clues?
  =2750==
             by 0x804863D: main (spies.c:46)
  2750==
          LEAK SUMMARY:
  2750==
  =2750==
             definitely lost: 19 bytes in 1 blocks
                              Why 19 bytes? Is that a clue?
```

This time, valgrind found a memory leak

It looks like there were 19 bytes of information left on the heap at the end of the program. valgrind is telling you the following things:

- 19 bytes of memory were allocated but not freed.
- Looks like we allocated new pieces of memory 11 times, but freed only 10 of them.
- Do these lines give us any clues?
- Why 19 bytes? Is that a clue?

That's quite a few pieces of information. Let's take these facts and analyze them.



valgrind

Look at the evidence

OK, now that you've run valgrind, you've collected quite a few pieces of evidence. It's time to analyze that evidence and see if you can draw any conclusions.



1. Location

You ran the code two times. The first time, there was no problem. The memory leak only happened when you entered a new suspect name. Why is that significant? Because that means the leak can't be in the code that ran the first time. Looking back at the source code, that means the problem lies in this section of the code:

```
} else if (current->no) {
  current = current->no;
} else {
   /* Make the yes-node the new suspect name */
   printf("Who's the suspect? ");
   fgets(suspect, 20, stdin);
   node *yes node = create(suspect);
   current->yes = yes node;
   /* Make the no-node a copy of this question */
   node *no node = create(current->question);
   current->no = no node;
   /* Then replace this question with the new question */
   printf("Give me a question that is TRUE for %s but not for %s? ",
           suspect, current->question);
   fgets(question, 80, stdin);
   current->question = strdup(question);
   break;
```

304

2. Clues from valgrind

When you ran the code through valgrind and added a single suspect, the program allocated memory 11 times, but only released memory 10 times. What does that tell you?

valgrind told you that there were 19 bytes of data left on the heap when the program ended. If you look at the source code, what piece of data is likely to take up 19 bytes of space?

Finally, what does this output from valgrind tell you?

```
==2750== 19 bytes in 1 blocks are definitely lost in loss record 1 of 1
==2750== at 0x4026864: malloc (vg_replace_malloc.c:236)
==2750== by 0x40B3A9F: strdup (strdup.c:43)
==2750== by 0x8048587: create (spies.c:22)
==2750== by 0x804863D: main (spies.c:46)
```

* D/C		
* QUESTIONS *		
Consider the evidence carefully, then answer these questions.		
1. How many pieces of data were left on the heap?		
2. What was the piece of data left on the heap?		
3. Which line or lines of code caused the leak?		
4. How do you plug the leak?		

you are here ▶ 305

cunning plan

* BIG *

306

Chapter 6

www.it-ebooks,info

The fix on trial

Now that you've added the fix to the code, it's time to run the code through valgrind again.

```
File Edit Window Help valgrindRules

> valgrind --leak-check=full ./spies
==1800== Copyright (C) 2002-2010, and GNU GPL'd, by Julian Seward et al.

Does suspect have a mustache? (y/n): n

Loretta Barnsworth? (y/n): n

Who's the suspect? Hayden Fantucci

Give me a question that is TRUE for Hayden Fantucci

but not for Loretta Barnsworth? Has a facial scar

Run again? (y/n): n
==1800== All heap blocks were freed -- no leaks are possible

>
```

www.jt-ebooks.info

The leak is fixed

You ran exactly the same test data through the program, and this time the program cleared everything away from the heap.

How did you do? Did you crack the case? Don't worry if you didn't manage to find and fix the leak this time. Memory leaks are some of the hardest bugs to find in C programs. The truth is that many of the C programs available probably have some memory bugs buried deep inside them, but that's why tools like valgrind are important.

- Spot when leaks happen.
- Identify the location where they happen.
- Check to make sure the leak is fixed.

you are here ➤ 307

there are no **Dumb Questions**

valgrind said the leaked memory was created on line 46, but the leak was fixed on a completely different line. How come?

A: The "Loretta..." data was put onto the heap on line 46, but the leak happened when the variable pointing to it (current->question) was reassigned without freeing it. Leaks don't happen when data is created; they happen when the program loses all references to the data

Can I get valgrind on my Mac/ Windows/FreeBSD system?

A: Check http://valgrind.org for details on the latest release.

How does valgrind intercept calls to malloc() and free()?

A: The malloc() and free() functions are contained in the C Standard Library. But valgrind contains a library with its own versions of malloc() and free(). When you run a program with valgrind, your program will be using valgrind's functions, rather than the ones in the C Standard Library.

Why doesn't the compiler always include debug information when it compiles code?

A: Because debug information will make your executable larger, and it may also make your program slightly slower.

Where did the name valgrind come from?

A: Valgrind is the name of the entrance to Valhalla. valgrind (the program) gives you access to the computer's heap.



BULLET POINTS

- valgrind checks for memory leaks
- valgrind works by intercepting the calls to malloc() and free().
- When a program stops running, valgrind prints details of what's left on the heap.
- If you compile your code with debug information, valgrind can give you more information.
- If you run your program several times, you can narrow the search for the leak
- valgrind can tell you which lines of code in your source put the data on the heap.
- valgrind can be used to check that you've fixed a leak.

Dynamic data

Your C Toolbox

You've got Chapter 6 under your belt, and now you've added data structures and dynamic memory to your toolbox. For a complete list of tooltips in the book, see Appendix ii.

structures use recursive Data can A linked structs. be inserted list is more Recursive easily into a extensible structs contain than an array. linked list. one or more A linked links to similar list is a dynamic data data. structure. malloc() allocates memory on the heap. Unlike the free() stack, heap releases memory is not memory on automatically the heap. released. The stack strdup() will is used for local create a copy A memory leak of a string on variables. is allocated memory you can the heap. no longer access. valgrind can help you track down memory leaks.



7 advanced functions







Basic functions are great, but sometimes you need more.

So far, you've focused on the basics, but what if you need even more *power* and *flexibility* to achieve what you want? In this chapter, you'll see how to **up your code's**IQ by passing functions as parameters. You'll find out how to **get things sorted with comparator functions**. And finally, you'll discover how to make your code *super stretchy* with variadic functions.

Looking for Mr. Right...

You've used a lot of C functions in the book so far, but the truth is that there are still some ways to make your C functions a lot more powerful. If you know how to use them correctly, C functions can make your code **do more things** but *without* writing a lot more code.

To see how this works, let's look at an example. Imagine you have an array of strings that you want to filter down, displaying some strings and not displaying others:

```
int NUM_ADS = 7;
char *ADS[] = {
   "William: SBM GSOH likes sports, TV, dining",
   "Matt: SWM NS likes art, movies, theater",
   "Luis: SLM ND likes books, theater, art",
   "Mike: DWM DS likes trucks, sports and bieber",
   "Peter: SAM likes chess, working out and art",
   "Josh: SJM likes sports, movies and theater",
   "Jed: DBM likes theater, books and dining"
};
```

I want someone into sports, but definitely not into Bieber...

Let's write some code that uses string functions to filter this array down.






Code Magnets

Complete the find () function so it can track down all the sports fans in the list who **don't** also share a passion for Bieber.

Beware: you might not need all the fragments to complete the function.

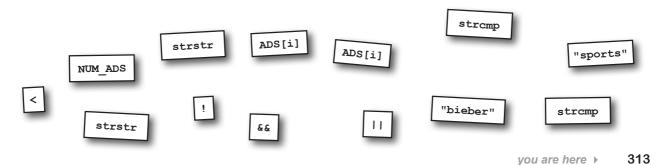



Code Magnets Solution

You were to complete the $\verb|find|$ () function so it can track down all the sports fans in the list who **don't** also share a passion for Bieber.

strcmp

strcmp



Now, if you take the function and the data, and wrap everything up in a program called find.c, you can compile and run it like this:

And sure enough, the find() function loops through the array and finds the matching strings. Now that you have the basic code, it would be easy to create *clones* of the function that could perform different kinds of searches.

Hey, wait! Clone? Clone the function???? That's dumb. Each version would only vary by, like, one line.

Exactly right. If you clone the function, you'll have a lot of duplicated code.

C programs often have to perform tasks that are *almost identical* except for some small detail. At the moment, the find() function runs through each element of the array and applies a simple test to each string to look for matches. But the test it makes is **hardwired**. It will always perform the same test.

Now, you could pass some strings into the function so that it could search for different substrings. The trouble is, that wouldn't allow find() to check for *three* strings, like "arts," "theater," or "dining." And what if you needed something wildly different?

You need something a little more sophisticated...


Find someone who likes sports or working out. I want a nonsmoker who likes the theater.

Find someone who likes the art, theater, or dining.



you are here ▶ 315

Pass code to a function

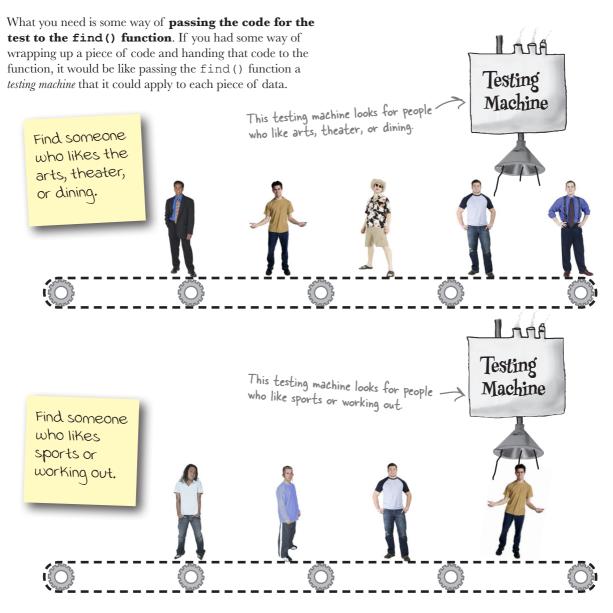

This means the bulk of the find() function would stay **exactly the same**. It would still contain the code to check each element in an array and display the same kind of output. But the test it applies against each element in the array would be done *by the code that you pass to it.*

You need to tell find() the name of a function

Imagine you take our original search condition and rewrite it as a function:

```
int sports_no_bieber(char *s)
{
   return strstr(s, "sports") && !strstr(s, "bieber");
}
```

Now, if you had some way of passing **the name of the function** to find () as a *parameter*, you'd have a way of **injecting** the test:

If you could find a way of passing a function name to find(), there would be no limit to the kinds of tests that you could make in the future. As long as you can write a function that will return *true* or *false* to a string, you can reuse the same find() function.

```
find(sports_no_bieber);
find(sports_or_workout);
find(ns_theater);
find(arts theater or dining);
```

But how do you say that a parameter stores the name of a function? And if you have a function name, how do you use it to call the function? I want someone into sports, but definitely not into Bieber...




Every function name is a pointer to the function...

You probably guessed that pointers would come into this somewhere, right? Think about what the **name of a function** really is. It's a way of referring to the piece of code. And that's just what a pointer is: a way of referring to something in memory.

That's why, in C, function names are also pointer variables. When you create a function called go_to_warp_speed(int speed), you are also creating a pointer variable called go_to_warp_speed that contains the address of the function. So, if you give find() a parameter that has a function pointer type, you should be able to use the parameter to call the function it points to.

```
int go to warp speed(int speed)
  dilithium crystals (ENGAGE);
  warp = speed;
  reactor core(c, 125000 * speed, PI);
  clutch (ENGAGE);
  brake(DISENGAGE);
                    Whenever you create a function,
  return 0;
                    you also create a function pointer
}
                    with the same name.
                     The pointer contains the
                     address of the function.
go to warp speed(4);
        When you call the function, you are
        using the function pointer.
```

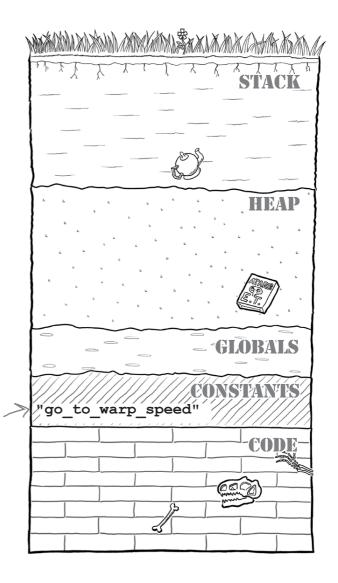

Let's look at the C syntax you'll need to work with function pointers.

318 Chapter 7

...but there's no function data type

Usually, it's pretty easy to declare pointers in C. If you have a data type like int, you just need to add an asterisk to the end of the data type name, and you declare a pointer with int *. Unfortunately, C doesn't have a function data type, so you can't declare a function pointer with anything like function *.

```
int *a; This declares an int pointer...

function *f; — ...but this won't declare a function pointer.
```

Why doesn't C have a function data type?

C doesn't have a function data type because there's not just one *type* of function. When you create a function, you can vary a lot of things, such as the return type or the list of parameters it takes. That combination of things is what defines the *type* of the function.

So, for function pointers, you'll need to use slightly more complex notation...

How to create function pointers

Say you want to create a pointer variable that can store the address of each of the functions on the previous page. You'd have to do it like this:

```
int (*warp_fn) (int);

warp_fn = go_to_warp_speed;

warp_fn(4);

This will create a variable called address of the go_to_warp_speed()

function.

This is just like calling go_to_warp_speed(4).

char** (*names_fn) (char*,int);

names_fn = album_names;

char** results = names_fn("Sacha Distel", 1972);

This will create a variable called names_fn that can store the address of the album_names() function.
```

That looks pretty complex, doesn't it?

Unfortunately, it has to be, because you need to tell C the return type and the parameter types the function will take. But once you've declared a function pointer variable, you can use it like any other variable. You can assign values to it, you can add it to arrays, and you can also pass it to functions...

...which brings us back to your find() code...



What does char** mean? Is it a typing error?

A: char** is a pointer normally used to point to an array of strings.



Take a look at those other types of searches that people have asked for. See if you can create a function for each type of search. Remember: the first is already written.

```
____int sports_no_bieber(char *s)
Someone who likes
                  return strstr(s, "sports") && !strstr(s, "bieber");
sports but not Bieber
Find someone
                  int sports or workout(char *s)
who likes
sports or
 working out.
 I want a non-
                  int ns theater(char *s)
 smoker who
 likes the
 theater.
Find someone
                  int arts theater or dining(char *s)
 who likes the
 arts, theater,
 or dining.
Then, see if you can complete the find () function:
        void find ( ) find() will need a function pointer passing
                                               to it called match.
          int i;
          puts("Search results:");
          puts("----");
          for (i = 0; i < NUM ADS; i++) {
           if (match (ADS[i])) { This will call the match()
             printf("%s\n", ADS[i]); function that was passed in
          puts("----");
```

```
You were to take a look at those other types of searches that people have asked for and create a
               function for each type of search.
                  int sports no bieber(char *s)
 SOLUTION
Someone who likes
                     return strstr(s, "sports") && !strstr(s, "bieber");
sports but not Bieber
Find someone
                   int sports or workout(char *s)
who likes
                      return strstr(s, "sports") || strstr(s, "working out");
sports or
 working out.
                  int ns theater(char *s)
 I want a non-
 smoker who
 likes the
                      return strstr(s, "NS") ¿¿ strstr(s, "theater");
 theater.
Find someone
                   int arts theater or dining(char *s)
 who likes the
 arts, theater,
                      return strstr(s, "arts") || strstr(s, "theater") || strstr(s, "dining");
 or dining.
Then, you were to complete the find () function:
        void find( int (*match)(char*) )
          int i;
          puts("Search results:");
          puts("----");
          for (i = 0; i < NUM ADS; i++) {
            if (match(ADS[i])) {
              printf("%s\n", ADS[i]);
          puts("----");
```



Let's take those functions out on the road and see how they perform. You'll need to create a program to call find() with each function in turn:


```
int main()
   find(sports no bieber);
   find(sports or workout);
   find(ns theater);
   find(arts theater or dining);
                                                         File Edit Window Help FindersKeepers
                                                            ./find
   return 0;
                                                          Search results:
                                                          William: SBM GSOH likes sports, TV, dining Josh: SJM likes sports, movies and theater
          This is find(sports_no_bieber).
                                                          Search results:
                                                          William: SBM GSOH likes sports, TV, dining Mike: DWM DS likes trucks, sports and bieber Peter: SAM likes chess, working out and art Josh: SJM likes sports, movies and theater
          This is find(sports or workout).
                                                          Search results:
                    This is find(ns_theater).
                                                          Matt: SWM NS likes art, movies, theater
      This is find(arts_theater_or_dining).
                                                          Search results:
                                                          William: SBM GSOH likes sports, TV, dining Matt: SWM NS likes art, movies, theater Luis: SLM ND likes books, theater, art Josh: SJM likes sports, movies and theater
                                                          Jed: DBM likes theater, books and dining
```

Each call to the find () function is performing a very different search. That's why function pointers are one of the most powerful features in C: they allow you to mix functions together. Function pointers let you build programs with a lot **more power** and a lot **less code**.



-The Hunter's Guide to Function Pointers

When you're out in the reeds, identifying those function pointers can be pretty tricky. But this simple, easy-to-carry guide will fit in the ammo pocket of any C user.

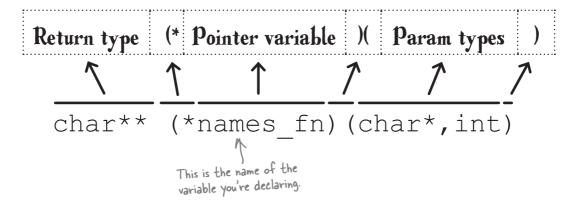

bumb Questions

If function pointers are just pointers, why don't you need to prefix them with a * when you call the function?

A: You can. In the program, instead of writing match (ADS[i]), you could have written (*match) (ADS[i]).

And could I have used & to get the address of a method?

A: Yes. Instead of find (sports_or_ workout), you could have written find (&sports or workout).

Then why didn't I?

A: Because it makes the code easier to read. If you skip the * and &, C will still understand what you're saying.

Get it sorted with the C Standard Library

Lots of programs need to sort data. And if the data's something simple like a set of numbers, then sorting is pretty easy. Numbers have their own natural order. But it's not so easy with other types of data.

Imagine you have a set of people. How would you put them in order? By height? By intelligence? By hotness?



When the people who wrote the C Standard Library wanted to create a sort function, they had a problem:

How could a sort function sort any type of data at all?

Use function pointers to set the order

You probably guessed the solution: the C Standard Library has a sort function that accepts a pointer to a **comparator function**, which will be used to decide if one piece of data is **the same as**, **less than**, or **greater than** another piece of data

```
This is what the qsort () function looks like: This is a pointer

qsort (void *array, to an array.

This is the length size t length, This is the size of each can point to anything.


size t item_size, element in the array.

int (*compar) (const void *, const void *));

This is a pointer to a function that compares two items in the array.
```

The qsort() function compares pairs of values over and over again, and if they are in the wrong order, the computer will switch them.

And that's what the comparator function is for. It will tell qsort () which order a pair of elements should be in. It does this by returning three different values:

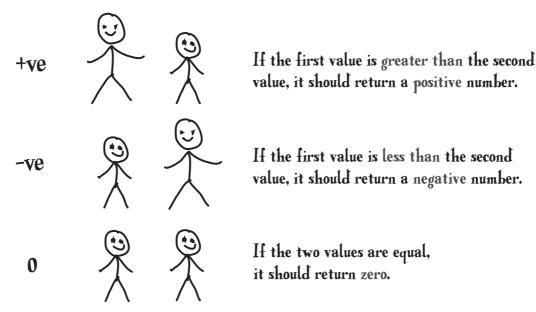

To see how this works in practice, let's look at an example.

Sorting ints Up Close



Let's say you have an array of integers and you want to sort them in increasing order. What does the comparator function look like?

```
int scores[] = \{543,323,32,554,11,3,112\};
```

If you look at the **signature** of the comparator function that qsort() needs, it takes two **void pointers** given by **void***. Remember void* when we used malloc()? A void pointer can store the address of **any kind of data**, but you always need to *cast* it to something more specific before you can use it.

The qsort() function works by comparing pairs of elements in the array and then placing them in the correct order. It compares the values by calling the comparator function that you give it. A void pointer void* can store a pointer to anything.

```
int compare_scores(const void* score_a, const void* score_b)
{
   ...
}
```

Values are always passed to the function as pointers, so the first thing you need to do is get the integer values from the pointers:

```
You need to cast the void int a = *(int*) score_a;
pointer to an integer pointer. int b = *(int*) score b;
```

This first * then gets the int_stored at address score_b.

Then you need to return a positive, negative, or zero value, depending on whether a is greater than, less than, or equal to b. For integers, that's pretty easy to do—you just subtract one number from the other:

The comparator function returned the value -21. That means 11 needs to be before 32.


return a - b;

If a > b, this is positive. If a < b, this is negative. If a and b are equal, this is zero.

And this is how you ask qsort () to sort the array:

qsort(scores, 7, sizeof(int), compare_scores);





Now it's your turn. Look at these different sort descriptions. See if you can write a comparator function for each one. To get you started, the first one is already completed.

Sort integer scores, with the smallest first.

```
int compare_scores(const void* score_a, const void* score_b)
{
  int a = *(int*)score_a;
  int b = *(int*)score_b;
  return a - b;
```

sort integer scores, with the largest first.

sort the rectangles in area order, smallest first.

}

Warning: th	nis one is really trieky.
Sort a list of names in alphabetical order. Case- sensitive. There's a hint: strcmp("Abe", "Def") < 0	int compare_names (const void* a, const void* b) { // If a string is a pointer to a char, what will a pointer to it be?
And finally: if you already had the hese two comparator functions?	e compare_areas() and compare_names() functions, how would you write
sort the rectangles in area order, largest first.	<pre>int compare_areas_desc(const void* a, void* b) {</pre>
Sort a list of names in reverse alphabetical order. Case—sensitive.	<pre>int compare_names_desc(const void* a, const void* b) {</pre>



Now it's your turn. You were to look at these different sort descriptions and write a comparator function for each one.

Sort integer scores, with the smallest first.

```
int compare scores(const void* score a, const void* score b)
                                         This is the one done before.
  int a = *(int*)score a;
  int b = *(int*)score b;
  return a - b;
```

sort integer scores, with the largest first.

```
int compare scores desc(const void* score a, const void* score b)
int a = *(int*)score_a;
int b = *(int*)score b;
return b - a;
       - If you subtract the numbers the other way
```

around, you'll reverse the order of the final sort.

sort the rectangles in area order, smallest first.

```
typedef struct { This is the
  int width;
                 rectangle type.
  int height;
} rectangle;
int compare areas(const void* a, const void* b)
>> rectangle* ra = (rectangle*)a;
rectangle* rb = (rectangle*)b;
```

```
First, convert
the pointers to
the correct type.
               >int area_a = (ra->width * ra->height);
```

```
Then, calculate
        ≥int area_b = (rb->width * rb->height);
the areas.
        🗦 return area_a – area_b;
```

Then, use the subtraction trick Sort a list of names in alphabetical order. Casesensitive.

Here's a hint: stremp("Abe", "Def") < 0

And finally: if you already had the <code>compare_areas()</code> and <code>compare_names()</code> functions, how did you write these two comparator functions?

sort the rectangles in area order, largest first.

```
int compare_areas_desc(const void* a, const void* b)
{
   return compare_areas(b, a);
}
Or you could have used -compare_areas(a, b).
```

Sort a list of names in reverse alphabetical order. Case—sensitive.

```
int compare_names_desc(const void* a, const void* b)

{
    return compare_names(b, a);

    Or you could have used
    _compare_names(a, b).
```

D ex

Don't worry if this exercise caused you a few problems.

It involved pointers, function pointers, and even a little math. If you found it tough, take a break, drink a little water, and then try it again in an hour or two.



Some of the comparator functions were really pretty gnarly, so it's worth seeing how they run in action. This is the kind of code you need to call the functions.

```
#include <stdio.h>
                  #include <string.h>
                  #include <stdlib.h>
The comparator
functions go here. -
                  int main()
                     int scores[] = \{543, 323, 32, 554, 11, 3, 112\};
                     int i;
 This is the line
                   \Rightarrow qsort(scores, 7, sizeof(int), compare_scores_desc);
  that sorts the
  scores.
                     puts("These are the scores in order:");
                                                                      asort() changes
                    for (i = 0; i < 7; i++) {
                                                                      the order of the
This will print out
                       printf("Score = %i\n", scores[i]);
                                                                      elements in the array.
the array once
it's been sorted
                     char *names[] = {"Karen", "Mark", "Brett", "Molly"};
    This sorts
                    qsort(names, 4, sizeof(char*), compare names);
    the names.
                     puts("These are the names in order:");
                     for (i = 0; i < 4; i++) {
Remember: an
                       printf("%s\n", names[i]); This prints the sorted names out.
array of names
is just an array
                     }
of char pointers,
                     return 0;
so the size of
each item is
sizeof(char*).
```

If you compile and run this code, this is what you get:

```
File Edit Window Help Sorted

> ./test_drive
These are the scores in order:
Score = 554
Score = 543
Score = 323
Score = 112
Score = 32
Score = 11
Score = 3
These are the names in order:
Brett
Karen
Mark
Molly
>
```

Great, it works.

Now try writing your own example code. The sorting functions can be incredibly useful, but the comparator functions they need can be tricky to write. But the more practice you get, the easier they become.



Dumb Questions

I don't understand the comparator function for the array of strings. What does char** mean?

A: Each item in a string array is a char pointer (char*). When qsort() calls the comparator function, it sends pointers to two elements in the arrays. That means the comparator receives two pointers-to-pointers-to-char. In C notation, each value is a char**.

OK, but when I call the strcmp() function, why does the code say strcmp(*a, *b)? Why not strcmp(a, b)?

A: a and b are of type char**. The strcmp() function needs values of type char*.

Does qsort() create a sorted version of an array?

A: It doesn't make a copy, it actually modifies the original array.

Why does my head hurt?

Pon't worry about it. Pointers are really difficult to use sometimes. If you don't find them a little confusing, it probably means you aren't thinking hard enough about them.

Automating the Pear John letters

Imagine you're writing a mail-merge program to send out different types of messages to different people. One way of creating the data for each response is with a struct like this:

These are the three types of messages that will be sent to people.

The enum gives you the names for each of the three types of response you'll be sending out, and that response type can be recorded against each response. Then you'll be able to use your new response data type by calling one of these three functions for each type of response:

```
void dump(response r)
{
   printf("Dear %s,\n", r.name);
   puts("Unfortunately your last date contacted us to");
   puts("say that they will not be seeing you again");
}

void second_chance(response r)
{
   printf("Dear %s,\n", r.name);
   puts("Good news: your last date has asked us to");
   puts("arrange another meeting. Please call ASAP.");
}


void marriage(response r)
{
   printf("Dear %s,\n", r.name);
   puts("Congratulations! Your last date has contacted");
   puts("us with a proposal of marriage.");
}
```

So, now that you know what the data looks like, and you have the functions to generate the responses, let's see how complex the code is to generate a set of responses from an array of data.

Pool Puzzle

Take code fragments from the pool and place them into the blank lines below. Your goal is to piece together the main() function so that it can generate a set of letters for the array of response data. You may **not** use the same code fragment more than once.

```
int main()
 response r[] = {
   {"Mike", DUMP}, {"Luis", SECOND_CHANCE},
   {"Matt", SECOND CHANCE}, {"William", MARRIAGE}
 };
 int i;
 for (i = 0; i < 4; i++) {
   switch(_____) {
   case :
     dump(_____);
     break;
   case :
  second_chance( );
     break;
   default:
    }
 return 0;
```

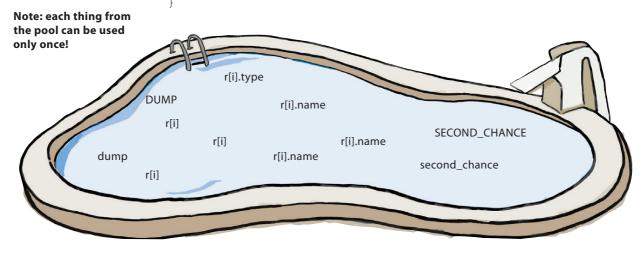

Pool Puzzle Solution

Take code fragments from the pool and place them into the blank lines below. Your goal was to piece together the main() function so that it can generate a set of letters for the array of response data.

```
int main()
                        response r[] = {
                          {"Mike", DUMP}, {"Luis", SECOND_CHANCE},
                          {"Matt", SECOND_CHANCE}, {"William", MARRIAGE}
                        };
                        int i;
                        for (i = 0; i < 4; i++) { \leftarrow Looping through the array
                          switch(\underline{r[i].type}) { Testing the type field each time
                          case DUMP :
                            Call the method for
                            break;
     each matching type.
                          case SECOND_CHANCE:
                            second_chance( r[i] );
                            break;
                          default:
                            marriage( r[i] );
                        return 0;
Note: each thing from
the pool can be used
only once!
                                      r[i].name
                                              r[i].name
            dump
                                     r[i].name
                                                          second_chance
```



When you run the program, sure enough, it generates the correct response for each person:

```
File Edit Window Help DontForgetToBreak
./send_dear_johns
Dear Mike,
Unfortunately your last date contacted us to
say that they will not be seeing you again
Dear Luis,
Good news: your last date has asked us to
arrange another meeting. Please call ASAP.
Dear Matt,
Good news: your last date has asked us to
arrange another meeting. Please call ASAP.
Dear William,
Congratulations! Your last date has contacted
us with a proposal of marriage.
>
```

Well, it's good that it worked, but there is quite a lot of code in there just to call a function for each piece of response data. Every time you need call a function that matches a response type, it will look like this:

```
switch(r.type) {
case DUMP:
   dump(r);
   break;
case SECOND_CHANCE:
   second_chance(r);
   break;
default:
   marriage(r);
}
```

And what will happen if you add a **fourth** response type? You'll have to change every section of your program that looks like this. Soon, you will have a lot of code to maintain, and it might go wrong.

Fortunately, there is a trick that you can use in C, and it involves **arrays**...

They told me a coder forgot a set of break statements, and that meant I ended up with this guy...

0

you are here ▶

337


www.it-ebooks.info

Create an array of function pointers

The trick is to create an array of function pointers that match the different response types. Before seeing how that works, let's look at how to create an array of function pointers. If you had an array variable that could store a whole bunch of function names, you could use it like this:

```
replies[] = {dump, second chance, marriage};
```

But that syntax doesn't quite work in C. You have to tell the compiler exactly what the functions will look like that you're going to store in the array: what their return types will be and what parameters they'll accept. That means you have to use this **much more complex** syntax:

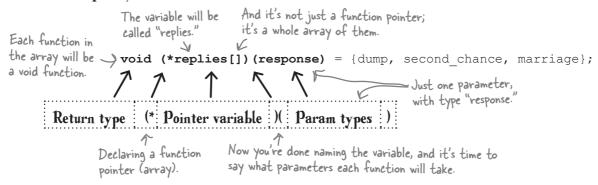

But how does an array help?


Look at that array. It contains a set of function names that are in **exactly the same order as the types in the enum**:

```
enum response type {DUMP, SECOND CHANCE, MARRIAGE};
```

This is *really important*, because when C creates an enum, it gives each of the symbols a number starting at 0. So DUMP == 0, SECOND_CHANCE == 1, and MARRIAGE == 2. And that's really neat, because it means you can get a pointer to one of your sets of functions using a **response_type**:

Let's see if you can use the function array to replace your old main() function.

338 Chapter 7



OK, this exercise is quite a tough one. But take your time with it, and you should be fine. You already have all the information you need to complete the code. In this new version of the main() function, the whole switch/case statement used before has been removed and needs to be replaced with a single line of code. This line of code will find the correct function name from the replies array and then use it to call the function.



OK, this exercise was quite a tough one. In this new version of the \mathtt{main} () function, the whole $\mathtt{switch/case}$ statement used before was removed, and you needed to replace it. This line of code will find the correct function name from the $\mathtt{replies}$ array and then use it to **call the function**.

Let's break that down.

This whole thing is a function like "dump" or "marriage."



This is your array of function names.

This is a value like O for DUMP or 2 for MARRIAGE.

You're calling the function and passing it the response data r[i].



Now, when you run the new version of the program, you get exactly the same output as before:

```
File Edit Window Help WholsJohn

> ./dear_johns

Dear Mike,

Unfortunately your last date contacted us to say that they will not be seeing you again

Dear Luis,

Good news: your last date has asked us to arrange another meeting. Please call ASAP.

Dear Matt,

Good news: your last date has asked us to arrange another meeting. Please call ASAP.

Dear William,

Congratulations! Your last date has contacted us with a proposal of marriage.

>
```

The difference? Now, instead of an entire switch statement, you just have this:

```
(replies[r[i].type])(r[i]);
```

If you have to call the response functions at several places in the program, you won't have to copy a lot of code. And if you decide to add a new type and a new function, you can just add it to the array:

```
enum response_type {DUMP, SECOND_CHANCE, MARRIAGE, LAW_SUIT};

void (*replies[]) (response) = {dump, second_chance, marriage, law_suit};
```

Arrays of function pointers can make your code much easier to manage. They are designed to make your code *scalable* by making it shorter and easier to extend. Even though they are quite difficult to understand at first, function pointer arrays can really crank up your C programming skills.

You can add



BULLET POINTS

- Function pointers store the addresses of functions.
- The name of each function is actually a function pointer.
- If you have a function shoot (), then shoot and &shoot are both pointers to that function.
- You declare a new function pointer with return-type (*var-name) (param-types).
- If fp is a function pointer, you can call it with fp (params, ...).
- Or, you can use (*fp) (params,...). C will work the same way.

- The C Standard Library has a sorting function called qsort().
- qsort () accepts a pointer to a comparator function that can test for (in)equality.
- The comparator function will be passed pointers to two items in the array being sorted.
- If you have an array of data, you can associate functions with each data item using function pointer arrays.

Dumb Questions

Why is the function pointer array syntax so complex?

A: Because when you declare a function pointer, you need to say what the return and parameter types are. That's why there are so many parentheses.

This looks a little like the sort of object-oriented code in other languages. Is it?

A: It's similar. Object-oriented languages associate a set of functions (called *methods*) with pieces of data. In the same way, you can use function pointers to associate functions with pieces of data.

Hey, so does that mean that C is object oriented? Wow, that's awesome.

A: No. C is not object oriented, but other languages that are built on C, like Objective-C and C++, create a lot of their object-oriented features by using function pointers under the covers.

Make your functions streeeeetchy

Sometimes, you want to write C functions that are really powerful, like your find () function that could search using function pointers. But other times, you just want to write functions that are easy to use. Take the printf() function. The printf() function has one really cool feature that you've used: it can take a variable number of arguments:

```
printf("%i bottles of beer on the wall, ");
printf("Take one down and pass it around, ");
printf("%i bottles of beer on the wall\n", 98);

You can pass the printf() as many arguments as you need to print.
printf("%i bottles of beer on the wall, %i bottles of beer\n", 99, 99);
```

So how can YOU do that?

And you've got just the problem that needs it. Down in the Head First Lounge, they're finding it a little difficult to keep track of the drink totals. One of the guys has tried to make life easier by creating an enum with the list of cocktails available and a function that returns the prices for each one:

```
enum drink {
 MUDSLIDE, FUZZY NAVEL, MONKEY GLAND, ZOMBIE
double price (enum drink d)
  switch(d) {
  case MUDSLIDE:
   return 6.79;
  case FUZZY NAVEL:
   return 5.31;
  case MONKEY GLAND:
   return 4.82;
  case ZOMBIE:
    return 5.89;
  }
  return 0;
```

And that's pretty cool, if the Head First Lounge crew just wants the price of a drink. But what they want to do is get the price of a total drinks order:

```
The number of drinks

total (3, ZOMBIE, MONKEY_GLAND, FUZZY_NAVEL)

A list of the drinks in the order
Easy → price (ZOMBIE)
```


They want a function called total () that will accept a count of the drinks and then a list of drink names.




Variadic Functions Up Close


A function that takes a variable number of parameters is called a **variadic function**. The C Standard Library contains a set of **macros** that can help you create your own variadic functions. To see how they work, you'll create a function that can print out series of ints:

You can think of macros as a special type of function that can modify your source code.



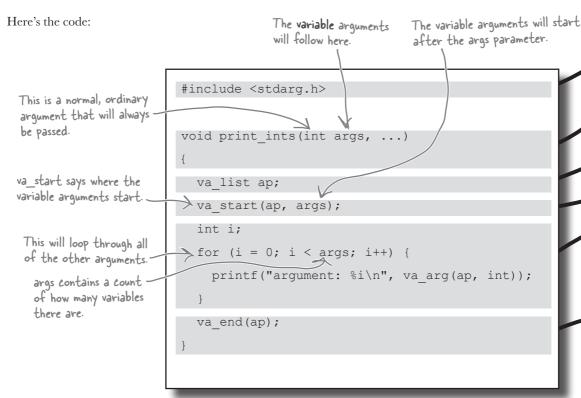

Let's break it down and take a look at it, step by step.



Include the stdarg.h header.

All the code to handle variadic functions is in *stdarg.h*, so you need to make sure you include it.

Tell your function there's more to come...

Remember those books where the heroine drags the guy through the bedroom and then the chapter ends "..."? Well, No, we don't read that "..." is called an *ellipsis*, and it tells you that something else is going to follow. In C, an ellipsis after the argument of a function means there are more arguments to come.

Create a va_list.

A va_list will be used

A va_list will be used to store the extra arguments that are passed to your function.

- Say where the variable arguments start.

 C needs to be told the name of the last fixed argument. In the case of our function, that'll be the args parameter.
- Then read off the variable arguments, one at a time. Now your arguments are all stored in the va_list, you can read them with va_arg. va_arg takes two values: the va_list and the type of the next argument. In your case, all of the arguments are ints.
- Finally...end the list.

After you've finished reading all of the arguments, you need to tell C that you're finished. You do that with the va end macro.

Now you can call your function.
Once the function is complete, you can call it:

Once the function is complete, you can call it:

print_ints(3, 79, 101, 32);

This will print out 79, 101, and 32 values.



Geek Bits

Functions vs. macros

A **macro** is used to rewrite your code before it's compiled. The macros you're using here (va_start, va_arg , and va_end) might look like functions, but they actually hide secret instructions that tell the *preprocessor* how to generate lots of extra smart code inside your program, just before compiling it.

there are no **Dumb Questions**

Wait, why are va_end and va_start called macros? Aren't they just normal functions?

A: No, they are designed to look like ordinary functions, but they actually are replaced by the preprocessor with other code.

And the preprocessor is?

A: The preprocessor runs just before the compilation step. Among other things, the preprocessor includes the headers into the code.

Can I have a function with just variable arguments, and no fixed arguments at all?

A: No. You need to have at least one fixed argument in order to pass its name to va_start.

What happens if I try to read more arguments from va_arg than have been passed in?

A: Random errors will occur.

Q: That sounds bad.

A: Yep, pretty bad.

What if I try to read an int argument as a double, or something?

A: Random errors will occur.



OK, now it's over to you. The guys in the Head First Lounge want to create a function that can return the total cost of a round of drinks, like this:



OK, now it's over to you. The guys in the Head First Lounge want to create a function that can return the total cost of a round of drinks, like this:

```
printf("Price is %.2f\n", total(3, MONKEY GLAND, MUDSLIDE, FUZZY NAVEL));
    This will print "Price is 16.9".
Using the price() from a few pages back, you were to complete the code for total():
         double total(int args, ...)
Don't worry if
           double total = 0;
your code doesn't
look exactly like ____ va_list ap;
this. There are
a few ways of
          va_start(ap, args);
writing it.
          int ii
          for(i = 0; i < args; i++) {
           enum drink d = va_arg(ap, enum drink);
           total = total + price(d);
          }
          va_end(ap);
           return total;
```



If you create a little test code to call the function, you can compile it and see what happens:

This is the test code.

```
main() {
  printf("Price is %.2f\n", total(2, MONKEY_GLAND, MUDSLIDE));
  printf("Price is %.2f\n", total(3, MONKEY_GLAND, MUDSLIDE, FUZZY_NAVEL));
  printf("Price is %.2f\n", total(1, ZOMBIE));
  return 0;
}
```

Your code works!

Now you know how to use variable arguments to make your code simpler and more intuitive to use.

> ./price_drinks
Price is 11.61
Price is 16.92
Price is 5.89
>

Yeah, baby! I could remember these even after one too many Monkey Glands...



BULLET POINTS

- Functions that accept a variable number of arguments are called variadic functions.
- To create variadic functions, you need to include the stdarg.h header file.
- The variable arguments will be stored in a va_list.
- You can control the va_list using va_start(), va_arg(), and va_end().
- You will need at least one fixed parameter.
- Be careful that you don't try to read more parameters than you've been given.
- You will always need to know the data type of every parameter you read.



you are here ▶

Your C Toolbox

You've got Chapter 7 under your belt, and now you've added advanced functions to your toolbox. For a complete list of tooltips in the book, see Appendix ii.




8 static and dynamic libraries





* Hot-swappable code *

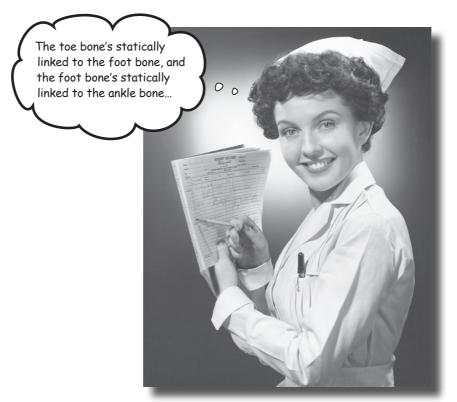

You've already seen the power of standard libraries.

Now it's time to use that power for your own code. In this chapter, you'll see how to create your own libraries and reuse the same code across several programs. What's more, you'll learn how to share code at runtime with dynamic libraries. You'll learn the secrets of the coding gurus. And by the end of the chapter, you'll be able to write code that you can scale and manage simply and efficiently.

Code you can take to the bank

Do you remember the encrypt() function you wrote a while back that encrypted the contents of a string? It was in a separate source code file that could be used by several programs:

```
#include "encrypt.h"

void encrypt(char *message)
{
   while (*message) {
     *message = *message ^ 31;
     message++;
   }
}
encrypt.c
```

Somebody else has written a function called checksum() that can be used to check if the contents of a string have been modified. Encrypting data and checking if data has been modified are both important for **security**. Separately, the two functions are useful, but together they could form the basis of a **security library**.

```
#include "checksum.h"

This function returns a number
based on the contents of a string.

int checksum(char *message);

int checksum(char *message);

while (*message) {
    c += c ^ (int) (*message);
    message++;
    }
    return c;
}

checksum.c
```

static and dynamic libraries

A security library? Hey, that's just what I'm looking for! The security at our bank is, well...kinda sloppy.



Head of security at the First Bank of Head First. He also cleans pools.

Sharpen your pencil

The guy at the bank has written a test program to see how the two functions work. He put all of the source into the same directory on his machine and then began to compile it.

He compiled the two security files into object files, and then wrote a test program:

```
#include <stdio.h>
#include <encrypt.h>
                                  File Edit Window Help
                                  > gcc -c encrypt.c -o encrypt.o
> gcc -c checksum.c -o checksum.o
#include <checksum.h>
int main()
  char s[] = "Speak friend and enter";
  encrypt(s);
                                                           encrypt() will encrypt your
  printf("Encrypted to '%s'\n", s);
                                                           data. If you call it again,
  printf("Checksum is %i\n", checksum(s));
                                                           it will decrypt it.
  encrypt(s);
  printf("Decrypted back to '%s'\n", s);
  printf("Checksum is %i\n", checksum(s));
  return 0;
```

And that's when the problems started. When he compiled the program, something went badly wrong...

```
File Edit Window Help

> gcc test_code.c encrypt.o checksum.o -o test_code
test_code.c:2:21: error: encrypt.h: No such file or directory
test_code.c:3:22: error: checksum.h: No such file or directory
>
```

Using a pencil, highlight which command or code made the compile fail.



The problem is in the test program. All of the source files are stored in the same directory, but the test program includes the encrypt.h and checksum.h headers using angle brackets (< >).

```
#include <stdio.h>
#include <encrypt.h>
#include
         <checksum.h>
int main()
  char s[] = "Speak friend and enter";
  encrypt(s);
  printf("Encrypted to '%s'\n", s);
  printf("Checksum is %i\n", checksum(s));
  encrypt(s);
  printf("Decrypted back to '%s'\n", s);
  printf("Checksum is %i\n", checksum(s));
  return 0;
```

Angle brackets are for standard headers

If you use angle brackets in an #include statement, the compiler won't look for the headers in the current directory; instead, it will search for them in the **standard** header directories.

To get the program to compile with the **local** header files, you need to switch the angle brackets for simple quotes (" "):

Now the code compiles correctly. It encrypts the test string to something unreadable.

```
stdio.h is
stored in
             #include <stdio.h>
one of the
             #include "encrypt.h"
standard
             #include "checksum.h"
header
directories.
          encrypt.h and checksum.h are in
          the same directory as the program.
```

The checksum returns different values for different strings. Chapter 8

File Edit Window Help <> gcc test code.c encrypt.o checksum.o -o test code ./test_code Encrypted to 'Loz~t?ymvzq{?~q{?zqkzm' Checksum is 89561741 Decrypted back to 'Speak friend and enter' Checksum is 89548156 Calling the encrypt() function a second time returns the original string.

www.it-ebooks.info

354

Where are the standard header directories?

So, if you include headers using angle brackets, where does the compiler go searching for the header files? You'll need to check the documentation that came with your compiler, but typically on a Unix-style system like the Mac or a Linux machine, the compiler will look for the files under these directories:

And if you're using the MinGW version of the gcc compiler, it will normally look here:

C:\MinGW\include

>/usr/local/include / It will check /usr/local/include first.

/usr/include

/usr/local/include is often used for header files for third-party libraries.

/usr/include is normally used for operating system header files.

But what if you want to share code?

Sometimes you want to write code that will be available to lots of programs, in different folders, all over your computer. What do you do then?

> Yeah, I gotta get security added to all these different programs. I don't want a separate copy of the security code for each one...

There are two sets of files that you want to share between programs: the .h header files and the .o object files. Let's look at how you can share each type.



Sharing .h header files

There are a few ways of sharing header files between different C projects:




If you copy your header files into one of the standard directories like /usr/local/include, you can include them in your source code using angle brackets.

#include <encrypt.h> Vou can use angle brackets if your header files are in a standard directory.

Put the full pathname in your include statement.

If you want to store your header files somewhere else, such as <code>/my_header_files</code>, you can add the directory name to your include statement:

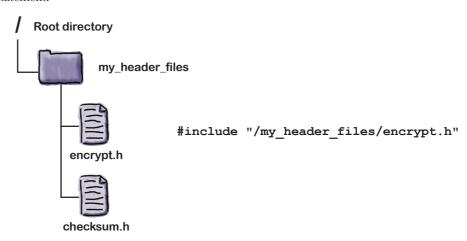

3 You can tell the compiler where to find them.

The final option is to tell the compiler where it can find your header files. You can do this with the **-I** option on gcc:

The -I option tells the gcc compiler that there's another place where it can find header files. It will still search in all the standard places, but first it will check the directory names in the -I option.

This tells the compiler to look in /my_header_files as well as the standard directories.

Share .o object files by using the full pathname

Now you can always put your .o object files into some sort of *shared directory*. Once you've done that, you can then just add the full path to the object files when you're compiling the program that uses them:

gcc -I/my_header_files test_code.c
 /my_object_files/encrypt.o
 /my_object_files/checksum.o -o test_code

Using the full pathname to the object files means you don't need a separate copy for each C project. /my_object_files is like a central store for your object files.

If you compile your code with the *full pathname* to the object files you want to use, then *all* your C programs can share the same *encrypt.o* and *checksum.o* files.

Hmmm... That's OK if I just have one or two object files to share, but what if I have a lot of object files? I wonder if there's some way of telling the compiler about a bunch of them...

Yes, if you create an archive of object files, you can tell the compiler about a whole set of object files all at once.

An **archive** is just a bunch of object files wrapped up into a single file. By creating a single archive file of all of your security code, you can make it a lot easier to share the code between projects.

Let's see how to do it...




357

An archive contains .o files

Ever used a .zip or a .tar file? Then you know how easy it is to create a file that contains other files. That's exactly what a .a archive file is: a file containing other files

Open up a terminal or a command prompt and change into one of the *library* directories. These are the directories like <code>/usr/lib</code> or <code>C:\MinGW\lib</code> that contain the library code. In a library directory, you'll find a whole bunch of <code>.a</code> archives. And there's a command called <code>nm</code> that you can use to look inside them:

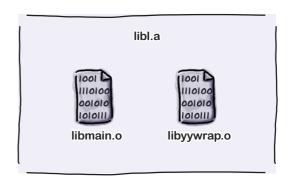


```
You might not have a libl a on your machine, but
             -you can try the command on any other .a file.
This is an archive File Edit Window Help SilenceInTheLibrary
called libl.a. -
            > nm libl.a
                libl.a(libmain.o):
                 0000000000003a8
                                         EH frame0
                                          exit
                 000000000000000
                 0000000000003c0
                                         _main.eh
                                          yylex
                 libl.a(libyywrap.o):
0000000000000350 s E
                0000000000000000 T
                                         _yywrap
                000000000000368
                                          _yywrap.eh
```

The nm command lists the **names** that are stored inside the archive. The *libl.a* archive shown here contains two object files: *libmain.o* and *libyywrap.o*. What these two object files are used for doesn't really matter; the point is that you can take a whole set of object files and turn them into a single archive file that you can use with gcc.

Before you see how to compile programs using .a, let's see how to store our *encrypt.o* and *checksum.o* files in an archive.

Create an archive with the ar command...

The archive command (ar) will store a set of object files in an archive file:



The c means that the archive will be created without any feedback.

This is the name of the a file to create

Did you notice that all of the .a files have names like *lib*<*something*>.*a*? That's the standard way of naming archives. The names begin with lib because they are static libraries. You'll see what this means later on.



If you don't name them this way, your compiler will have problems tracking them down.

...then store the .a in a library directory

Once you have an archive, you can store it in a library directory. Which library directory should you store it in? It's up to you, but you have a couple of choices:

You can put your .a file in a standard directory like /usr/local/lib.

Some coders like to install archives into a standard directory once they are sure it's working. On Linux, on Mac, and in Cygwin, the /usr/local/lib directory is a good choice because that's the directory set aside for your own local custom libraries.

Put the .a file in some other directory.

If you are still developing your code, or if you don't feel comfortable installing your code in a system directory, on most machines, you need to be an you can always create your own library directory. For example: /my_lib.

administrator to put files in /usr/local/lib.

Finally, compile your other programs

The whole point of creating a library archive was so you could use it with other programs. If you've installed your archive in a standard directory, you can compile your code using the -1 switch:

Remember to list your source for an archive called libhfsecurity.a.

gcc test_code.c -lhfsecurity -o test_code

| Jo you need a -I option? |
| It depends on where you put your headers.
| You're using several archives, you can set several -l options.

Can you see now why it's so important to name your archive *lib*<*something*>.a? The name that follows the -1 option needs to match *part of the archive name*. So if your archive is called *libawesome.a*, you can compile your program with the -lawesome switch.

But what if you put your archive somewhere else, like /my_lib? In that case, you will need to use the -L option to say which directories to search:

So, I need to look for libhfsecurity.a starting in the /my_lib directory.



gcc test_code.c -L/my_lib -lhfsecurity -o test_code



Geek Bits

The contents of the library directories can be *very* different from one machine to another. Why is that? It's because different operating systems have different *services* available. Each of the *.a* files is a separate library. There'll be libraries for connecting to the network, or creating GUI applications.

Try running the nm command on a few of the .a files. A lot of the names listed in each module will match compiled functions that you can use:

The nm command will tell you the name of each .o object file and then list the names that are available within the object file. If you see a **T** next to a name, that means it's the name of a function within the object file.



Make Magnets

The security guy is having trouble compiling one of the bank programs against the new security library. He has his source code as well as the encrypt and checksum source code in the same directory. For now, he wants to create the *libhfsecurity.a* archive in the same directory and then use it to compile his own program. Can you help him fix his makefile?

Note: the bank vault program uses these #include statements:

#include <encrypt.h>
#include <checksum.h>

This is the makefile:

encrypt.o: encrypt.c
gccencrypt.c -o encrypt.o
checksum.o: checksum.c
gccchecksum.c -o checksum.o
libhfsecurity.a: encrypt.o
ar -rcsencrypt.o
bank_vault: bank_vault.c
gcc -I -L -o bank_vault
-c checksum.o
libhfsecurity.a bank_vault.c checksum.o -lhfsecurity . libhfsecurity.a
/usr/lib /usr/local/include -rcs /usr/local/lib -rcs


361



Make Magnets Solution

The security guy is having trouble compiling one of the bank programs against the new security library. He has his source code, as well as the encrypt and checksum source code in the same directory. For now, he wants to create the *libhfsecurity.a* archive in the same directory and then use it to compile his own program. You were to help him fix his makefile.

Note: the bank vault program uses these #include statements:

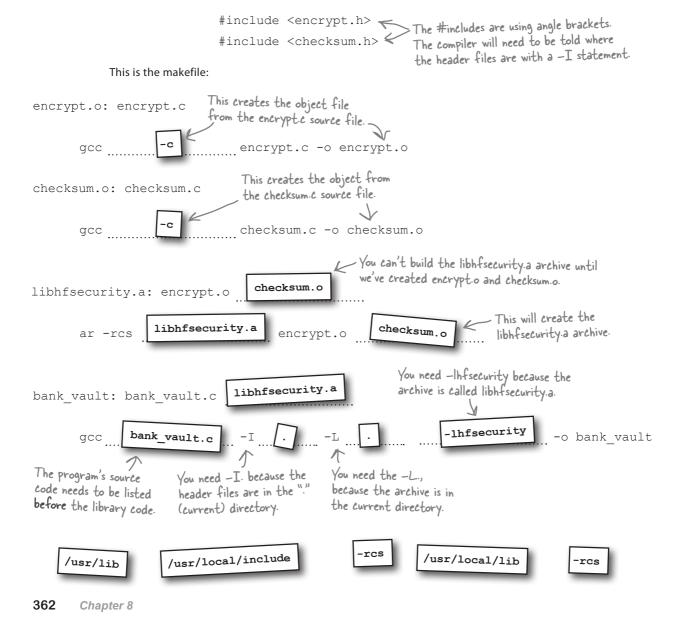



BULLET POINTS

- Headers in angle brackets (< >) are read from the standard directories.
- Examples of standard header directories are /usr/include and C:\MinGW\include.
- A library archive contains several object files.
- You can create an archive with ar -rcs libarchive.a file0.o file1.o....
- Library archive names should begin *lib.* and end .a.
- If you need to link to an archive called libfred.a, use -lfred.
- The -L flag should appear *after* the source files in the gcc command.

there are no **Dumb Questions**

How do I know what the standard library directories are on my machine?

A: You need to check the documentation for your compiler. On most Unix-style machines, the library directories include /usr/lib and /usr/local/lib.

When I try to put a library archive into my /usr/lib directory, it won't let me. Why is that?

A: Almost certainly security. Many operating systems will prevent you from writing files to the standard directories in case you accidentally break one of the existing libraries.

Is the ar format the same on all systems?

A: No. Different platforms can have slightly different archive formats. And the object code the archive contains will be completely different for different operating systems.

Q: If I've created a library archive, can I see what's inside it?

A: Yes. ar -t < filename > will list the contents of the archive.

Are the object files in the archive linked together like an executable?

A: No. The object files are stored in the archive as distinct files.

Can I put any kind of file in a library archive?

A: No. The ar command will check the file type before including it.

Can I extract a single object file from an archive?

A: Yes. To extract the encrypt.o file from libhfsecurity.a, use ar -x libhfsecurity.a encrypt.o.

Q: Why is it called "static" linking?

Because it can't change once it's been done. When two files are linked together statically, it's like mixing coffee with milk: you can't separate them afterward.

Should I use the HF security library to secure the data at my bank?

A: That's probably not a good idea.



Head First: Linker, thank you so much for making time for us today.

Linker: It's a pleasure.

Head First: I'd like to begin by asking if you ever feel overlooked by developers. Perhaps they don't understand exactly what it is you do?

Linker: I'm a very quiet person. A lot of people don't talk to me directly with the ld command.

Head First: 1d?

Linker: Yes? See, that's me.

Head First: That's a lot of options on my screen.

Linker: Exactly. I have a lot of options. A lot of ways of joining programs together. That's why some people just use the gcc command.

Head First: So the compiler can link files together?

Linker: The compiler works out what needs to be done to join some files together and then calls me. And I do it. Quietly. You'd never know I was there.

Head First: I do have another question...

Linker: Yes?

Head First: I hate to sound foolish, but what exactly is it you do?

Linker: That's not a foolish question. I stitch pieces of compiled code together, a bit like a telephone

operator.

Head First: I don't follow.

Linker: The old telephone operators would patch calls from one location to another so the two parties could talk. An object file is like that.

Head First: How so?

Linker: An object file might need to call a function that's stored in some other file. I link together the point in one file where the function call is made to the point in another file where the function lives.

Head First: You must have a lot of patience.

Linker: I like that kind of thing. I make lace in my

spare time.

Head First: Really?

Linker: No.

Head First: Linker, thank you.

The Head First Gym is going global

The guys at the Head First Gym are going to spread their business **worldwide**. They are opening up outlets on four continents, and each one will contain their trademarked *Blood, Sweat, and Gears* TM gym equipment. So they're writing software for their ellipticals, treadmills, and exercise bikes. The software will read data from the sensors that are fitted on each device and then display information on a small LCD screen that will tell users what distance they've covered and how many calories they've burned.



That's the plan, anyway, but the guys need a little help. Let's look into the code in a little more detail.

Calculating calories

The team is still working on the software, but they've got one of the key modules ready. The hfcal library will generate the main data for the LCD display. If the code is told the user's weight, the virtual distance she's traveled on the machine, and then a special coefficient, it will generate the basic LCD details on the Standard Output:


```
#include <stdio.h>
#include <hfcal.h> The hfcal.h header file just contains a declaration of the display_calories() function.
void display calories (float weight, float distance, float coeff)
                                                     The weight is in pounds.
  printf("Weight: %3.2f lbs\n", weight);
  printf("Distance: %3.2f miles\n", distance); 
The distance is in miles.
  printf("Calories burned: %4.2f cal\n", coeff * weight * distance);
                                                                     This code will go into hfcal.c a file called hfcal.c.
```

The team hasn't yet written the main code for each piece of equipment. When they do, there will be separate programs for the ellipticals, treadmills, and exercise bikes. Until then, they've created a test program that will call the hfcal.c code with some example data:

> The LCD display will capture the Standard Output. WeiGHT: 115.20 LBS Distance: 11.30 miles CALORIES BURHED: 1028.39 CAL

#include <stdio.h> #include <hfcal.h> The test user weighs 115.2 Pounds and has done 11.3 int main() miles on the elliptical. display_calories(115.2, return 0; For this machine, the coefficient is 0.79 This is what the display elliptical.c This is the test code. looks like for the test program.

366 Chapter 8



Now that you've seen the source code for the test program and the *hfcal* library, it's time to build the code.

Let's see how well you remember the commands.

1. Start by creating an object file called <i>hfcal.o</i> . The <i>hfcal.h</i> header is going to be stored in <i>./includes</i> :			
2. Next, you need to create an object file called <i>elliptical.o</i> from the <i>elliptical.c</i> test program:			
3. Now, you need to create an archive library from <i>hfcal.o</i> and store it in ./libs:			
4. Finally, create the elliptical executable using <i>elliptical.o</i> and the <i>hfcal</i> archive:			



Now that you've seen the source code for the test program and the *hfcal* library, it's time to build the code.

Let's see how well you remembered the commands.

1. Start by creating an object file called hfcal.o. The hfcal.h header is going to be stored in ./includes: The hfcal.e program needs to know where the header file is. gee.—I./includes.—e. hfcal.e.—o. hfcal.o. Did you remember to add the —I flag? —c means "just create the object file; don't link it."				
2. Next, you need to create an object file called <i>elliptical.o</i> from the <i>elliptical.c</i> test program:				
gcc –I./includes –c elliptical.c –o elliptical.o				
Again, you need to tell the compiler that the headers are in ./includes.				
3. Now, you need to create an archive library from hfcal.o and store it in /libs: The library needs to be named liba. ar -res ./libs/libhfcal.a hfcal.o The archive needs to go into the ./libs directory.				
4. Finally, create the elliptical executable using elliptical.o and the hfcal archive: -lhfcal tells the compiler to look for libhfcal.a. get elliptical.o -L./libs -lhfcal -o elliptical				
You're building the program using ——L./libs tells the compiler where the library is stored. elliptical.o and the library.				
Now that you've built the elliptical Program, you can run it on the console: File Edit Window Help SilenceInTheLibrary > ./elliptical Weight: 115.20 lbs Distance: 11.30 miles Calories burned: 1028.39 cal >				

But things are a bit more complex...

Turns out, there's a problem. The Head First Gyms are expanding *everywhere*, in different countries that use different languages and different measures. For example, in England, the machines need to report information in **kilograms** and **kilometers**:



The gyms have lots of different types of equipment. If they have 20 different types of machines, and they have gyms in 50 countries, that means there will be 1,000 different versions of the software. That's a lot of different versions.

And then there are other problems too:

- If an engineer upgrades the sensors used on a machine, she might need to upgrade the code that talks to them.
- If the displays ever change, the engineers might need to change the code that generates the output.
- Plus many, many other variations.


If you think about it, you get the same kinds of problems when you write any software. Different machines might require different *device driver code*, or they might need to talk to different *databases* or different *graphical user interfaces*. You probably won't be able to build a version of your code that will work on *every* machine, so what should you do?






Programs are made out of lots of pieces...

You've already seen that you can build programs using different pieces of **object code**. You've created .o files and .a archives, and you've linked them together into single executables.

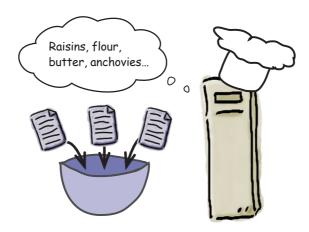

...but once they're linked, you can't change them

The problem is that if you build programs like this, they are **static**. Once you've created a single executable file from those separate pieces of object code, you really have *no way* of changing any of the ingredients without rebuilding the whole program.

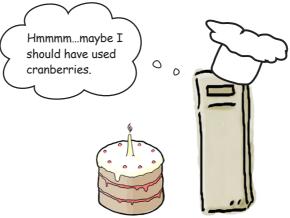

The program is just a large chunk of object code. There's no way to separate the **display code** from the **sensor code**; it's all lost in the mix.


370 Chapter 8

Wouldn't it be dreamy if there were a way to run a program using switchable pieces of object code?
But I guess that's just a fantasy...




Dynamic linking happens at runtime


The reason you can't change the different pieces of object code in an executable file is because, well, they are all contained in a single file. They were **statically linked** together when the program was compiled.

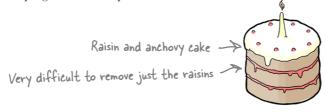

But if your program wasn't just a single file—if your program was made up of lots of separate files that only joined together when the program was run—you would avoid the problem.

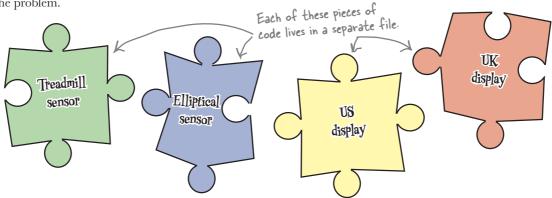

The trick, then, is to find a way of storing pieces of object code in separate files and then *dynamically linking them together* only when the program runs.

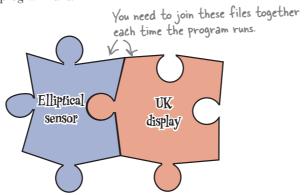


Can you link .a at runtime?

So you need to have separate files containing separate pieces of object code. But you've already got separate files containing object code: the .o object files and the .a archive files. Does that mean you just need to tell the computer not to link the .o files until you run the program?

Sadly, it's not that easy. Simple object files and archives don't have quite enough information in them to be linked together at runtime. There are other things our *dynamic library files* will need, like the names of the other files they need to link to.

Dynamic libraries are object files on steroids

So, dynamic libraries are *similar* to those .0 object files you've been creating for a while, but they're not quite the same. Like an archive file, a dynamic library can be built from several .0 object files, but unlike an archive, the object files are properly linked together in a dynamic library to form a single piece of object code.

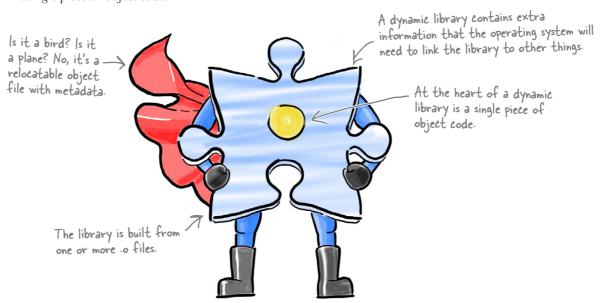

So how do you create your own dynamic libraries? Let's see.

First, create an object file

If you're going to convert the *hfcal.c* code into a dynamic library, then you need to begin by compiling it into a .0 object file, like this:

Did you spot the difference? You're creating the *hfcal.o* exactly the same as before *except* you're adding an extra flag: **-fPIC**. This tells gcc that you want to create **position-independent code**. Some operating systems and processors need to build libraries from position-independent code so that they can decide at runtime where they want to load it into memory.

Now, the truth is that on *most* systems you don't need to specify this option. Try it out on your system. If it's not needed, it won't do any harm.

Position-independent code can be moved around in memory.





Geek Bits

So, what is position-independent code?

Position-independent code is code that doesn't mind where the computer loads it into memory. Imagine you had a dynamic library that expected to find the value of some piece of global data 500 bytes away from where the library is loaded. Bad things would happen if the operating system decided to load the library somewhere else in memory. If the compiler is told to create position-independent code, it will avoid problems like this.

Some operating systems, like Windows, use a technique called **memory mapping** when loading dynamic libraries, which means all code is effectively position-independent. If you compile your code on Windows, you might find that gcc will give you a warning that the -fPIC option is not needed. You can either remove the -fPIC flag, or ignore the warning. Either way, your code will be fine.

What you call your dynamic library depends on your platform

Dynamic libraries are available on most operating systems, and they all work in pretty much the same way. But what they're called can vary a lot. On Windows, dynamic libraries are usually called **dynamic link libraries** and they have the extension .dll. On Linux and Unix, they're shared object files (.so), and on the Mac, they're just called **dynamic libraries** (.dylib). But even though the files have different extensions, you can create them in very similar ways:

```
gcc -shared hfcal.o -o

C:\Libs\hfcal.dll \( \simeq \)

/libs/libhfcal.dll.a \( \simeq \)

/libs/libhfcal.so \( \simeq \)

Linux or Unix
                                                  libs/libhfcal.dylib 

Mac
```

The -shared option tells gcc that you want to convert a .o object file into a dynamic library. When the compiler creates the dynamic library, it will store the name of the library inside the file. So, if you create a library called libhfcal.so on a Linux machine, the libhfcal.so file will remember that its library name is hfcal. Why is that important? It means that if you compile a library with one name, you can't just rename the file afterward.

If you need to rename a library, recompile it with the new name.

Compiling the elliptical program

Once you've created the dynamic library, you can use it just like a static library. So, you can build the elliptical program like this:

```
gcc -I\include -c elliptical.c -o elliptical.o
gcc elliptical.o -L\libs -lhfcal -o elliptical
```

Even though these are the same commands you would use if *hfcal* were a static archive, the compile will work differently. Because the library's dynamic, the compiler won't include the library code into the executable file. Instead, it will insert some placeholder code that will track down the library and link to it at runtime.

Now, let's see if the program runs.



On some older Mac systems, the -shared flag is not available.

But don't worry, on those machines, if you just replace it with -dynamiclib, everything will work exactly the same way.

Library names in MinGW and Cygwin

Both MinGW and Cygwin let you use several name formats for dynamic libraries. The hfcal library can have any of these names:

libhfcal.dll.a

libhfcal.dll

hfcal.dll

375



You've created the dynamic library in the /libs directory and built the elliptical test program. Now you need to run it. Because *hfcal* isn't in one of the standard library directories, you'll need to make sure the computer can find the library when you run the program.

On a Mac

On the Mac, you can just run the program. When the program is compiled on the Mac, the full path to the /libs/libhfcal.dylib file is stored inside the executable, so when the program starts, it knows exactly where to find the library.

```
File Edit Window Help I'mAMac

> ./elliptical
Weight: 115.20 lbs
Distance: 11.30 miles
Calories burned: 1028.39 cal
>
```

On Linux

That's not quite what happens on Linux.

On Linux, and most versions of Unix, the compiler just records the filename of the *libhfcal.so* library, *without* including the path name. That means if the library is stored outside the standard library directories (like /usr/lib), the program won't have any way of finding the hfcal library. To get around this, Linux checks additional directories that are stored in the LD_LIBRARY_PATH variable. If you make sure your library directory is added to the LD_LIBRARY_PATH—and if you make sure you **export** it—then elliptical will find libhfcal.so.

```
You need to make sure
                                                      the variable is exported.
 On Linux, you need to set
                              File Edit Window Help I'mLinux
 the LD_LIBRARY PATH
                               > export LD LIBRARY PATH=$LD LIBRARY PATH:/libs
 variable so the program
                               > ./elliptical
 can find the library.
                               Weight: 115.20 lbs
                               Distance: 11.30 miles
                               Calories burned: 1028.39 cal
   There's no need to do this
    if the library is somewhere
    standard, like /usr/lib
                                                                            Linux
376
       Chapter 8
```

www.it-ebooks.info

On Windows

Now let's take a look at how to run code that's been compiled using the Cygwin and MinGW versions of the gcc compiler. Both compilers create Windows DLL libraries and Windows executables. And just like Linux, Windows executables store the name of the *hfcal* library *without* the name of the directory where it's stored.

But Windows doesn't use a LD_LIBRARY_PATH variable to hunt the library down. Instead, Windows programs look for the library in the current directory, and if they don't find it there, the programs search for it using the directories stored in the PATH variable.

Using Cygwin

If you're compiled the program using Cygwin, you can run the program from the $bash\ shell\ like$ this:

```
File Edit Window Help I'mCygwin

> PATH="$PATH:/libs"

> ./elliptical
Weight: 115.20 lbs
Distance: 11.30 miles
Calories burned: 1028.39 cal

>
```

Using Min&W

And if you've compiled the program using the MinGW compiler, you can run it from the *command prompt* like this:

```
File Edit Window Help I'mMinGW

C:\code> PATH="%PATH%:C:\libs"

C:\code> ./elliptical

Weight: 115.20 lbs

Distance: 11.30 miles


Calories burned: 1028.39 cal

C:\code>
```

Does this seem a little complex? It is, which is why most programs that use dynamic libraries store them in one of the standard directories. That means on Linux and the Mac, they are normally in directories like /usr/lib or /usr/local/lib; and in Windows, developers normally keep .DLLs stored in the same directory as the executable.

Long Exercise

The guys at the Head First Gym are about to ship a treadmill over to England. The embedded server is running Linux, and it already has the US code installed.

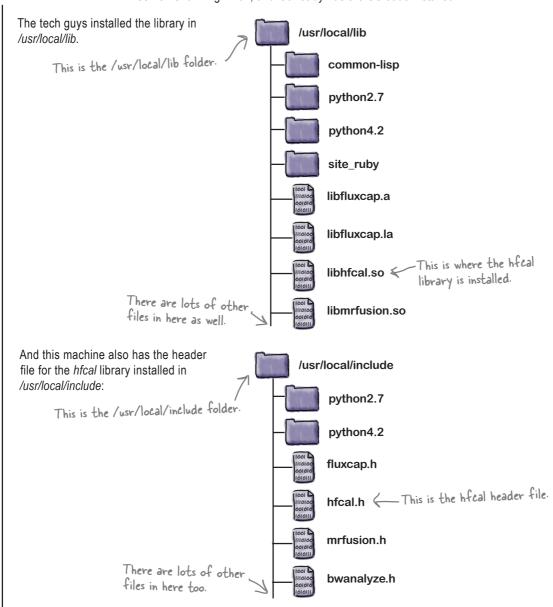

The tech guys like to install libraries using these directories because it's a little more standard. The machine is all configured for use in the US, but things need to change.

The system needs to be updated for use in the gym it is being shipped to in England. That means the treadmill's display code needs to be switched from miles and pounds to kilometers and kilograms.

```
This is the code for the UK gym.
```

This file is in the /home/ebrown directory.

The software that's already installed on the machine needs to use this new version of the code. Because the applications connect to this code as a dynamic library, all you need to do is compile it into the /usr/local/lib directory.


Assuming that you are already in the same directory as the *hfcal_UK.c* file and that you have write permissions on all the directories, what commands would you need to type to compile this new version of the library?

If the treadmill's main application is called /opt/apps/treadmill, what would you need to type in to run the program?				

hfcal UK.c



The guys at the Head First Gym are about to ship a treadmill over to England. The embedded server is running Linux, and it already has the US code installed.

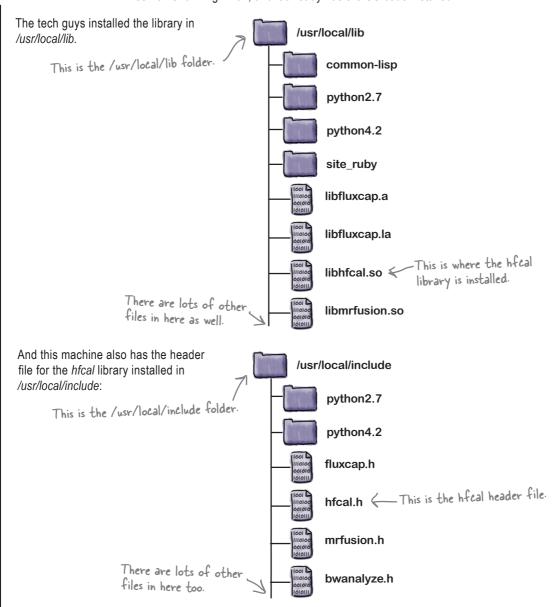

The tech guys like to install libraries using these directories because it's a little more standard. The machine is all configured for use in the US, but things need to change.

The system needs to be updated for use in the gym it is being shipped to in England. That means the treadmill's display code needs to be switched from miles and pounds to kilometers and kilograms.

```
#include <stdio.h>
#include <hfcal.h>

void display_calories(float weight, float distance, float coeff)

{
    printf("Weight: %3.2f kg\n", weight / 2.2046);
    printf("Distance: %3.2f km\n", distance * 1.609344);
    printf("Calories burned: %4.2f cal\n", coeff * weight * distance);
}

hfcal UK.c
```

The software that's already installed on the machine needs to use this new version of the code. Because the applications connect to this code as a dynamic library, all you need to do is compile it into the /usr/local/lib directory.

Assuming that you are already in the same directory as the *hfcal_UK.c* file and that you have write permissions on all the directories, what commands would you need to type to compile this new version of the library?

```
You need to compile the _____gcc -c -fPIC hfcal UK.c -o hfcal.o _____ option, because the header file source code to an object file.

Then you need to convert the ____ gcc -shared hfcal.o -o /usr/local/lib/libhfcal.so object file to a shared object.
```

If the treadmill's main application is called /opt/apps/treadmill, what would you need to type in to run the program?

```
You don't need to set the LD_LIBRARY_PATH

/opt/apps/treadmill 
variable because the library is in a standard directory.
```

Did you spot that the library and headers had been installed in standard directories? That meant you didn't have to use a -I flag when you were compiling the code, and you didn't have to set the LD_LIBRARY_PATH variable when you were running the code.






The treadmill application starts when the machine boots up, so after using the machine for a while the display shows this:


> Weight: 117.40 LBS Distance: 9.40 miles Calories Burned: 750.42 cal

The treadmill program on the US. machine is dynamically linking itself to the version of the *libhfcal.so* library that was compiled from the US version of the hfcal program.

But what about the treadmill in England?

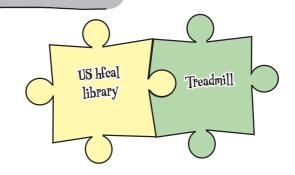

382 Chapter 8

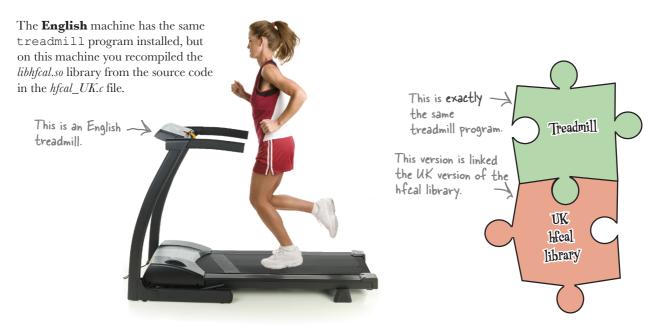

When the runner has been on the treadmill for a similar distance, the display looks like this:



It worked.

Even though the treadmill program was never recompiled, it was able to pick up the code from the new library **dynamically**.

Dynamic libraries make it easier to change code at **runtime**. You can update an application without needing to recompile it. If you have several programs that share the same piece of code, you can update them *all at the same time*. Now that you know how to create dynamic libraries, you've become a much more powerful C developer.

static and dynamic



$\label{thm:constraint} Tonight's \ talk: \ \textbf{Two renowned proponents of modular software discuss the pros and cons of static and dynamic linking.}$

Static:	Dynamic:
Well, I think we can both agree that creating code in smaller modules is a good idea.	
	Absolutely.
It makes so much sense, doesn't it?	
	Yes.
Keeps the code manageable.	
	Yes.
Nice, large programs.	
	Large?
Yes. Nice BIG programs with their dependencies fixed.	
	That doesn't sound like a good idea.
What do you mean, old friend?	
	I think programs should be made of lots of small files that link together only when the program is run.
Well <laughs>that's a verybut no, seriously.</laughs>	
	I'm being serious.
What? Lots of separate files? Joined together willy-nilly?!	
	I prefer the term <i>dynamically</i> to willy-nilly.
But that'sthat'sa recipe for <i>chaos</i> !	
	It means I can change my mind later.
You should get things right in the first place.	
	But that's not always possible. All large programs should use dynamic linking.

Static:

All programs?

What about the Linux kernel, hmmm? That large enough? And I believe that's...

Static linking might not be as *loose* and *informal*, but you know what? Static programs are simple to use. Single files. Want to install one? Just copy the executable. No need for DLL hell.

I can't change your mind?

So, you're telling me your mind is statically linked?

Dynamic:

I think so.

...statically linked. Yeah, I know. That's your one.

Look, we'll just have to agree to disagree.

No.



BULLET POINTS

- Dynamic libraries are linked to programs at runtime.
- Dynamic libraries are created from one or more object files.
- On some machines, you need to compile them with the -fPIC option.
- -fPIC makes the object code position-independent.
- You can skip -fPIC on many systems.

- The -shared compiler option creates a dynamic library.
- Dynamic libraries have different names on different systems.
- Life is simpler if your dynamic libraries are stored in standard directories.
- Otherwise, you might need to set PATH and LD_LIBRARY_PATH variables.

Dumb Questions

Why are dynamic libraries so different on different operating systems?

A: Operating systems like to optimize the way they load dynamic libraries, so they've each evolved different requirements for dynamic libraries.

I tried to change the name of my library by renaming the file, but the compiler couldn't find it anymore. Why not?

A: When the compiler creates a dynamic library, it stores the name of the library inside the file. If you rename the file, it will then have the wrong name inside the file and will get confused. If you want to change its name, you should recompile the library.

Why does Cygwin support so many different naming conventions for dynamic library files?

Cygwin makes it easy to compile Unix software on a Windows machine. Because Cygwin creates a Unix-style environment, it borrows a lot of Unix conventions. So it prefers to give libraries a extensions, even if they're dynamic DLLs.

Are Cygwin dynamic libraries real DLLs?

A: Yes. But because they depend on the Cygwin system, you'll need to do a little work before non-Cygwin code can use them

Why does the MinGW compiler support the same dynamic library name format as Cygwin?

A: Because the two projects are closely associated and share a lot of code. The big difference is that MinGW programs can run on machines that don't have Cygwin installed.

Why doesn't Linux just store library pathnames in executables? That way, you wouldn't need to set LD LIBRARY PATH.

A: It was a design choice. By not storing the pathname, it gives you a lot more control over which version of a library a program can use—which is great when you're developing new libraries.

Why doesn't Cygwin use LD_LIBRARY_PATH to find libraries?

A: Because it needs to use Windows DLLs. Windows DLLs are loaded using the PATH variable.

Which is better? Static or dynamic linking?

A: It depends. Static linking means you get a small, fast executable file that is easier to move from machine to machine. Dynamic linking means that you can configure the program at runtime more.

If different programs use the same dynamic library, does it get loaded more than once? Or is it shared in memory?

A: That depends on the operating system. Some operating systems will load separate copies for each process. Others load shared copies to save memory.

Are dynamic libraries the best way of configuring an application?

A: Usually, it's simpler to use configuration files. But if you're going to connect to some external device, you'd normally need separate dynamic libraries to act as drivers.

Your C Toolbox

You've got Chapter 8 under your belt, and now you've added static and dynamic libraries to your toolbox. For a complete list of tooltips in the book,

see Appendix ii.

#include
<> looks in
standard
directories such
as /usr/include.

The ar command creates a library archive of object files. -l<name> links
to a file in
standard
directories such
as /usr/lib.

-I<name> adds
a directory
to the list of
standard include
directories.

-L<name> adds

a directory

to the list of standard library directories.

Library archives have gcc -shared names like converts object files libsomething.a. into dynamic Library archives are libraries. Dynamic libraries are statically linked at linked. runtime. Dynamic libraries have Dynamic different names libraries have on different .so, .dylib, operating systems. .dll, or .dll.a extensions.







CLab 2

OpenCV

This lab gives you a spec that describes a program for you to investigate and build, using the knowledge you've gained over the last few chapters.

This project is bigger than the ones you've seen so far. So read the whole thing before you get started, and give yourself a little time. And don't worry if you get stuck; there are no new C concepts in here, so you can move on in the book and come back to the lab later.

It's up to you to finish the job, but we won't give you the code for the answer.






The spec: turn your computer into an intruder detector

Imagine if your computer could keep an eye on your house while you're out and tell you who's been prowling around. Well, using its default webcam and the cleverness of *OpenCV*, it can!

Here's what you're going to create.

The intruder detector

Your computer will constantly survey its surroundings using its webcam. When it detects movement, it will write the current webcam image to a file. And if you store this file on a network drive or use a file synchronization service such as Dropbox, you'll have instant evidence of any intruders.

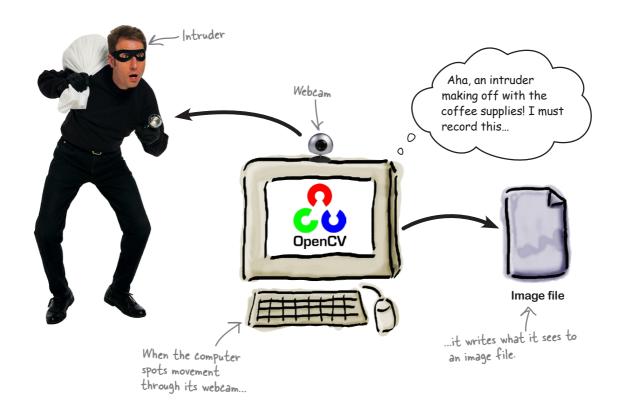

www.it-ebooks.info

OpenCV

OpenCV

OpenCV is an open source computer vision library. It allows you to take input from your computer camera, process it, and analyze real-time image data and make decisions based on what your computer sees. What's more, you can do all of this using C code.

OpenCV is available on Window, Linux, and Mac platforms.

You can find the OpenCV wiki here:

http://opencv.willowgarage.com/wiki/FullOpenCVWiki


Installing OpenCV

You can install OpenCV on Windows, Linux, or Mac. The install guide is here, and includes links to the latest stable releases:

http://opencv.willowgarage.com/wiki/InstallGuide

Once you've installed OpenCV, you should see a folder on your computer labeled *samples*. It's worth taking a look at these. There are also links to tutorials on the OpenCV wiki. You'll need to investigate OpenCV in order to complete this lab.

If you want to get deep into OpenCV, we recommend the book *Learning OpenCV* by Gary Bradski and Adrian Kaehler (O'Reilly).

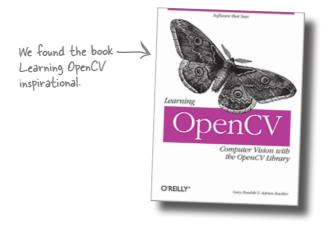

What your code should do

Your C code should do the following.

Take input from your computer camera

You need to work with real-time data that comes in from your computer camera, so the first thing you need to do is capture that data. There's an OpenCV function that will help you with this called cvCreateCameraCapture (0). It returns a pointer to a CvCapture struct. This pointer is your hotline to the webcam device, and you'll use it to grab images.

Remember to check for errors in case your computer can't find a camera. If you can't contact the webcam, you'll receive a NULL pointer from cvCreateCameraCapture(0).

Grab an image from the webcam

You can read the latest image from the webcam using the cvQueryFrame () function. It takes the CvCapture pointer as a parameter. The cvQueryFrame () function returns a pointer to the latest image, so your code will probably start with something a little like this:



Image file

```
CvCapture* webcam = cvCreateCameraCapture(0);
                if (!webcam) — This means "Couldn't find the webcam."
                   /* Exit with an error */
                while (1) { Loop forever.
Read an image ____ IplImage* image = cvQueryFrame(webcam); from the webcam.
                  if (image) {
                  If you read an image, you'll need to process it here.
```

```
The name of the image file

The name of the image file

CVSaveImage ("somefile.jpg", image, 0);

The image you read

from the webcam

Unless you want a

grayscale image, set

this flag to 0.
If you decide that there's a thief in the image, you can save the
image to a file with:
```

OpenCV

Detect an intruder

Now you come to the really clever part of the code. How do you decide if there's an intruder in the frame?

One way is to check for movement in the image. OpenCV has functions to create a **Farneback optical flow**. An optical flow compares two images and tells you how much movement there's been at each pixel.

This part, you'll need to research yourself. You'll probably want to use the cvCalcOpticalFlowFarneback() to compare two consecutive images from the webcam and create the optical flow. From that, you'll need to write some code that measures the amount of movement between the two frames. If the movement's above a threshold level, you'll know that something large is moving in front of the webcam.

Make a clean getaway

When you start the program, you don't want the camera to record you walking away, so you might want to add a delay to give you time to leave the room.

Optional: show the current webcam output

During our tests here at the lab, we found it useful to check on the current images the program is seeing. To do this, we opened a window and displayed the current webcam output.

You can easily create a window in OpenCV with:

cvNamedWindow("Thief", 1);

To display the current image in the window, use this:


cvShowImage("Thief", image);

Maybe if I move reeeaaaally slooooowly, it won't spot me...



The finished product

You'll know your OpenCV project is complete when your computer is able to automatically take pictures of people trying to sneak up on it.

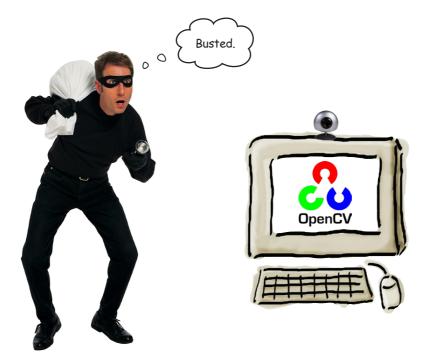

Why stop there? We're sure you have all kinds of exciting ideas for what you could do with OpenCV. Drop us a line at Head First Labs and let us know how OpenCV is working out for you.

It's time to become a C ninja...

The final part of the book covers *advanced topics*.

As you're going to be digging into some of the more advanced functions in C, you'll need to make sure that you have all of these features available on your computer. If you're using Linux or Mac, you'll be fine, but if you're using Windows, you need to have Cygwin installed.

Once you're ready, turn the page and enter the gate...



you are here ▶




9 processes and system calls





* Breaking boundaries *



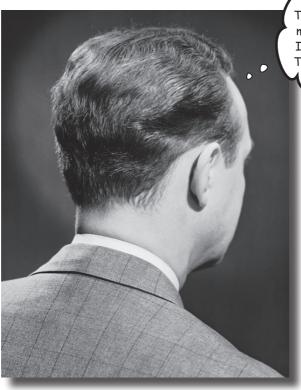

Thanks, Ted. Since you taught me how to make system calls, I haven't looked back. Ted? Ted, are you there?

It's time to think outside the box.

You've already seen that you can build complex applications by connecting small tools together on the command line. But what if you want to use other programs from inside your own code? In this chapter, you'll learn how to use system services to create and control processes. That will give your programs access to email, the Web, and any other tool you've got installed. By the end of the chapter, you'll have the power to go beyond C.

System calls are your hotline to the OS

C programs rely on the operating system for pretty much everything. They make **system calls** if they want to talk to the hardware. System calls are just functions that live *inside* the operating system's **kernel**. Most of the code in the C Standard Library depends on them. Whenever you call printf() to display something on the command line, somewhere at the back of things, a system call will be made to the operating system to send the string of text to the screen.

I want to display this on the command line, then play this music track, then send this message to the network...

Certainly. I shall perform those tasks immediately.



Let's look at an example of a system call. We'll begin with one called (appropriately) **system()**.

system() takes a single string parameter and executes it as if you had typed it on the command line:

system("dir D:"); This will print out the contents of the D: drive.

system("gedit"); This will launch an editor on Linux.

system("say 'End of line'"); This will read to you on the Mac.

The system() function is an easy way of running other programs from your code—particularly if you're creating a quick prototype and you'd sooner call external programs rather than write lots and lots of C code.



Code Magnets

This is a program that writes timestamped text to the end of a logfile. It would have been perfectly possible to write this entire program in C, but the programmer has used a call to system () as a quick way of dealing with the file handling.

See if you can complete the code that creates the operating system command string that displays the text comment, followed by the timestamp.

```
#include <stdio.h>
         #include <stdlib.h>
         #include <time.h>
         char* now() This function returns a string containing the current date and time.
           time t t;
           time (&t);
           return asctime(localtime (&t));
         }
         /* Master Control Program utility.
            Records guard patrol check-ins. */
         int main()
           char comment[80];
           char cmd[120];
           ....., , ....., );
           ......
                 _____);
           system(cmd);
           return 0;
sprintf
         "echo '%s %s' >> reports.log"
                                            stdin
                                                               printf
                                                         120
                     comment
             fgets
                                now()
  comment
                                                 stdout
                                                                   399
                                                      you are here >
```



Code Magnets Solution

This is a program that writes timestamped text to the end of a logfile. It would have been perfectly possible to write this entire program in C, but the programmer has used a call to system () as a quick way of dealing with the file handling.

You were to complete the code that creates the operating system command string that displays the text comment, followed by the timestamp.

```
#include <stdio.h>
               #include <stdlib.h>
               #include <time.h>
               char* now()
                 time t t;
                 time (&t);
                 return asctime(localtime (&t));
               /* Master Control Program utility.
                   Records guard patrol check-ins. */
              int main()
                                                                                    The data will come
                                           It needs to store
                                                                There is room
                                                                for only 80
                                           the text in the
                                                                                    from the Standard
                 char comment[80];
                                                                characters.
                                                                                    Input: the keyboard
                                           comment array.
                 char cmd[120];
 Using faets for
                      fgets
                                      comment
                                                            80
 unstructured
                                                                           stdin
                                                                      The formatted string will be
sprintf will print
                       sprintf
                                                          cmd
                                                                 stored in the cmd array.
the characters to
a string
                                                                     The command will append
                           "echo '%s %s' >> reports.log"
                                                                     the comment to a file.
    This is the command
    template.
                            comment
                                                             now()
This runs the -> system (cmd);
contents of
                 return 0;
                                                           The timestamp appears second.
                                       The comment will
the cmd string.
                                      appear first.
                                                                                               printf
                                                                                       120
                                                             scanf
                                                                         stdout
400
       Chapter 9
```



Let's compile the program and then watch it in action:

```
This will compile
the program.

This runs the

program.

Running it a

second time

This will compile

File Edit Window Help Who's Your User

> gcc guard_log.c -o guard_log

> ./guard_log

Checked in Crom - a compound interest program.


This is a Comment

> ./guard_log

Blue Leader reports breach in jet walls.

Another comment
```

Now, when you look in the same directory as the program, there's a new file that's been created called *reports.log*:

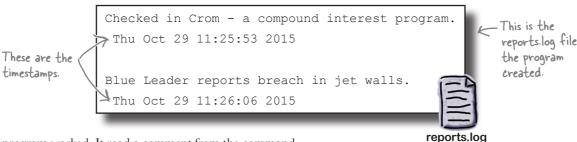

The program worked. It read a comment from the command line and called the echo command to add the comment to the end of the file.

Even though you could have written the whole program in C, by using system(), you simplified the program and got it working with very little work.

there are no **Dumb Questions**

Does the system () function get compiled into my program?

A: No. The system() function—like all system calls—doesn't live in your program. It lives in the main operating system.

So, when I make a system call, I'm making a call to some external piece of code, like a library?

A: Kind of. But the details depend on the operating system. On some operating systems, the code for a system call lives inside the kernel of the operating system. On other operating systems, it might simply be stored in some dynamic library.



Then someone busted into the system...

There's a downside to the system() function. It's quick and easy to use, but it's also kinda sloppy. Before getting into the problems with system(), let's see what it takes to break the program.

The code worked by stitching together a string containing a command, like this:




But what if someone entered a comment like this?




ALERT! ALERT! Main

system security has been breached!

By *injecting* some command-line code into the text, you can make the program run **whatever code you like**:



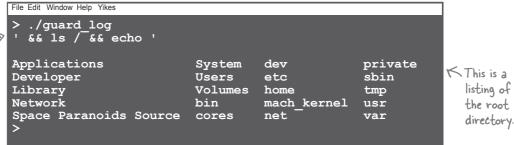

Is this a big problem? If a user can run guard_log, she can just as easily run some other program. But what if your code has been called from a *web server*? Or if it's processing data from a *file*?

Security's not the only problem

This example injects a piece of code to list the contents of the root directory, but it could have *deleted files* or *launched a virus*. But you shouldn't just worry about security.

- What if the comments contain apostrophes?
 That might break the quotes in the command.
- What if the PATH variable causes the system() function to call the wrong program?
- What if the program we're calling needs to have a specific set of environment variables set up first?

The system() function is easy to use, but most of the time, you're going to need something more structured—some way of calling a *specific* program, with a set of command-line arguments and maybe even some *environment variables*.



Geek Bits

What's the kernel?

On most machines, system calls are functions that live inside the **kernel** of the operating system. But what is the kernel? You never actually *see* the kernel on the screen, but it's always there, controlling your computer. The kernel is the most important program on your computer, and it's in charge of **three things:**

Processes

No program can run on the system without the kernel loading it into memory. The kernel creates processes and makes sure they get the resources they need. The kernel also watches for processes that become too greedy or crash.

Memory

Your machine has a limited supply of memory, so the kernel has to carefully ration the amount of memory each process can take. The kernel can increase the **virtual memory size** by quietly loading and unloading sections of memory to disk.

Hardware

The kernel uses **device drivers** to talk to the equipment that's plugged into the computer. Your program can use the keyboard and the screen and the graphics processor without knowing too much about them, because the kernel talks to them on your behalf.

System calls are the functions that your program uses to talk to the kernel.

404

The exec() functions give you more control


When you call the system() function, the operating system has to interpret the command string and decide which programs to run and how to run them. And that's where the problem is: the operating system needs to *interpret* the string, and you've already seen how easy it is to get that wrong. So, the solution is to remove the **ambiguity** and tell the operating system precisely which program you want to run. That's what the **exec()** functions are for.

exec() functions replace the current process

A process is just a program running in memory. If you type **taskmgr** on Windows or **ps** -**ef** on most other machines, you'll see the processes running on your system. The operating system tracks each process with a number called the **process identifier** (**PID**).

The exec() functions **replace the current process** by running some other program. You can say which *command-line arguments* or *environment variables* to use, and when the new program starts it will have exactly the same PID as the old one. It's like a relay race, where your program hands over its process to the new program.

A process is a program running in memory.

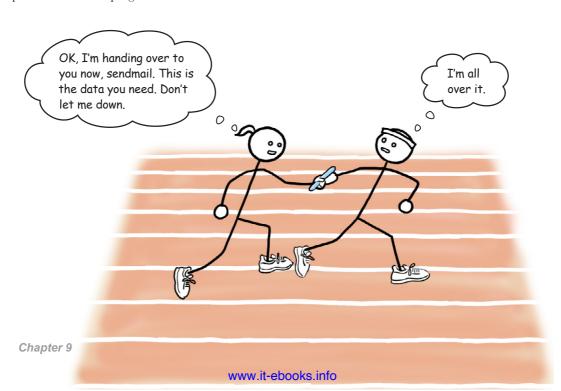

There are many exec() functions

Over time, programmers have created several different versions of exec(). Each version has a slightly different name and its own set of parameters. Even though there are lots of versions, there are really just two groups of exec() functions: the **list** functions and the **array** functions.

The exec() functions are in unistd.h.

The list functions: execl(), execlp(), execle()

The list functions accept command-line arguments as a list of parameters, like this:

The program.

This might be the full pathname of the program—execl()/ execle()—or just a command name to search for—execlp() but the first parameter tells the exec() function what program it will run.

The command-line arguments.

You need to list one by one the command-line arguments you want to use. Remember: the *first* command-line argument is always the name of the program. That means the first two parameters passed to a list version of <code>exec()</code> should always be the *same string*.

NULL.

That's right. After the last command-line argument, you need a **NULL**. This tells the function that there are no more arguments.


Environment variables (maybe).

If you call an exec() function whose name ends with ...e(), you can also pass an array of environment variables. This is just an array of strings like "POWER=4", "SPEED=17", "PORT=OPEN",



Spaces in command line arguments can confuse MinGW.

If you pass two arguments "I like" and "turtles," MinGW programs might send three arguments: "I," "like," and "turtles."

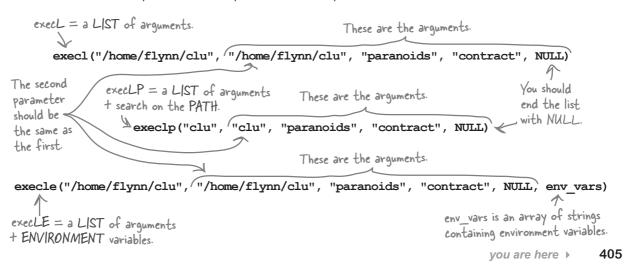

The array functions: execv(), execvp(), execve()

If you already have your command-line arguments stored in an array, you might find these two versions easier to use:

```
execV = an array or 
VECTOR of arguments.

execVP = an array/
VECTOR of arguments 

execvp ("clu", my_args);

t search on the PATH.


execvp ("clu", my_args);
```

The only difference between these two functions is that **execvp** will search for the program using the PATH variable.

How to remember the exec() functions

You can figure out which exec() function you need by constructing the name. Each exec() function can be followed by one or two characters that must be 1, v, p, or e. The characters tell you which feature you want to use. So, for the execle() function:

execle = exec + l + e = LIST of arguments + an ENVIRONMENT

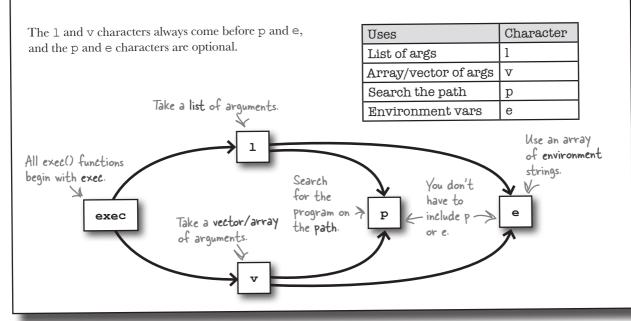

Passing environment variables

Every process has a set of *environment* variables. These are the values you see when you type set or env on the command line, and they usually tell the process useful information, such as the location of the home directory or where to find the commands. C programs can read environment variables with the **getenv()** system call. You can see getenv() being used in the diner_info program on the right.

If you want to run a program using command-line arguments *and* environment variables, you can do it like this:

```
#include <stdio.h>
#include <stdib.h>

int main(int argc, char *argv[])
{
    printf("Diners: %s\n", argv[1]);
    printf("Juice: %s\n", getenv("JUICE"));
    return 0;
    getenv() in stdlib.h lets you
    read environment variables.

diner_info.c
```

Each variable in the environment is name=value.

The last item in the array must be NULL.

Set of environment char *my_env[] = {"JUICE=peach and apple", NULL};

variables as an array of string pointers.

execle ("diner_info", "diner_info", "4", NULL, my_env);

execle passes a list of arguments and an environment.

my_env contains the environment.

The execle() function will set the command-line arguments and environment variables and then replace the current process with diner info.

```
File Edit Window Help MoreOJ

> ./my_exec_program

Diners: 4

Juice: peach and apple

>
```

But what if there's a problem?

If there's a problem calling the program, the existing process will keep running. That's useful, because it means that if you can't start that second process, you'll be able to recover from the error and give the user more information on what went wrong. And luckily, the C Standard Library provides some built-in code to help you with that.



If you're passing an environment on Cygwin, be sure to

include a PATH variable.

On Cygwin, the PATH variable is needed when programs are loaded. So, if you're passing environment variables on Cygwin, be sure to include PATH=/usr/bin.

Most system calls go wrong in the same way

Because system calls depend on something *outside* your program, they might go wrong in some way that you can't control. To deal with this problem, most system calls go wrong in the same way.

Take the execle() call, for example. It's really easy to see when an exec() call goes wrong. If an exec() call is successful, the current program stops running. So, if the program runs anything after the call to exec(), there must have been a problem:



```
If execle() worked, execle("diner_info", "diner_info", "4", NULL, my_env); this line of code puts("Dude - the diner_info code must be busted");
```

But just telling *if* a system call worked is not enough. You normally want to know *why* a system call failed. That's why most system calls follow the **golden rules of failure**.

The **errno** variable is a global variable that's defined in *errno.h*, along with a whole bunch of standard error values, like:

EPERM=1 Operation not permitted
ENOENT=2 No such file or directory
ESRCH=3 No such process
not available on all systems.

EPERM=1 Operation not permitted
No such file or directory
ESRCH=3 No such process
EMULLET=81 Bad haircut

The Golden Rules of Failure

- * Tidy up as much as you can.
- * Set the errno variable to an error value.
- * Return -1.

Now you *could* check the value of errno against each of these values, or you could look up a standard piece of error text using a function in *string.h* called **strerror()**:

puts (strerror (errno)); strerror() converts an error number into a message.

So, if the system can't find the program you are running and it sets the errno variable to ENOENT, the above code will display this message:

No such file or directory

408 Chapter 9



Different machines have different commands to tell you about their network configuration. On Linux and Mac machines, there's the /sbin/ifconfig program, and on Windows there's a command called ipconfig that's stored somewhere on the **command path**.

This program tries to run the /sbin/ifconfig program and, if that fails, it will try the ipconfig command. There's no need to pass arguments to either command. Think carefully. What type of <code>exec()</code> commands will you need?

<pre>#include <stdio.h></stdio.h></pre>	What headers will you need?		
<pre>int main() { if (</pre>	This will need to run /sbin/ifeonfig. What should we test for?	This will need to run the ipconfig command and check if it fails.	
if (execlp() {	
fprintf(stderr,	"Cannot run ipconfig: %s",);	
return 1;	↑	^	
}	What do you think goes here?		
return 0;			
}			



Different machines have different commands to tell you about their network configuration. On Linux and Mac machines, there's the /sbin/ifconfig program, and on Windows there's a command called ipconfig that's stored somewhere on the **command path**.

This program tries to run the /sbin/ifconfig program and, if that fails, it will try the ipconfig command. There's no need to pass arguments to either command. Think carefully. What type of <code>exec()</code> commands will you need?

Dumb Questions

Isn't system() just easier to use than exec()?

Yes. But because the operating system needs to interpret the string you pass to system(), it can be a bit buggy. Particularly if you create the command string dynamically.

Why are there so many exec () functions?

A: Over time, people wanted to create processes in different ways. The different versions of exec () were created for more flexibility.

Do I always have to check the return value of a system call? Doesn't it make the program really long?

A: If you make system calls and don't check for errors, your code will be shorter. But it will probably also have more bugs. It is better to think about errors when you first write code. It will make it much easier to catch bugs later on.

If I call an exec () function, can I do anything afterward?

A: No. If the exec() function is successful, it will change the process so that it runs the new program instead of your program. That means the program containing the exec() call will stop as soon as it runs the exec() function.



BULLET POINTS

- System calls are functions that live in the operating system.
- When you make a system call, you are calling code outside your program.
- system() is a system call to run a command string.
- system() is easy to use, but it can cause bugs.
- The exec() system calls let you run programs with more control.
- There are several versions of the exec() system call.
- System calls usually, but not always, return –1 if there's a problem.
- They will also set the errno variable to an error number.

mixed messages



The guys over at Starbuzz have come up with a new order-generation program that they call **coffee**:

```
#include <stdio.h>
#include <stdlib.h>

int main(int argc, char *argv[])
{
   char *w = getenv("EXTRA");
   if (!w)
    w = getenv("FOOD");
   if (!w)
    w = argv[argc - 1];
   char *c = getenv("EXTRA");
   if (!c)
    c = argv[argc - 1];
   printf("%s with %s\n", c, w);
   return 0;
}
```

To try it out, they've created this test program. Can you match up these code fragments to the output they produce?

Candidates:

```
Match each candidate with one of the possible outputs. —> Possible output:
```

```
char *my env[] = {"FOOD=coffee", NULL};
if(execle("./coffee", "./coffee", "donuts", NULL, my env) == -1) {
 fprintf(stderr,"Can't run process 0: %s\n", strerror(errno));
                                                                         coffee with donuts
 return 1;
char *my_env[] = {"FOOD=donuts", NULL};
if(execle("./coffee", "./coffee", "cream", NULL, my_env) == -1){
                                                                         cream with donuts
 fprintf(stderr, "Can't run process 0: %s\n", strerror(errno));
 return 1;
if(execl("./coffee", "coffee", NULL) == -1){
 fprintf(stderr,"Can't run process 0: %s\n", strerror(errno));
                                                                         donuts with coffee
 return 1;
char *my_env[] = {"FOOD=donuts", NULL};
if(execle("./coffee", "coffee", NULL, my_env) == -1) {
 fprintf(stderr,"Can't run process 0: %s\n", strerror(errno));
                                                                         coffee with coffee
 return 1;
```

messages unmixed



The guys over at Starbuzz have come up with a new order-generation program that they call **coffee**:

```
#include <stdio.h>
#include <stdlib.h>

int main(int argc, char *argv[])
{
   char *w = getenv("EXTRA");
   if (!w)
    w = getenv("FOOD");
   if (!w)
    w = argv[argc - 1];
   char *c = getenv("EXTRA");
   if (!c)
    c = argv[argc - 1];
   printf("%s with %s\n", c, w);
   return 0;
}
```

To try it out, they've created this test program. Can you match up these code fragments to the output they produce?

Candidates:

Possible output:

```
char *my env[] = {"FOOD=coffee", NULL};
if(execle("./coffee", "./coffee", "donuts", NULL, my env) == -1) {
 fprintf(stderr,"Can't run process 0: %s\n", strerror(errno));
                                                                          coffee with donuts
 return 1;
char *my_env[] = {"FOOD=donuts", NULL};
if(execle("./coffee", "./coffee", "cream", NULL, my_env) == -1){
                                                                          cream with donuts
 fprintf(stderr, "Can't run process 0: %s\n", strerror(errno));
 return 1;
if(execl("./coffee", "coffee", NULL) == -1){
 fprintf(stderr,"Can't run process 0: %s\n", strerror(errno));
                                                                          donuts with coffee
 return 1;
char *my_env[] = {"FOOD=donuts", NULL};
if(execle("./coffee", "coffee", NULL, my_env) == -1) {
 fprintf(stderr,"Can't run process 0: %s\n", strerror(errno));
                                                                         coffee with coffee
 return 1;
```

Read the news with RSS

RSS feeds are a common way for websites to publish their latest news stories. Each RSS feed is just an XML file containing a summary of stories and links. Of course, it's possible to write a C program that will read RSS files straight off the Web, but it involves a few programming ideas that you haven't seen yet. But that's not a problem if you can find another program that will handle the RSS processing for you.



Download RSS Gossip from https://github.com/dogriffiths/rssgossip/zipball/master. Also, if you don't have Python installed, you can get it here: http://www.python.org/.

I want all the latest stories on Pajama Death.

0

RSS Gossip is a small **Python script** that can search RSS feeds for stories containing a piece of text. To run the script, you will need Python installed. Once you have Python and *rssgossip.py*, you can search for stories like this:

This is running in a Unix environment.

You need to create an environment variable containing the address of an RSS feed.

This runs the rssgossip script with a search string.

> export RSS_FEED=http://www.cnn.com/rss/celebs.xml > python rssgossip.py 'pajama death'
Pajama Death launch own range of kitchen appliances.
Lead singer of Pajama Death has new love interest.
"I never ate the bat" says Pajama Death's Hancock.

This isn't a

real feed.
You should
replace it
with one you
find online.

Ooh, I just had a great idea. Why not write a program that can search a lot of RSS feeds all at once! Can you do that?



Chapter 9

416



The editor wants a program on his machine that can search a lot of RSS feeds all at the same time. You could do that if you ran the rssgossip.py several times for different RSS feeds. Fortunately, the **out-of-work actors** have made a start on the program for you. Trouble is, they're having problems creating the call to <code>exec()</code> the rssgossip.py script. Think carefully about what you need to do to run the script, and then complete the **newshound** code.

```
To save space, this listing doesn't
                 show the #include lines.
                                                             These are RSS feeds the editor wants
            int main(int argc, char *argv[])
                                                             (you might want to choose your own).
               char *feeds[] = {"http://www.cnn.com/rss/celebs.xml",
                                     "http://www.rollingstone.com/rock.xml",
                                     "http://eonline.com/gossip.xml"};
                                           We'll pass the search terms in as an argument.

Loop through each of the feeds.
               int times = 3;
               char *phrase = argv[1];
               for (i = 0; i < times; i++) {
                 char var[255];
This is an
                 sprintf(var, "RSS_FEED=%s", feeds[i]);
               char *vars[] = {var, NULL}; On the editor's Mac, Python is installed here if (______("/usr/bin/python", "/usr/bin/python",
environment
array.
 You need
                    fprintf(stderr, "Can't run script: %s\n", strerror(errno));
 to insert
 the
 function
                    return 1;
                                   You need to insert the other
 name
                                    parameters to the function here.
 here.
               return 0;
```

And for extra bonus points...

What will the program do when it runs?

newshound.c



The editor wants a program on his machine that can search a lot of RSS feeds all at the same time. You could do that if you ran the *rssgossip.py* several times for different RSS feeds. Fortunately, the **out-of-work actors** have made a start on the program for you. Trouble is, they're having problems creating the call to <code>exec()</code> the *rssgossip.py* script. You were to think carefully about what you need to do to run the script, and then complete the **newshound** code.

```
int main(int argc, char *argv[])
              char *feeds[] = {"http://www.cnn.com/rss/celebs.xml",
                                  "http://www.rollingstone.com/rock.xml",
                                  "http://eonline.com/gossip.xml"};
              int times = 3;
              char *phrase = argv[1];
              int i;
              for (i = 0; i < times; i++) {
                char var[255];
                sprintf(var, "RSS FEED=%s", feeds[i]);
                char *vars[] = {var, NULL};
                if ( execle ("/usr/bin/python", "/usr/bin/python",
You're using
                  "/rssgossip.py", phrase, NULL, vars ) == -1) {

fprintf(stderr, "Can't run script: %s\n", strerror(errno));
a LIST of
args and an
ENVIRON-
                  return 1;
                                              This is the
                                                                Pass the
                                 This is the
MENT, so
                                 name of the search phrase,
                                                               environment
it's execLE.
                                              as a command-
                                                               as an extra
                                 Python script.
                                                                parameter.
                                                line argument.
              return 0;
```

But what will the program do when you run it?

newshound.c



When you compile and run the program, it looks like it works:

File Edit Window Help ReadAllAboutit

> ./newshound 'pajama death'

Pajama Death ex-drummer tells all.


New Pajama Death album due next month.

The newshound program has the *rssgossip.py* script using data from the array of RSS feeds.

Worked!? Worked?!? It didn't work! What about the announcement of the surprise concert? That was on every other news site! I coulda sent my photographers down there. As it is, I was beaten to the story by everyone else in town!

Actually there is a problem.

Although the newshound program managed to run the *rssgossip.py* script, it looks like it didn't manage to run the script for *all of the feeds*. In fact, the only news it displayed came from the **first feed on the list**. That meant the other news stories matching the search terms were missed.

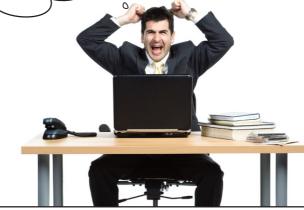



Look at the code of the <code>newshound</code> program again and think about how it works. Why do you think it failed to run the <code>rssgossip.py</code> script for any of the other <code>newsfeeds?</code>

exec() is the end of the line for your program


The exec() functions *replace* the current function by running a new program. But what happens to the original program? It terminates, and it terminates **immediately**. That's why the program only ran the *rssgossip.py* script for the first newsfeed. After it had called execle() the first time, the newshound program terminated.

The loop will run only once.

called, the whole program quits.

Once the newshound program hands over the process to the rssgossip.py program, newshound quits.

rssgossip.py

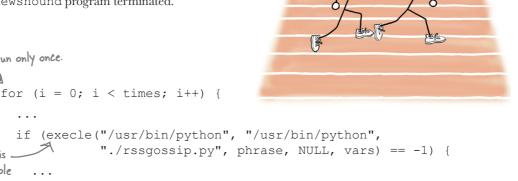

newshound -

But if you want to start *another* process and keep your original process running, how do you do it?

fork() will clone your process

You're going to get around this problem by using a system call named **fork()**.


fork () makes a complete **copy** of the current process. The brand-new copy will be running the same program, on the same line number. It will have exactly the same variables that contain exactly the same values. The only difference is that the copy process will have a different process identifier from the original.

The original process is called the **parent process**, and the newly created copy is called the **child process**.

But how can cloning the current process fix the problems with exec ()? Let's see.



To use fork() on a Windows machine, you should first install Cygwin.

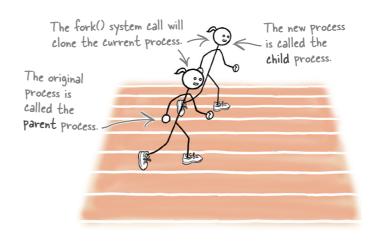

420 Chapter 9


Running a child process with fork() + exec()

The trick is to only call an exec() function on a *child process*. That way, your original parent process will be able to continue running. Let's look at the process step by step.

1. Make a copy


Begin by making a copy of your current process by calling the fork() system call.

The processes need some way of telling which of them is the parent process and which is the child, so the fork () function returns 0 to the child process, and it will return a **nonzero** value to the parent process.

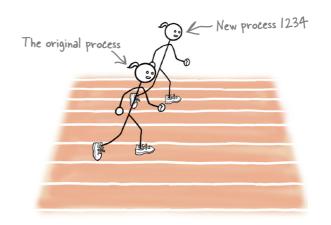

2. If you're the child process, call exec()

At this point, you have two identical processes running, both of them using identical code. But the child process (the one that received a 0 from the fork() call) now needs to replace itself by calling exec():

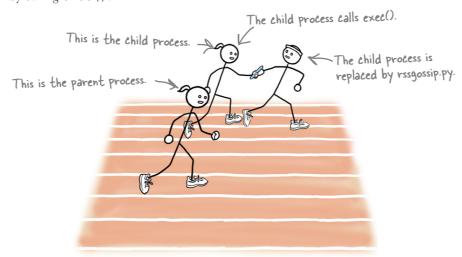

Now you have two separate processes: the child process is running the *rssgossip.py* script, and the original parent process is free to continue doing something else.

code magnets



Code Magnets

It's time to update the newshound program. The code needs to run the *rssgossip.py* script in a separate process for each of the RSS feeds. The code is reduced, so you only have to worry about the main loop. Be careful to check for errors, and don't get the parent and child processes mixed!

```
for (i = 0; i < times; i++) {
    char var[255];
    sprintf(var, "RSS_FEED=%s", feeds[i]);
space:
    char *vars[] = {var, NULL};</pre>
```

}



 $\mathtt{fork}()$ will actually return an integer value that is 0 for the child process and positive for the parent process. The parent process will receive the process identifier of the child process.

But what is <code>pid_t?</code> Different operating systems use different kinds of integers to store process IDs: some might use <code>shorts</code> and some might use <code>ints</code>. So <code>pid_t</code> is always set to the type that the operating system uses.

you are here ▶ 423




Code Magnets Solution

It's time to update the newshound program. The code needs to run the *rssgossip.py* script in a separate process for each of the RSS feeds. The code is reduced, so you only had to worry about the main loop. Be careful to check for errors, and don't get the parent and child processes mixed!

```
for (i = 0; i < times; i++) {
  char var[255];
  sprintf(var, "RSS FEED=%s", feeds[i]);
  char *vars[] = {var, NULL};
                            First, call fork() to clone the process.
    pid_t pid = fork();
                               - If fork() returned -1, there was a problem cloning the process.
      fprintf(stderr, "Can't fork process: %s\n", strerror(errno));
     return 1;
                     This is the same as if (pid == 0). 
 If fork() returned a 0, the code is running in the child process.
                           If you get here, you're the child process, so we should exec() the script.
      if (!pid) {
         if (execle("/usr/bin/python", "/usr/bin/python", "./rssgossip.py",
                                phrase, NULL, vars) == -1) {
               fprintf(stderr, "Can't run script: %s\n", strerror(errno));
               return 1;
```



Now, if you compile and run the code, this happens:

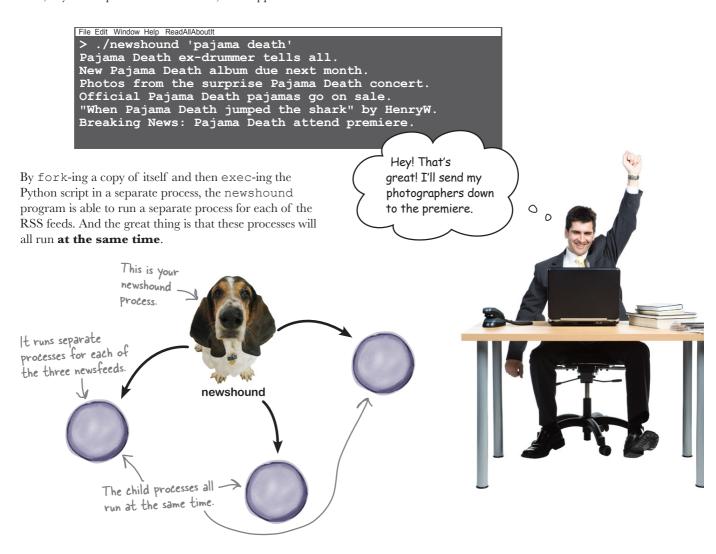

That's a lot faster than reading the newsfeeds one at a time. By learning how to create and run separate processes with fork() and exec(), not only can you make the most of your existing software, but you can also improve the performance of your code.

bumb Questions

Does system() run programs in a separate process?

A: Yes. But system() gives you less control over exactly how the program runs.

Isn't fork-ing processes really inefficient? I mean, it copies an entire process, and then a moment later we replace the child process by doing an exec ()?

A: Operating systems use lots of tricks to make fork-ing processes really quick. For example, the operating system cheats and avoids making an actual copy of the parent process's data. Instead, the child and parent processes share the same data.

But what if one of the processes changes some data in memory? Won't that screw things up?

A: It would, but the operating system will catch that a piece of memory is going to change, and then it will make a separate copy of that piece of memory for the child process.

That technique sounds quite cool. Does it have a name?

A: Yes; it's called "copy-on-write."

Q: Is a pid_t just an int?

A: It depends on the platform. The only thing you know is that it will be some integer type.

Call in an int, and it worked just fine.

A: It's best to always use pid_t to store process IDs. If you don't, you might cause problems with other system calls or if your code is compiled on another machine.

Why doesn't Windows support the fork () system call?

Windows manages processes very differently from other operating systems, and the kinds of tricks fork() needs to do in order to work efficiently are very hard to do on Windows. This may be why there isn't a version of fork() built in.

But Cygwin lets me do fork () s on Windows, right?

Yes. The gurus who work on Cygwin did a lot of work to make Windows processes look like processes that are used on Unix, Linux, and the Mac. But because they still need to rely on Windows to create the underlying processes, fork() on Cygwin can be a little slower than fork() on other platforms.

So, if I'm just interested in writing code to work on Windows, is there something else I should use instead?

A: Yes. There's a function called CreateProcess() that's like an enhanced version of system(). To find out more, go to http://msdn.microsoft.com and search for "CreateProcess."

Won't the output of the various feeds get mixed up?

A: The operating system will make sure that each string is printed completely.



BULLET POINTS

- System calls are functions that live in the kernel.
- The exec() functions give you more control than system().
- The exec() functions replace the current process.
- The fork() function duplicates the current process.
- System calls usually return –1 if they fail
- Failed system calls set the errno variable to the error number.

Your C Toolbox

You've got Chapter 9 under your belt, and now you've added processes and system calls to your toolbox. For a complete list of tooltips in the book, see Appendix ii.

system() will run a string like a console command.

fork() duplicates the current process.

fork() + exec() creates a child process.



10 interprocess communication






Creating processes is just half the story.

What if you want to *control* the process once it's running? What if you want to *send it data*? Or *read its output*? **Interprocess communication** lets processes work together to *get the job done*. We'll show you how to multiply the **power** of your code by letting it *talk* to other programs on your system.

Redirecting input and output

When you run programs from the command line, you can redirect the Standard Output to a file using the > operator:

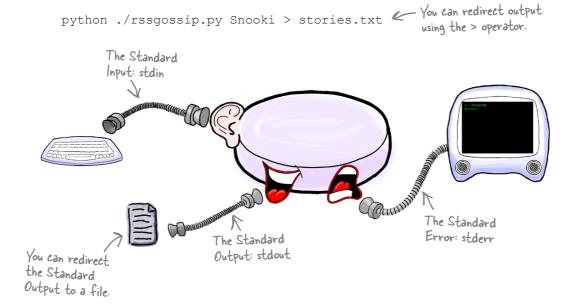


The Standard Output is one of the three default **data streams**. A *data stream* is exactly what it sounds like: a stream of data that goes into, or comes out of, a process. There are data streams for the Standard Input, Output, and Error, and there are also data streams for other things, like files or network connections. When you redirect the output of a process, you change where the data is sent. So, instead of the Standard Output sending data to the screen, you can make it send the data to a file.

Redirection is really useful on the command line, but is there a way of making a process **redirect itself**?

A look inside a typical process

Every process will contain the program it's running, as well as space for stack and heap data. But it will also need somewhere to record where data streams like the Standard Output are connected. Each data stream is represented by a **file descriptor**, which, under the surface, is just a number. The process keeps everything straight by storing the file descriptors and their data streams in a **descriptor table**.

A file descriptor is a number that represents a data stream.

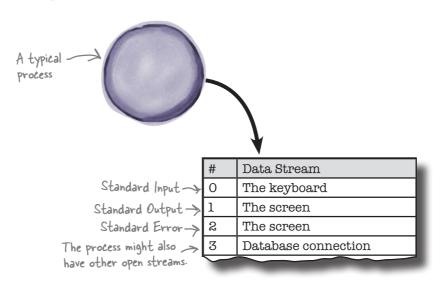


The descriptor table has one column for each of the file descriptor numbers. Even though these are called **file** descriptors, they might not be connected to an actual file on the hard disk. Against every file descriptor, the table records the associated data stream. That data stream might be a connection to the keyboard or screen, a file pointer, or a connection to the network.

The first three slots in the table are always the same. Slot 0 is the Standard Input, slot 1 is the Standard Output, and slot 2 is the Standard Error. The other slots in the table are either empty or connected to data streams that the process has opened. For example, every time your code opens a file for reading or writing, another slot is filled in the descriptor table.

When the process is created, the Standard Input is connected to the keyboard, and the Standard Output and Error are connected to the screen. And they will stay connected that way until something redirects them somewhere else. File descriptors don't necessarily refer to files.

Redirection just replaces data streams

The Standard Input, Output, and Error are always fixed in the same places in the descriptor table. But the data streams they point to can change.

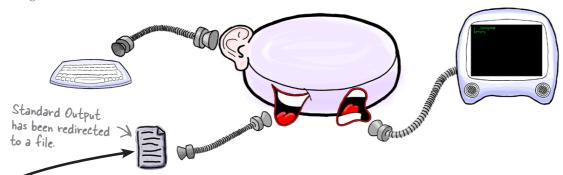

That means if you want to redirect the Standard Output, you just need to switch the data stream against descriptor 1 in the table.

#	Data Stream			
0	The keyboard The screen File stories.txt The screen			
1				
2				
3	Database connection			

All of the functions, like printf(), that send data to the Standard Output will first look in the descriptor table to see where descriptor 1 is pointing. They will then write data out to the correct data stream.

Processes can redirect themselves

Every time you've used redirection so far, it's been from the command line using the > and < operators. But processes can do their *own redirection* by **rewiring the descriptor table**.



Geek Bits

So, that's why it's 2>...

You can redirect the Standard Output and Standard Error on the command line using the > and 2> operators:

./myprog > output.txt 2> errors.log

Now you can see why the Standard Error is redirected with 2>. The 2 refers to the number of the Standard Error in the descriptor table. On most operating systems, you can use 1> as an alternative way of redirecting the Standard Output, and on Unix-based systems you can even redirect the Standard Error to the same place as the Standard Output like this:

./myprog 2>&1

2> means "redirect ? Standard Error." T # means "to the Standard Input."

fileno() tells you the descriptor

Every time you open a file, the operating system registers a new item in the descriptor table. Let's say you open a file with something like this:

The operating system will open the *guitar.mp3* file and return a pointer to it, but it will also skim through the descriptor table until it finds an empty slot and register the new file there.

But once you've got a file pointer, how do you find it in the descriptor table? The answer is by calling the **fileno()** function.

fileno() is one of the few system functions that doesn't return—l if it fails. As long as you pass fileno() the pointer to an open file, it should always return the descriptor number.

dup2() duplicates data streams

Opening a file will fill a slot in the descriptor table, but what if you want to *change* the data stream already registered against a descriptor? What if you want to change file descriptor 3 to point to a different data stream? You can do it with the **dup2()** function. dup2() duplicates a data stream from one slot to another. So, if you have a file pointer to *guitar.mp3* plugged in to file descriptor 4, the following code will connect it to file descriptor 3 as well.

dup2 (4,	3);
----------	-----

There's still just one *guitar.mp3* file, and there's still just one data stream connected to it. But the data stream (the FILE*) is now registered with file descriptors 3 and 4.

Now that you know how to find and change things in the descriptor table, you should be able to redirect the Standard Output of a process to point to a file.

	like slot 4 is free; I'll record the mus file there.	ic O
#	Data Stream	
0	The keyboard	
1	The screen	
2	The screen	
3	Database connection	
4	File guitar.mp3	1
41.		

Hmmm...looks

#	Data Stream
0	The keyboard
1	The screen
2	The screen
3	Database connection File guitar.mp3
4	File guitar.mp3

Does your error code worry you?



Do you find that you're writing duplicate error-handling code every time you make a system call? Then fear no more! Using our patented method, we'll show you how to make the most out of your error code without writing the same thing over and over.

Look at these two troublesome pieces of code:

```
pid_t pid = fork();
if (pid == -1) {
    fprintf(stderr, "Can't fork process: %s\n", strerror(errno));
    return 1;
}

Duplicated code can be the cause

of unwarranted coding stress.

if (execle(...) == -1) {
    fprintf(stderr, "Can't run script: %s\n", strerror(errno));
    return 1;
}
```

Is there some way of removing the duplicated code block? **Why, yes, there is!** By creating a simple fire-and-forget error() function, you'll make your duplicated code a thing of the past.

What's that, you say? How do you handle that troublesome return statement? After all, you can't move **that** into a function, can you?

There's no need! The exit() system call is the fastest way to stop your program in its tracks. No more worrying about returning to main(); just call exit(), and your program's history!

This is how it works. First, remove all of your error code into a separate function called error() and replace that tricky return with a call to exit(). To ensure you have the exit

```
void error (char *msg)

{

fprintf (stderr, "%s: %s\n", msg, strerror (errno));

exit(1); exit(1) will terminate your program with status | |MMEDIATELY|

}
```

Now you can replace that troublesome error-checking code with something much simpler:

```
pid_t pid = fork();
if (pid == -1) {
    error("Can't fork process");
}

if (execle(...) == -1) {
    error("Can't run script");
}
```

Warning: offer limited to one exit() call per program execution. Do not operate exit() if you have a fear of sudden program termination.



This is a program that saves the output of the *rssgossip.py* script into a file called *stories.txt*. It's similar to the newshound program, except it searches through a single RSS feed only. Using what you've learned about the descriptor table, see if you can find the missing line of code that will redirect the **Standard Output** of the child process to the *stories.txt* file.

The #includes and the error() function have been removed to save space.



```
int main(int argc, char *argv[])
 char *phrase = argv[1];
  char *vars[] = {"RSS FEED=http://www.cnn.com/rss/celebs.xml", NULL};
  FILE *f = fopen("stories.txt", "w");
  if (!f) { If we can't write to stories.txt, then f will be zero.
    error ("Can't open stories.txt"); We'll report errors using the error()
                                        function we wrote earlier.
  pid t pid = fork();
  if (pid == -1) {
   error("Can't fork process");
                             What do you think goes here?
  if (!pid) {
   if (______) {
      error("Can't redirect Standard Output");
    if (execle("/usr/bin/python", "/usr/bin/python", "./rssgossip.py",
                     phrase, NULL, vars) == -1) {
      error("Can't run script");
  return 0;
```



newshound2.c



This is a program that saves the output of the *rssgossip.py* script into a file called *stories.txt*. It's similar to the newshound program, except it searches through a single RSS feed only. Using what you've learned about the descriptor table, you were to find the missing line of code that will redirect the **Standard Output** of the child process to the *stories.txt* file.

```
int main(int argc, char *argv[])
  char *phrase = argv[1];
  char *vars[] = {"RSS FEED=http://www.cnn.com/rss/celebs.xml", NULL};
  FILE *f = fopen("stories.txt", "w"); This opens stories.txt for writing.
  if (!f) { If f was zero, we couldn't open the file.
    error("Can't open stories.txt");
  }
  pid t pid = fork();
  if (pid == -1) {
    error("Can't fork process");
  This code changes the child

if (!pid) {

This code changes the child

process because the pid is zero.

to the stories txt file.
    if (dup2(fileno(f), 1) == -1 to the stories txt f
       error("Can't redirect Standard Output");
    if (execle("/usr/bin/python", "/usr/bin/python", "./rssgossip.py",
                         phrase, NULL, vars) == -1) {
       error("Can't run script");
  return 0;
```

Did you get the right answer? The program will change the descriptor table in the child script to look like this:


That means that when the *rssgossip.py* script sends data to the Standard Output, it should appear in the *stories.txt* file.

	#	Data Stream
	0	The keyboard
	1	File stories.txt
	ಬ	The screen
_	3	File stories.txt

newshound2.c




This is what happens when the program is compiled and run:

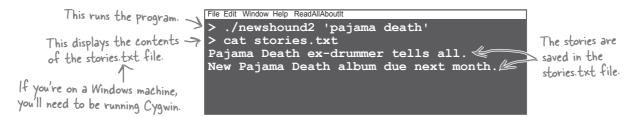

What happened?

When the program opened the *stories.txt* file with fopen (), the operating system registered the file f in the descriptor table. fileno(f) was the descriptor number it used. The dup2() function set the Standard Output descriptor(l) to point to the same file.

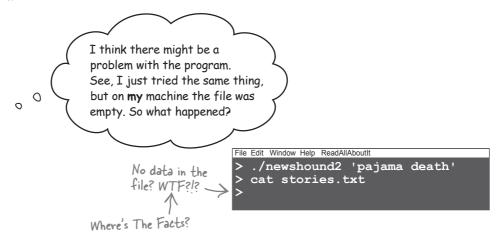




Assuming you're searching for stories that exist on the feed, why was *stories.txt* empty after the program finished?


Sometimes you need to wait...

The newshound2 program fires off a separate process to run the *rssgossip.py* script. But once that child process gets created, it's **independent** of its parent. You could run the newshound2 program and still have an empty *stories.txt*, just because the *rssgossip.py* isn't finished yet. That means the operating system has to give you some way of **waiting** for the child process to complete.

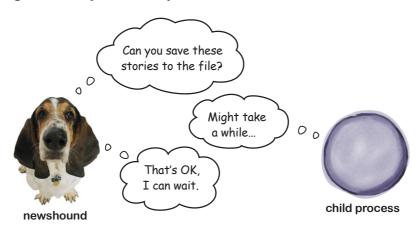

The waitpid() function

The **waitpid()** function won't return until the child process dies. That means you can add a little code to your program so that it won't exit until the *rssgossip.py* script has stopped running:

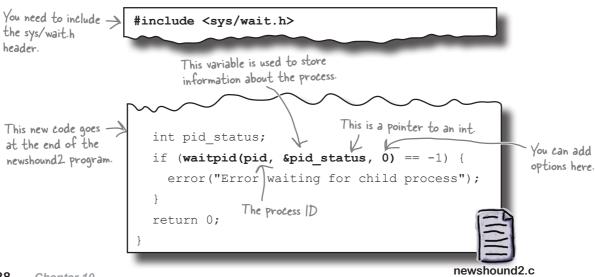





waitpid() takes three parameters:

waitpid(pid.	pid_status,	options)
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	,,,,	1		:

- - This is the process ID that the parent process was given when it forked the child.
- pid_status This will store *exit information* about the process. waitpid() will update it, so it needs to be a pointer.
- options

There are several options you can pass to waitpid(), and typing man waitpid will give you more info. If you set the options to 0, the function waits until the process finishes.

What's the status?

When the waitpid () function has finished waiting, it stores a value in pid status that tells you how the process did. To find the exit status of the child process, you'll have to pass the pid status value through a macro called WEXITSTATUS():

```
if (WEXITSTATUS (pid_status)) 			 If the exit status is not zero
  puts("Error status non-zero");
```

Why do you need the macro? Because the pid_status contains several pieces of information, and only the first 8 bits represent the exit status. The macro tells you the value of just those 8 bits.



Now, when you run the newshound2 program, it checks that the *rssgossip.py* script finishes before newshound2 itself ends:

File Edit Window Help ReadAllAboutIt

The stories.txt
file now contains
the stories
as soon as
newshound2 is run.

> ./newshound2 'pajama death'> cat stories.txtPajama Death ex-drummer tells all.New Pajama Death album due next month.

That's great. Now I'll never miss another story again.

Adding a waitpid() to the program was easy to do and it made the program more reliable. Before, you couldn't be sure that the subprocess had finished writing, and that meant there was no way you could use the newshound2 program as a proper tool. You couldn't use it in scripts and you couldn't create a GUI frontend for it.

Redirecting input and output, and making processes wait for each other, are all simple forms of **interprocess communication**. When processes are able to cooperate—by sharing data or by waiting for each other—they become much more powerful.



- exit() is a quick way of ending a program.
- All open files are recorded in the descriptor table.
- You can redirect input and output by changing the descriptor table.
- fileno() will find a descriptor in the table.
- dup2 () can be used to change the descriptor table.
- waitpid() will wait for processes to finish.



Dumb Questions

Does exit() end the program faster than just returning from main()?

A: No. But if you call <code>exit()</code>, you don't need to structure your code to get back to the <code>main()</code> function. As soon as you call <code>exit()</code>, your program is dead.

Should I check for -1 when I call exit(), in case it doesn't work?

A: No. exit() doesn't return a value, because exit() never fails. exit() is the only function that is guaranteed never to return a value and never to fail.

Q: Is the number I pass to exit() the exit status?

A: Yes.

Are the Standard Input, Output, and Error always in slots 0, 1, and 2 of the descriptor table?

A: Yes, they are.

So, if I open a new file, it is automatically added to the descriptor table?

 \mathbf{A} : Yes.

ls there a rule about which slot it gets?

A: New files are always added to the available slot with the lowest number. So, if slot number 4 is the first available one, that's the one your new file will use.

Q: How big is the descriptor table?

A: It has slots from 0 to 255.

The descriptor table seems kinda complicated. Why is it there?

A: Because it allows you to rewire the way a program works. Without the descriptor table, redirection isn't possible.

Is there a way of sending data to the screen without using the Standard Output?

On some systems. For example, on Unix-based machines, if you open /dev/tty, it will send data directly to the terminal.

Can I use waitpid() to wait for any processes I started?

A: You can use waitpid() to wait for any process.

Why isn't the pid_status in waitpid(..., &pid_status, ...) just an exit status?

A: Because the pid_status contains other information.

Q: Such as?

A: For example, WIFSIGNALED (pid_status) will be false if a process ended naturally, or true if something killed it off.

How can an integer variable like pid_status contain several pieces of information?

A: It stores different things in different bits. The first 8 bits store the exit status. The other information is stored in the other bits.

So, if I can extract the first 8 bits of the pid_status value, I don't have to use WEXITSTATUS()?

A: It is always best to use WEXITSTATUS (). It's easier to read and it will work on whatever the native int size is on the platform.

Why is WEXITSTATUS () in uppercase?


A: Because it is a macro rather than a function. The compiler replaces macro statements with small pieces of code at runtime.

Stay in touch with your child

You've seen how to run a separate process using exec() and fork(), and you know how to redirect the output of a child process into a file. But what if you want to listen to a child process directly? Is that possible? Rather than waiting for a child process to send all of its data into a file and then reading the file afterward, is there some way to start a process running and read the data it generates *in real time*?

Reading story links from rssgossip

As an example, there's an option on the *rssgossip.py* script that allows you to display the URLs for any stories that it finds:

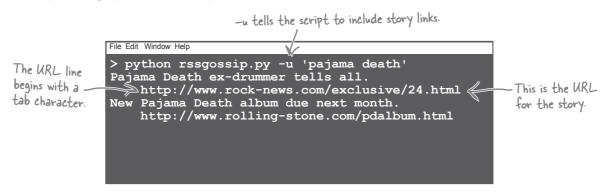

Now, you *could* run the script and save its output to a file, but that would be slow. It would be much better if the parent and child process could talk to each other while the child process is still running.



www.it-ebooks.info

Connect your processes with pipes




Pipes are used on the command line to connect the **output** of one process with the **input** of another process. In the example here, you're running the *rssgossip.py* script manually and then passing its output through a command called **grep**. The grep command finds all the lines containing **http**.

Piped commands are parents and children

Whenever you *pipe* commands together on the command line, you are actually connecting them together as parent and child processes. So, in the above example, the grep command is the **parent** of the *rssgossip.py* script.

- 1 The command line creates the parent process
- The parent process forks the rssgossip.py script in a child process.
- The parent connects the output of the child with the input of the parent using a pipe.
- 4 The parent process execs the grep command.

Pipes are used a lot on the command line to allow users to connect processes together. But what if you're just using C code? How do you connect a pipe to your child process so that you can read its output as soon as it's generated?

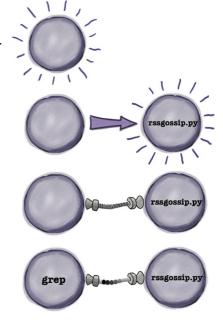

Case study: opening stories in a browser

Let's say you want to run the *rssgossip.py* script and then open the stories it finds in a web browser. Your program will run in the parent process and *rssgossip.py* will run in the child. You need to create a pipe that connects the output of *rssgossip.py* to the input of your program.

But how do you create a pipe?

pipe() opens two data streams

Because the child is going to send data to the parent, you need a pipe that's connected to the Standard Output of the child and the Standard Input of the parent. You'll create the pipe using the pipe () function. Remember how we said that every time you open a data stream to something like a file, it gets added to the descriptor table? Well, that's exactly what the pipe () functions does: it creates two connected streams and adds them to the table. Whatever is written into one stream can be read from the other.



	#	Data Stream
	0	Standard input
	1	Standard output
	2	Standard error
This is fd[O]>	3 \	Read-end of the pipe
This is fd[1].	471	Write-end of the pipe

Calling pipe() creates these two descriptors.

Whatever is written here...

(...can be read from here...

When pipe () creates the two lines in the descriptor table, it will store their file descriptors in a two-element array:

```
The descriptors will be stored in this array.

You pass the name int fd[2];

of the array to if (pipe(fd) == -1) {

the pipe() function.

error("Can't create the pipe");
```


The pipe () command creates a pipe and tells you two descriptors: fd[1] is the descriptor that **writes** to the pipe, and fd[0] is the descriptor that **reads** from the pipe. Once you've got the descriptors, you'll need to use them in the parent and child processes.

fd[1] writes to the pipe; fd[0] reads from it.

444 Chapter 10

In the child


In the child process, you need to **close** the fd[0] end of the pipe and then change the child process's Standard Output to point to the same stream as descriptor fd[1].

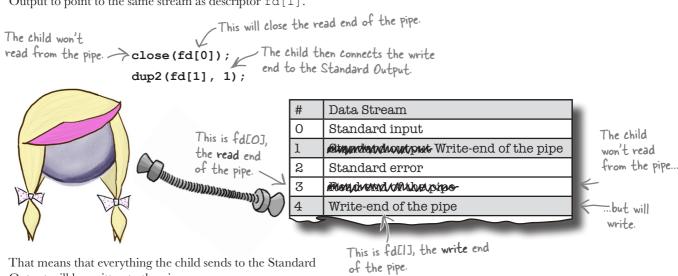


Output will be written to the pipe.

In the parent

In the parent process, you need to close the fd[1] end of the pipe (because you won't be writing to it) and then redirect the parent process's Standard Input to read its data from the same place as descriptor fd[0]:



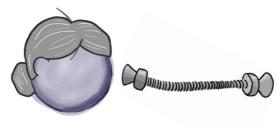

#	#	Data Stream	
()	Remains the pipe	The parent
1	L	Standard output	will read
é	રુ	Standard error	from the
5	3	Read-end of the pipe	Pipe
4	1	MATAHHAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA	but won't
			write


Everything that the child writes to the pipe will be read through the Standard Input of the parent process.

Opening a web page in a browser


Your program will need to open up a web page using the machine's browser. That's kind of hard to do, because different operating systems have different ways of talking to programs like web browsers.

Fortunately, the out-of-work actors have hacked together some code that will open web pages on most systems. It looks like they were in a rush to go do something else, so they've put together something pretty simple using system():



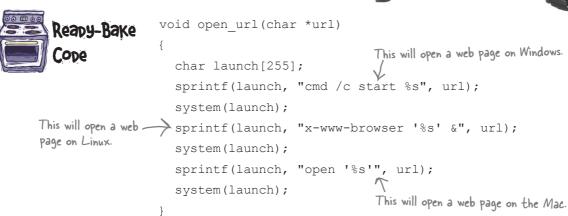

The code runs **three separate commands** to open a URL: that's one command each for the Mac, Windows, and Linux. Two of the commands will always fail, but as long as the third command works, that'll be fine.

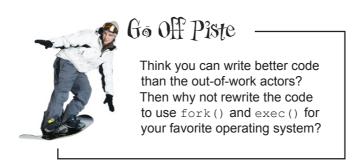



It looks like most of the program is already written. All you need to do is complete the code that connects the *parent* and *child* processes to a pipe. To save space, the #include lines and the error() and open_url() functions have been removed. Remember, in this program the *child* is going to talk to the *parent*, so make sure that pipe's connected the right way!

```
int main(int argc, char *argv[])
                                       You might want to replace this
                                       with another RSS newsfeed
  char *phrase = argv[1];
  char *vars[] = {"RSS FEED=http://www.cnn.com/rss/celebs.xml", NULL};
  int fd[2]; This array will store the descriptors for your pipe.
                                                              Pipe here.
  pid t pid = fork();
  if (pid == -1) {
    error("Can't fork process");
                    Are you parent or child? What code goes in these lines?
  if (!pid) {
    .....
    if (execle("/usr/bin/python", "/usr/bin/python", "./rssgossip.py",
                     "-u", phrase, NULL, vars) == -1) {
      error ("Can't run script"); "-u" tells the script to display
    Fare you in the parent or the child here?
                                  URLs for the stories.
    What do you need to do to the pipe?
  What needs
  char line[255];
                                                              to go here?
 while (fgets(line, 255,_____)) {
                                                              What will you
                                                              read from?
    if (line[0] == '\t') 

If the line starts with a tab...
      open_url(line + 1); ....then it's a URL.
             "line + 1" is the string starting
  return 0;
              after the tab character.
                                                                    news_opener.c
```



It looks like most of the program is already written. You were to complete the code that connects the *parent* and *child* processes to a pipe. To save space, the #include lines and the error() and open_url() functions have been removed.

```
int main(int argc, char *argv[])
  char *phrase = argv[1];
  char *vars[] = {"RSS FEED=http://www.cnn.com/rss/celebs.xml", NULL};
  int fd[2]; This will create the pipe and store its descriptors in fd[0] and fd[1].
  if (pipe(fd) == -1) {

error("Can't create the pipe"); Need to check that return code, in case we can't create the pipe.
  pid t pid = fork();
  if (pid == -1) {
     error("Can't fork process");
          You're in the child process here.
     (!pid) {
dup2(fd[], 1); This will set the Standard Output to the write end of the pipe.
close(fd[O]); The child won't read from the pipe, so we'll close the read end.
  if (!pid) {
     if (execle("/usr/bin/python", "/usr/bin/python", "./rssgossip.py",
                              "-u", phrase, NULL, vars) == -1) {
        error("Can't run script");
     You're in the parent process down here.
  dup2(fd[O], O); This will redirect the Standard Input to the read end of the pipe.
  close(fd[1]); This will close the write end of the pipe, char line[255]; because the parent won't write to it.
  while (fgets(line, 255, stdin )) {
     if (line[0] == '\t')
        open url(line + 1);
                                     You're reading from the You could also Standard Input, because have put fd[O].
                                       that's connected to the
  return 0;
                                       pipe.
```

news_opener.c



When you compile and run the code, this happens:



That's great. It worked.

The news_opener program ran the rssgossip.py in a separate process and told it to display URLs for each story it found. All of the output of the screen was redirected through a **pipe** that was connected to the news_opener parent process. That meant the news_opener process could search for any URLs and then open them in the browser.

Pipes are a great way of connecting processes together. Now, you have the ability to not only **run** processes and **control** their environments, but you also have a way of **capturing their output**. That opens up a huge amount of functionality to you. Your C code can now use and control **any program** that you can use from the command line.





—Go Off Piste

Now that you know how to control *rssgossip.py*, why not try controlling some of these programs? You can get all of them for Unix-style machines or any Windows machine using Cygwin:

curl/wget

These programs let you talk to web servers. If you call them from C code, you can write programs that can talk to the Web.

mail/mutt

These programs let you send email from the command line. If they're on your machine, it means your C programs can send mail too.

convert

This command can convert one image format to another image format. Why not create a C program that outputs SVG charts in text format, and then use the convert command to create PNG images from them?

there are no **Dumb Questions**

Q: Is a pipe a file?

A: It's up to the operating system how it creates pipes, but pipes created with the pipe () function are not normally files.

Q: So pipes *might* be files?

A: It is possible to create pipes based on files, which are normally called *named* pipes or FIFO (first-in/first-out) files.

Why would anyone want a pipe that uses a file?

Pipes based on files have names.
That means they are useful if two processes need to talk to each other and they are not parent and child processes. As long as both processes know the name of the pipe, they can talk with it.

Great! So how do I use named pipes?

A: Using the mkfifo() system call. For more information, see http://tinyurl.com/cdf6ve5.

If most pipes are not files, what are they?

A: Usually, they are just pieces of memory. Data is written at one point and read at another.

What happens if I try to read from a pipe and there's nothing in there?

A: Your program will wait until something is there.

How does the parent know when the child is finished?

A: When the child process dies, the pipe is closed and the fgets() command receives an end-of-file, which means the fgets() function returns 0, and the loop ends.

Q: Can parents speak to children?

A: Absolutely. There is no reason why you can't connect your pipes the other way around, so that the parent sends data to the child process.

Can you have a pipe that works in both directions at once? That way, my parent and child processes could have a two-way conversation.

No, you can't do that. Pipes always work in only one direction. But you can create two pipes: one from the parent to the child, and one from the child to the parent.



BULLET POINTS

- Parent and child processes can communicate using pipes.
- The pipe () function creates a pipe and two descriptors.
- The descriptors are for the read and write ends of the pipe.
- You can redirect Standard Input and Output to the pipe.
- The parent and child processes use different ends of the pipe.


The death of a process

You've seen how processes are created, how their environments are configured, and even how processes talk to each other. But what about how processes die? For example, if your program is reading data from the keyboard and the user hits Ctrl-C, the program stops running.


How does that happen? You can tell from the output that the program never got as far as running the second printf(), so the Ctrl-C didn't just stop the fgets() command. Instead, the whole program just stopped in its tracks. Did the operating system just unload the program? Did the fgets () function call exit ()? What happened?

The O/S controls your program with signals

The magic all happens in the operating system. When you call the fgets () function, the operating system reads the data from the keyboard, and when it sees the user hit Ctrl-C, sends an interrupt signal to the program.

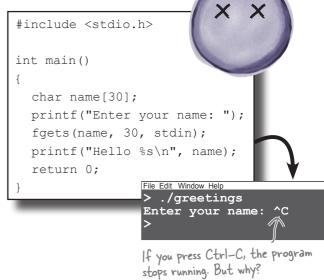


Hey! He hit Ctrl-C.

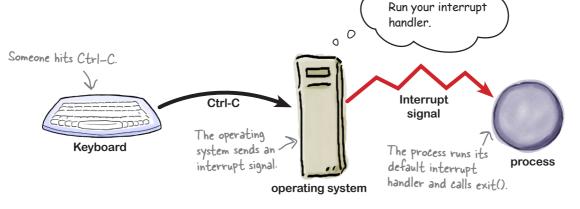

A signal is just a short message: a single integer value. When the signal arrives, the process has to stop whatever it's doing and go deal with the signal. The process looks at a table of signal mappings that link each signal with a function called the signal handler. The default signal handler for the interrupt signal just calls the exit() function.

So, why doesn't the operating system just kill the program? Because the signal table lets you run your **own code** when your process receives a signal.

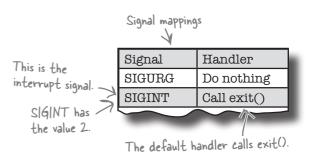

you are here ▶

Catching signals and running your own code

Sometimes you'll want to run your own code if someone interrupts your program. For example, if your process has files or network connections open, it might want to close things down and tidy up before exiting. But how do you tell the computer to run your code when it sends you a signal? You can do it with **sigaction**s.

A sigaction is a function wrapper

A sigaction is a struct that contains a pointer to a function. sigactions are used to tell the operating system which function it should call when a signal is sent to a process. So, if you have a function called diediedie() that you want the operating system to call if someone sends an *interrupt* signal to your process, you'll need to wrap the diediedie() function up as a sigaction.

This is how you create a sigaction:

```
These are some additional flags.
You can just set them to zero.

struct sigaction action;
action.sa_handler = diediedie;
sigemptyset(&action.sa_mask);
action.sa_flags = 0;
```

The function wrapped by a sigaction is called the **handler**, because it will be used to deal with (or *handle*) a signal that's sent to it. If you want to create a handler, it will need to be written in a certain way.

All handlers take signal arguments

Signals are just integer values, and if you create a custom handler function, it will need to accept an int argument, like this:

Because the handler is passed the number of the signal, you can *reuse* the same handler for several signals. Or, you can have a separate handler for each signal. How you choose to program it is up to you.

Handlers are intended to be short, fast pieces of code. They should do *just enough* to deal with the signal that's been received.

This is the name of the function you want the computer to call.

The function that the sigaction wraps is called a handler.

The mask is a way of filtering the signals that the sigaction will handle.

You'll usually want to use an empty mask, like here.



Be careful when writing to Standard Output and Error in handler functions.

Even though the example code you'll use will display text on the Standard Output, be careful about doing that in more complex programs. Signals can arrive because something bad has happened to the program. That might mean that Standard Output isn't available, so be careful.

.....;

452 Chapter 10

sigactions are registered with sigaction()

Once you've create a sigaction, you'll need to tell the operating system about it. You do that with the **sigaction()** function:

```
sigaction(signal_no, &new_action, &old action);
```

sigaction() takes three parameters:

- The signal number.
 - The integer value of the signal you want to handle. Usually, you'll pass one of the standard signal symbols, like SIGINT or SIGQUIT.
- The new action.

This is the **address** of the new sigaction you want to register.

The old action.

If you pass a pointer to another sigaction, it will be filled with details of the *current* handler that you're about to replace. If you don't care about the existing signal handler, you can set this to NULL.

The sigaction () function will return -1 if it fails and will also set the errno function. To keep the code short, some of the code you'll see in this book will skip checking for errors, but you should **always** check for errors in your own code.

This function will allow you to set a signal handler by calling catch_signal() with a signal number and a function name:

```
catch signal (SIGINT, diedieie)
```

Rewriting the code to use a signal handler

You now have all the code to make your program do something if someone hits the Ctrl-C key:

```
#include <stdio.h>
              #include <signal.h> You need to include the signal.h header
              #include <stdlib.h>
Handlers
                       This our new signal handler.
have void
             void diediedie (int sig) The operating system passes
                                             the signal to the handler.
                puts ("Goodbye cruel world....\n");
                 exit(1);
                             . This is the function to register a handler.
              int catch signal(int sig, void (*handler)(int))
                struct sigaction action;
                action.sa handler = handler;
                sigemptyset(&action.sa mask);
                action.sa flags = 0;
                return sigaction (sig, &action, NULL);
                             SIGINT means we are capturing
                                                         This sets the interrupt handler to
                             the interrupt signal.
              int main()
                                                         the handle_interrupt() function.
                if (catch signal(SIGINT, handle interrupt) == -1) {
                   fprintf(stderr, "Can't map the handler");
                   exit(2);
                char name[30];
                printf("Enter your name: ");
                 fgets(name, 30, stdin);
                printf("Hello %s\n", name);
                 return 0;
```

The program will ask for the user's name and then wait for her to type. But if instead of typing her name, the user just hits the Ctrl-C key, the operating system will automatically send the process an *interrupt signal* (SIGINT). That interrupt signal will be handled by the sigaction that was registered in the catch_signal() function. The sigaction contains a pointer to the diediedie() function. This will then be called, and the program will display a message and exit().



When you run the new version of the program and press Ctrl-C, this happens:

File Edit Window Help

> ./greetings
Enter your name: ^CGoodbye cruel world....
>


The operating system received the Ctrl-C and sent a SIGINT signal to the process, which then ran **your** handle_interrupt() function.





There are a bunch of different signals the operating system can send to your process. Match each signal to its cause.

SIGINT The process was interrupted. The terminal window changed size. SIGQUIT The process tried to access illegal memory. SIGFPE Someone just asked the kernel to kill the process. SIGTRAP The process wrote to a pipe that nothing's SIGSEGV reading. Floating-point error. SIGWINCH Someone asked the process to stop and dump SIGTERM the memory in a core dump file. SIGPIPE The debugger asks where the process is.

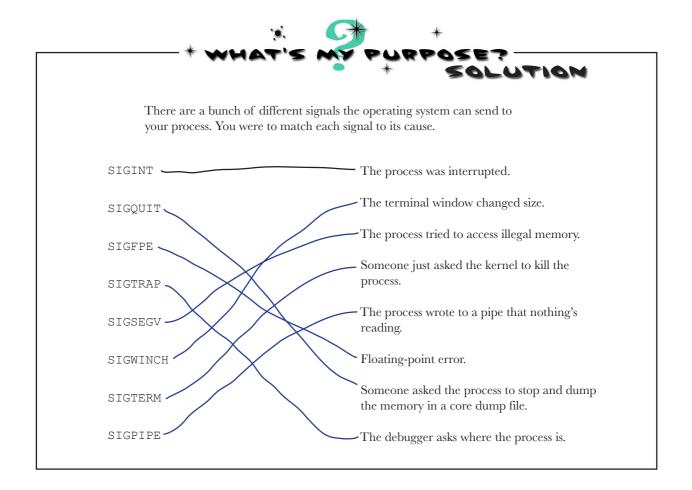

Dumb Questions

If the interrupt handler didn't call exit(), would the program still have ended?

A: No.


So, I could write a program that completely ignores interrupts?

A: You could, but it's not a good idea. In general, if your program receives an error signal, it's best to exit with an error, even if you run some of your own code first.

Use kill to send signals

If you've written some signal-handling code, how do you test it? Fortunately, on Unix-style systems, there's a command called kill. It's called kill because it's normally used to kill off processes, but in fact, kill just sends a signal to a process. By default, the command sends a SIGTERM signal to the process, but you can use it to send any signal you like.

To try it out, open *two terminals*. In one terminal, you can run your program. Then, in the second terminal, you can send signals to your program with the kill command:

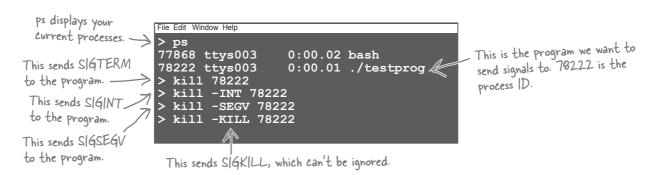

Each of these kill commands will send signals to the process and run whatever handler the process has configured. The exception is the **SIGKILL** signal. The SIGKILL signal can't be caught by code, and it can't be ignored. That means if you have a bug in your code and it is ignoring every signal, you can **always** stop the process with kill -KILL.

SIGSTOP can't be ignored either. It's used to pause your process.

Send signals with raise()

Sometimes you might want a process to send a signal to itself, which you can do with the raise() command.

raise(SIGTERM);

Normally, the raise() command is used inside your own custom signal handlers. It means your code can receive a signal for something minor and then choose to raise a more serious signal.


This is called **signal escalation**.

kill -KILL <pid>will always kill your program.

Sending your code a wake-up call

The operating system sends signals to a process when something has happened that the process needs to know about. It might be that the user has tried to interrupt the process, or someone has tried to kill it, or even that the process has tried to do something it shouldn't have, like trying to access a restricted piece of memory.


But signals are not just used when things go wrong. Sometimes a process might actually want to generate its own signals. One example of that is the **alarm signal**, **SIGALRM**. The alarm signal is usually created by the process's **interval timer**. The interval timer is like an alarm clock: you set it for some time in the future, and in the meantime your program can go and do something else:



But even though your program is busy doing other things, the timer is still running in the background. That means that when the 120 seconds are up...

...the timer fires a SIGALRM signal

When a process receives a signal, it **stops doing everything else** and handles the signal. But what does a process do with an alarm signal by default? It **stops the process**. It's really unlikely that you would ever want a timer to kill your program for you, so most of the time you will set the handler to do something else:

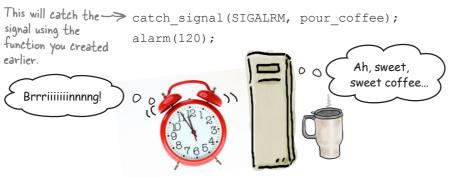

Alarm signals let you **multitask**. If you need to run a particular job every few seconds, or if you want to limit the amount of time you spend doing a job, then alarm signals are a great way of getting a program to *interrupt itself*.

458 Chapter 10

Tick, tick, tick, just a couple of minutes...

Calling alarm(120) sets the alarm for 120 seconds in the future.



Don't use alarm() and sleep() at the same time.

The sleep() function puts your program to sleep for a few seconds, but it works by using the same interval timer as the alarm() function, so if you try to use the two functions at the same time, they will interfere with each other.

Resetting and Ignoring Signals Up Close

You've seen how to set custom signal handlers, but what if you want to restore the default signal handler? Fortunately, the *signal.h* header has a special symbol **SIG_DFL**, which means *handle it the default way*.

catch signal(SIGTERM, SIG DFL);

Also, there's another symbol, **SIG_IGN**, that tells the process to completely **ignore** a signal.

catch_signal(SIGINT, SIG_IGN);

But you should be *very careful* before you choose to ignore a signal. Signals are an important way of controlling—and stopping—processes. If you ignore them, your program will be harder to stop.

OK, so if I receive TERM signal, I should just exit() like before...





Q: Can I set an alarm for less than a second?

A: Yes, but it's a little more complicated. You need to use a different function called setitimer(). It lets you set the process's interval timer directly in either seconds or fractions of a second

Q: How do I do that?

A: Go to http://tinyurl.com/3o7hzbm for more details.

Why is there only one timer for a process?

A: The timers have to be managed by the operating system kernel, and if processes had lots of timers, the kernel would go slower and slower. To prevent this from happening, the operating system limits each process to one timer.

Timers let me multitask?! Great, so I can use them to do lots of things at once?

A: No. Remember, your process will always stop whatever it's doing when it handles a signal. That means it is still only doing one thing at a time. You'll see later how you can really make your code do more than one thing at a time.

What happens if I set one timer and it had already been set?

A: Whenever you call the alarm () function, you reset the timer. That means if you set the alarm for 10 seconds, then a moment later you set it for 10 minutes, the alarm won't fire until 10 minutes are up. The original 10-second timer will be lost.

LONG Exercise

This is the source code for a program that tests the user's math skills. It asks the user to work the answer to a simple multiplication problem and keeps track of how many answers he got right. The program will keep running forever, unless:

- 1. The user presses Ctrl-C, or
- 2. The user takes more than **five seconds** to answer the question.

When the program ends, it will display the final score and set the exit status to 0.

```
#include <stdio.h>
         #include <stdlib.h>
         #include <unistd.h>
         #include <time.h>
         #include <string.h>
         #include <errno.h>
         #include <signal.h>
         int score = 0;
         void end game(int sig)
           printf("\nFinal score: %i\n", score);
What should -
happen once
           .....
the score is
displayed?
         int catch signal(int sig, void (*handler)(int))
           struct sigaction action;
           action.sa handler = handler;
           sigemptyset(&action.sa mask);
           action.sa_flags = 0;
           return sigaction (sig, &action, NULL);
         }
```

```
void times up(int sig)
                  puts("\nTIME'S UP!");
                  raise(______);
                                               Raise what?
                void error(char *msg)
                  fprintf(stderr, "%s: %s\n", msg, strerror(errno));
                }
                int main()
                  catch_signal(SIGALRM, ); the signal() catch_signal(SIGINT, ); functions do?
This makes sure
you get different srandom (time (0));
random numbers
                  while(1) {
each time.
                     int a = random() % 11; \bigcirc a and b will be random numbers from 0 to 10. int b = random() % 11; \bigcirc a and b will be random numbers from 0 to 10.
                                        Hmmm...what line is missing? Need to check the spec...
                     char txt[4];
                     printf("\nWhat is %i times %i? ", a, b);
                     fgets(txt, 4, stdin);
                     int answer = atoi(txt);
                     if (answer == a * b)
                       score++;
                     else
                       printf("\nWrong! Score: %i\n", score);
                   return 0;
                }
```



This is the source code for a program that tests the user's math skills. It asks the user to work the answer to a simple multiplication problem and keeps track of how many answers he got right. The program will keep running forever, unless:

- 1. The user presses Ctrl-C, or
- 2. The user takes more than **five seconds** to answer the question.

When the program ends, it will display the final score and set the exit status to 0.

```
#include <stdio.h>
           #include <stdlib.h>
           #include <unistd.h>
           #include <time.h>
           #include <string.h>
           #include <errno.h>
           #include <signal.h>
           int score = 0;
           void end game(int sig)
             printf("\nFinal score: %i\n", score);
You need to set = exit(0);
to O and stop.
           int catch signal(int sig, void (*handler)(int))
             struct sigaction action;
             action.sa handler = handler;
             sigemptyset(&action.sa mask);
             action.sa_flags = 0;
             return sigaction (sig, &action, NULL);
```

```
void times up(int sig)
                puts("\nTIME'S UP!");
                raise(
                                    SIGINT
                                        Raising SIGINT will make the program
                                        display the final score in end_game().
              void error(char *msg)
                fprintf(stderr, "%s: %s\n", msg, strerror(errno));
              }
              int main()
                catch_signal(SIGALRM, times_up ); functions set
                catch_signal(SIGINT, end_game ); the handlers.
This makes sure
             \Rightarrow srandom (time (0));
you get different
                while(1) {
random numbers
each time.
                  int a = random() % 11;
                  int b = random() % 11;
                  char txt[4];
   Set the alarm to \rightarrow alarm(5);
   fire in 5 seconds.
                  printf("\nWhat is %i times %i? ", a, b);
                  fgets(txt, 4, stdin);
 As long as you
                  int answer = atoi(txt);
 go through
                  if (answer == a * b)
 the loop in less
 than 5 seconds,
                   score++;
 the timer will
                  else
 be reset and it
                    printf("\nWrong! Score: %i\n", score);
 will never fire.
                return 0;
              }
```

test drive



To see if the program works, you need to run it a couple of times.

Test 1: hit Ctrl-C

The first time, you'll answer a few questions and then hit Ctrl-C.

Ctrl-C sends the process an interrupt signal (SIGINT) that makes the program display the final score and then exit().

The user hit Ctrl-C here.

The program displayed the final score before ending.

```
File Edit Window Help

> ./math_master

What is 0 times 1? 0

What is 6 times 1? 6

What is 4 times 10? 40

What is 2 times 3? 6

What is 7 times 4? 28

What is 4 times 10? ^C

Final score: 5

>
```

Test 2: wait five seconds

The second time, instead of hitting Ctrl-C, wait for at least five seconds on one of the answers and see what happens.

The alarm signal (SIGALRM) fires. The program was waiting for the user to enter an answer, but because he took so long, the timer signal was sent; the process immediately switches to the times_up() handler function. The handler displays the "TIME'S UP!" message and then escalates the signal to a SIGINT that causes the program to display the final score.

Uh, oh...looks like someone was a little slow.

```
File Edit Window Help

> ./math_master

What is 5 times 9? 45

What is 2 times 8? 16

What is 9 times 1? 9

What is 9 times 3?

TIME'S UP!

Final score: 3

>
```

Signals are a little complex, but incredibly useful. They allow your programs to end gracefully, and the interval timer can help you deal with tasks that are taking too long.

Dumb Questions

Are signals always received in the same order they are sent?

A: Not if they are sent very close together. The operating system might choose to reorder the signals if it thinks one is more important than the others.

Q: Is that always true?

A: It depends on the platform. On most versions of Cygwin, for example, the signals will always be sent and received in the same order. But in general, you shouldn't rely on it.

If I send the same signal twice, will it be received twice by the process?

Asgain, it depends. On Linux and the Mac, if the same signal is repeated very quickly, the kernel might choose to only send the signal once to the process. On Cygwin, it will always send both signals. But again, you should not assume that just because you sent the same signal twice, it will be received twice.



BULLET POINTS

- The operating system talks to processes using signals.
- Programs are normally stopped using signals.
- When a process receives a signal, it runs a handler.
- For most error signals, the default handler stops the program.
- Handlers can be replaced with the signal() function.
- You can send signals to yourself with raise().

- The interval timer sends SIGALRM signals.
- The alarm() function sets the interval timer.
- There is one timer per process.
- Don't use sleep () and alarm () at the same time.
- kill sends signals to a process.
- kill -KILL will always kill a process.

Your C Toolbox

You've got Chapter 10
under your belt, and now
you've added interprocess
communication to your toolbox. For
a complete list of tooltips in the book,
see Appendix ii.



11 sockets and networking

* There's no place * like 127.0.0.1 *



Programs on different machines need to talk to each other.

You've learned how to use I/O to communicate with files and how processes on the same machine can communicate with each other. Now you're going to *reach out to the rest of the world*, and learn how to write C programs that can talk to other programs **across the network** and **across the world**. By the end of this chapter, you'll be able to create **programs that behave as servers** and **programs that behave as clients**.

The Internet knock-knock server

C is used to write most of the low-level networking code on the Internet. Most networked applications need two separate programs: a **server** and a **client**.

You're going to build a server in C that tells jokes over the Internet. You'll be able to start the server on one machine like this:



Other than telling you it's running, the server won't display anything else on the screen. However, if you open a second console, you'll be able to connect to the server using a client program called **telnet**. Telnet takes two parameters: the *address* of the server, and the *port* the server is running on. If you are running telnet on the same machine as the server, you can use **127.0.1** for the address:



You'll be using telnet quite a lot in this chapter to test our server code.

If you try to use the built-in Windows telnet, you might have problems because of the way it communicates with the network. If you install the Cygwin version of telnet, you should be fine.

30000 is the number of the network port.

.

```
The server has responded.

You type in these responses.

File Edit Window Help Who'sThere?

> telnet 127.0.0.1 30000

Trying 127.0.0.1...

Connected to localhost.

Escape character is '^]'.

Internet Knock-Knock Protocol Server

Version 1.0

Knock! Knock!

> Who's there?

Oscar

> Oscar

> Oscar who?

Oscar silly question, you get a silly answer

Connection closed by foreign host.

>
```



You will need a **telnet** program in order to connect to the server. Most systems come with telnet already installed. You can check that you have telnet by typing:

telnet

on the command line.

If you *don't* have telnet, you can install it in one of these ways:

Cygwin:

Run the setup.exe program for Cygwin and search for telnet.

Linux:


Search for *telnet* in your package manager. On many systems, the package manager is called **Synaptic**.

Mac:


If you don't have telnet, you can install it from www.macports.org or www.finkproject.org.

468

Knock-knock server overview

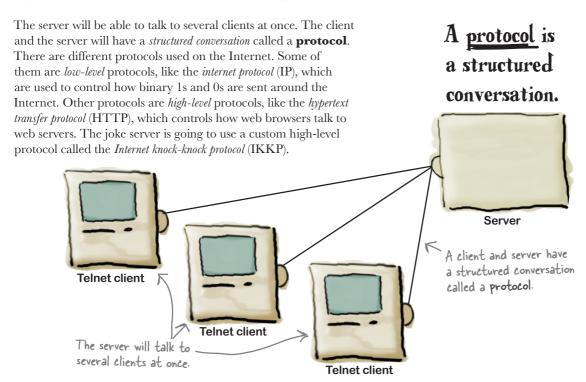

The client and the server will exchange messages like this:

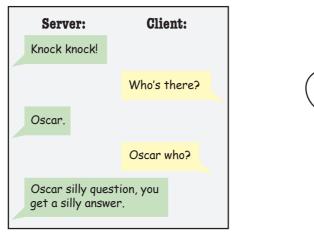

A **protocol** always has a strict set of rules. As long as the client and the server both follow those rules, everything is fine. But if one of them breaks the rules, the conversation usually stops pretty abruptly.

Protocol demands that you reply with "Who's there?" I shall therefore terminate this conversation forthwith.



469

www.it-ebooks.info

BLAB: how servers talk to the Internet

When C programs need to talk to the outside world, they use **data streams** to read and write bytes. You've used data streams that are connected to the files or Standard Input and Output. But if you're going to write a program to talk to the network, you need a new kind of data stream called a **socket**.

```
#include <sys/socket.h> \times You'll need this header.

This is a protocol number. You can leave it as O.

It's an Internet socket.

#include <sys/socket.h> \times You'll need this header.

This is a protocol number. You can leave it as O.

It's an Internet socket.
```

Before a server can use a socket to talk to a client program, it needs to go through four stages that you can remember with the acronym **BLAB**: **Bind**, **Listen**, **Accept**, **Begin**.

1. Bind to a port


470

A computer might need to run several server programs at once. It might be sending out web pages, posting email, and running a chat server all at the same time. To prevent the different conversations from getting confused, each server uses a different **port**. A port is just like a channel on a TV. Different ports are used for different network services, just like different channels are used for different content.

When a server starts up, it needs to tell the operating system which port it's going to use. This is called **binding the port**. The knock-knock server is going to use port 30000, and to bind it you'll need two things: the **socket descriptor** and a **socket name**. A socket name is just a struct that means "Internet port 30000."

This is the error() function you created in the last chapter.

Bind to a port. Listen. Accept a connection. Begin talking.

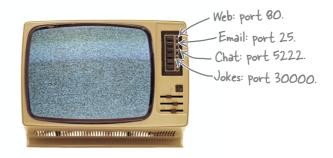

```
#include <arpa/inet.h> You'll need this header for creating Internet addresses.

These lines create a name for the port meaning "Internet port 30000." name.sin_family = PF_INET;
name.sin_port = (in_port_t) htons (30000);
name.sin_addr.s_addr = htonl(INADDR_ANY);
int c = bind (listener_d, (struct sockaddr *) &name, sizeof(name));
if (c == -1)
    error("Can't bind to socket");

Chapter 11
```

2. Listen

If your server becomes popular, you'll probably get lots of clients connecting to it at once. Would you like the clients to wait in a queue for a connection? The listen() system call tells the operating system how long you want the queue to be:

Calling listen() with a queue length of 10 means that up to 10 clients can try to connect to the server at once. They won't all be immediately answered, but they'll be able to wait. The 11th client will be told the server is too busy.

3. Accept a connection

Once you've bound a port and set up a listen queue, you then just have to...wait. Servers spend most of their lives waiting for clients to contact them. The accept () system call waits until a client contacts the server, and then it returns a **second socket descriptor** that you can use to hold a conversation on.

```
The first 10 clients will be able to wait.

The II th and 12 th will be told the server is too busy.
```

This new **connection descriptor** (connect_d) is the one that the server will use to...

Begin talking.



Why do you think the accept () system call creates the descriptor for a new socket? Why don't servers just use the socket they created to listen to the port?

A socket's not your typical data stream

So far, data streams have all been the same. Whether you're connected to files or Standard Input/Output, you've been able to use functions like fprintf() and fscanf() to talk to them. But sockets are a little different. A socket is *two way*: it can be used for input *and* output. That means it needs different functions to talk to it.

If you want to output data on a socket, you can't use fprintf(). Instead, you use a function called **send()**:

This is the message you're going to send over the network.

char *msg = "Internet Knock-Knock Protocol Server\r\nVersion 1.0\r\nKnock! Knock!\r\n> ";

Remember: it's important to always check the return value of system calls like send(). Network errors are really common, and your servers will have to cope with them.



Geek Bits

What port should I use?

You need to be careful when you choose a port number for a server application. There are lots of different servers available, and you need to make sure you don't use a port number that's normally used for some other program. On Cygwin and most Unix-style machines, you'll find a file called /etc/services that lists the ports used by most of the common servers. When you choose a port, make sure there isn't another application that already uses the same one.

Port numbers can be between 0 and 65535, and you need to decide whether you want to use a low number (< 1024) or a high one. Port numbers that are lower than 1024 are usually only available to the superuser or administrator on most systems. This is because the low port numbers are reserved for well-known services, like web servers and email servers. Operating systems restrict these ports to administrators only, to prevent ordinary users from starting unwanted services.

Most of the time, you'll probably want to use a port number greater than 1024.



The includes are removed to save space.

This server generates random advice for any client that connects to it, but it's not quite complete. You need to fill in the missing system calls. Also, this version of the code will send back a single piece of advice and then end. Part of the code needs to be inside a loop. Which part?

```
int main(int argc, char *argv[])
  char *advice[] = {
    "Take smaller bites\r\n",
    "Go for the tight jeans. No they do NOT make you look fat.\r\n",
     "One word: inappropriate\r\n",
     "Just for today, be honest. Tell your boss what you *really* think\n'",
     "You might want to rethink that haircut\r\n"
  };
  int listener_d = (PF_INET, SOCK_STREAM, 0);
  struct sockaddr in name;
  name.sin family = PF INET;
  name.sin port = (in port t)htons(30000);
  name.sin addr.s addr = htonl(INADDR ANY);
  (listener_d, (struct sockaddr *) &name, sizeof(name));
  .....(listener_d, 10);
  puts ("Waiting for connection");
  struct sockaddr storage client addr;
  unsigned int address size = sizeof(client addr);
  int connect_d = ____(listener_d, (struct sockaddr *)&client_addr, &address_size);
  char *msg = advice[rand() % 5];
  .....(connect_d, msg, strlen(msg), 0);
  close(connect d);
  return 0;
   And for a bonus point, if you add in the missing #include statements, the program will work. But what has
```

the programmer missed out? Hint: look at the system calls.

The programmer has forgotten to



This server generates random advice for any client that connects to it, but it's not quite complete. You needed to fill in the missing system calls. Also, this version of the code will send back a single piece of advice and then end. Part of the code needs to be inside a loop. Which part?

```
int main(int argc, char *argv[])
 char *advice[] = {
   "Take smaller bites\r\n",
    "Go for the tight jeans. No they do NOT make you look fat.\r\n",
    "One word: inappropriate\r\n",
    "Just for today, be honest. Tell your boss what you *really* think\n",
    "You might want to rethink that haircut\r\n"
 struct sockaddr in name;
 name.sin family = PF INET;
                                                  Bind the socket to port 30000.
 name.sin port = (in port t)htons(30000);
  name.sin addr.s addr = htonl(INADDR ANY);
  bind (listener_d, (struct sockaddr *) &name, sizeof(name));
 listen (listener_d, 10); Set to the listen queue depth to 10.
  puts ("Waiting for connection");
  struct sockaddr storage client addr;
   unsigned int address_size = sizeof(client_addr);
   int connect_d = accept (listener_d, (struct sockaddr *)&client_addr, &address_size)
   char *msg = advice[rand() % 5]; Accept a connection from a client.
   send (connect_d, msg, strlen(msg), 0);
   close (connect_d); Regin talking to the client.
  }
 return 0;
   And for a bonus point, if you add in the missing #include statements, the program will work. But what has
   the programmer missed out? Hint: look at the system calls.
   The programmer has forgotten to check for errors. You should always check if socket, bind, listen, accept, or send return -1.
```



Let's compile the advice server and see what happens.

```
File Edit Window Help I'mTheServer

> gcc advice_server.c -o advice_server

> ./advice_server

Waiting for connection
```

Then, while the server is still running, open a second console and connect to the server using telnet a couple of times.


```
File Edit Window Help I'mTelnet

> telnet 127.0.0.1 30000
Trying 127.0.0.1...
Connected to localhost.
Escape character is '^]'.
One word: inappropriate
Connection closed by foreign host.
> telnet 127.0.0.1 30000
Trying 127.0.0.1...
Connected to localhost.
Escape character is '^]'.
You might want to rethink that haircut
Connection closed by foreign host.
>
```

That's great, the server works. Here, you're using 127.0.0.1 as the IP address, because the client is running on the same machine as the server. But you could have connected to the server from anywhere on the network and we'd have gotten the same response.



Sometimes the server doesn't start properly

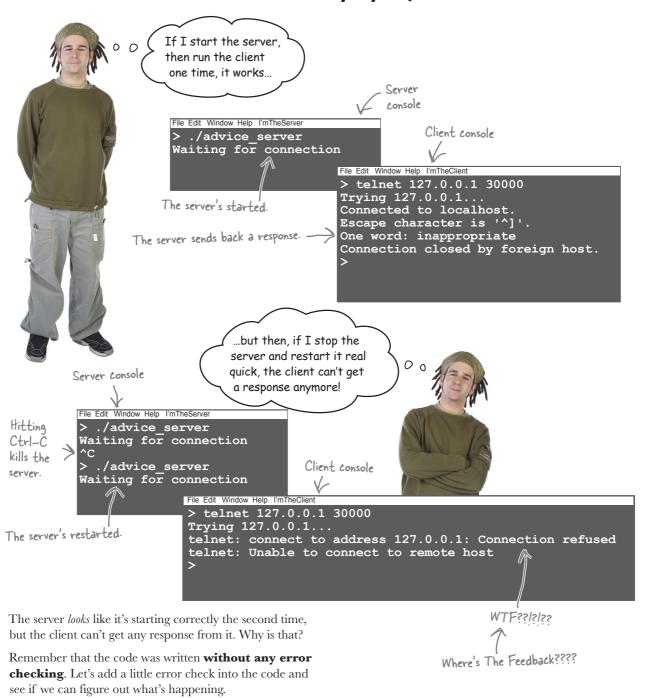

476 Chapter 11

Why your mom always told you to check for errors

Then you'll get a little more information from the server if it is stopped and restarted quickly:

```
File Edit Window Help I'mTheServer

> ./advice_server

Waiting for connection

^C

> ./advice_server

Can't bind the port: Address already in use

>
```

If the server has responded to a client and then gets stopped and restarted, the call to the bind system call fails. But because the original version of the program never checked for errors, the rest of the server code ran even though it couldn't use the server port.

Bound ports are sticky

When you bind a socket to a port, the operating system will prevent anything else from rebinding to it for the next 30 seconds or so, and that includes the program that bound the port in the first place. To get around the problem, you just need to set an option on the socket before you bind it:

ALWAYS check for errors on system calls.

```
You need an int variable to store the option.

int reuse = 1;

Setting it to | means "Yes, reuse the port."

if (setsockopt(listener_d, SOL_SOCKET, SO_REUSEADDR, (char *) & reuse, sizeof(int)) == -1)
```

```
error("Can't set the reuse option on the socket");

This makes the socket reuse the port.
```

This code makes the socket **reuse the port** when it's bound. That means you can stop and restart the server and there will be no errors when you bind the port a second time.

Reading from the client

You've learned how to send data to the client, but what about reading from the client? In the same way that sockets have a special send () function to write data, they also have a recv() function to read data.

```
<bytes read> = recv(<descriptor>, <buffer>, <bytes to read>, 0);
```

If someone types in a line of text into a client and hits return, the recv () function stores the text into a character array like this:

> - value 14, because there |W||h||o|| ' ||s| are 14 characters sent

There are a few things to remember:

- The characters are not terminated with a 10 character.
- When someone types text in telnet, the string always ends \r\n.
- The recv() will return the number of characters, or -1 if there's an error, or O if the client has closed the connection.
- You're not guaranteed to receive all the characters in a single call to recv().

This last point is important. It means you might have to call recv () more than once:

You might need to call recv() a few times to get all the characters. W||h||o

That means recv () can be tricky to use. It's best to wrap recv () in a function that stores a simple \0-terminated string in the array it's given. Something like this:

```
int read_in(int socket, char *buf, int len) — This reads all the characters until it reaches `\n'.
  char *s = buf;
                                                      Keep reading until there are no more
   int slen = len;
                                                     - characters or you reach '\n'
   int c = recv(socket, s, slen, 0);
  while ((c > 0) \&\& (s[c-1] != '\n')) {
     s += c; slen -= c;
     c = recv(socket, s, slen, 0);
     return c; In case there's an error
   if (c < 0)
  else if (c == 0) Nothing read; send
     buf[0] = '\0'; \leftarrow back an empty string.
  s[c-1]='\0'; Replace the '\r'
return len - slen; character with a '\0'.
```

-Go Off Piste

This is one way of simplifying recv(), but could you do better? Why not write your own version of read in() and let us

know at headfirstlabs.com.



Here are some other functions that are useful when you are writing a server. Do you understand how each of them works?

```
You've used this error function
                                                                a LOT in this book.
                            Display the error...
void error(char *msg)
                                                                - Don't call this function if you
                                                                 want the program to keep running.
  fprintf(stderr, "%s: %s\n", msg, strerror(errno));
  exit (1); ... then stop the program.
                                          int open listener socket()
                                          \rightarrow int s = socket(PF INET, SOCK STREAM, 0);
        Create an Internet streaming socket. -
                                            if (s == -1)
                                              error("Can't open socket");
                                            return s;
Yes, reuse the socket (so you can
restart the server without problems).
void bind to port(int socket, int port)
                                  name is Internet port 30000.
  struct sockaddr in name;
  name.sin family = PF INET;
  name.sin_port = (in_port_t)htons(30000);
 name.sin addr.s addr = htonl(INADDR ANY);
\triangleint reuse = 1;
  if (setsockopt(socket, SOL SOCKET, SO REUSEADDR, (char *)&reuse, sizeof(int)) == -1)
    error ("Can't set the reuse option on the socket");
  int c = bind (socket, (struct sockaddr *) &name, sizeof(name)); Grab port 30000.
  if (c == -1)
    error("Can't bind to socket");
```

Now that you have a set of server functions, let's try them out...

LONG Exercise

Now it's time to write the code for the **Internet knock-knock server**. You're going to write a little more code than usual, but you'll be able to use the ready-bake code from the previous page. Here's the start of the program.

```
#include <stdio.h>
#include <string.h>
#include <errno.h>
#include <stdlib.h>
#include <sys/socket.h>
#include <arpa/inet.h>
#include <unistd.h>
#include <signal.h>
```

The ready-bake functions from the previous page go here.

```
This will
store the
main listener socket for
the server.

void handle_shutdown(int sig)

{

if (listener_d)


close(listener_d);

socket before the program ends.

fprintf(stderr, "Bye!\n");

exit(0);
```

Now it's over to you to write the main function. You'll need to create a new server socket and store it in <code>listener_d</code>. The socket will be bound to port 30000, and the queue depth should be set to 10. Once that's done, you need to write code that works like this:

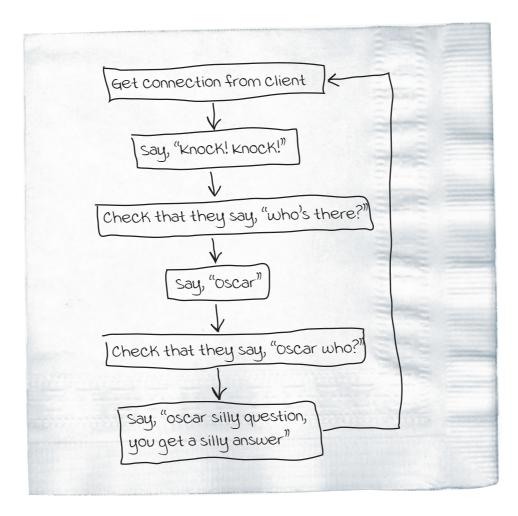

Try to check error codes and if the user says the wrong thing, just send an error message, close the connection, and then wait for another client.

Good luck!



Now it's time to write the code for the **Internet knock-knock server**. You were to write a little more code than usual, but you'll be able to use the ready-bake code from the previous page. Here's the start of the program.

```
#include <stdio.h>
#include <string.h>
#include <errno.h>
#include <stdlib.h>
#include <sys/socket.h>
#include <arpa/inet.h>
#include <unistd.h>
#include <signal.h>
```

The ready-bake functions from the previous page go here.

This is the kind of code you should have written. Is yours similar? It doesn't matter if the code is *exactly* the same. The important thing is that your code can tell the joke in the right way, and cope with errors.

```
int main(int argc, char *argv[])
 if (catch_signal(SIGINT, handle_shutdown) == -1)
   error ("Can't set the interrupt handler"); - This will call handle_shutdown() if Ctrl-C is hit.
 listener d = open listener socket();
 bind_to_port(listener_d, 30000); Create a socket on port 30000.
 if (listen(listener_d, 10) == -1) 	Set the listen-queue length to 10.
   error ("Can't listen");
 struct sockaddr _storage client _addr;
 unsigned int address size = sizeof(client_addr);
 puts ("Waiting for connection");
 char buf[255];
                                   Listen for a connection.
 while (1) {
   int connect_d = accept(listener_d, (struct sockaddr *) \( \frac{1}{5} \) client_addr, \( \frac{1}{5} \) address_size);
   if (connect d == -1)
                                                      Send data to the client.
     error ("Can't open secondary socket");
   if (say(connect_d,
          "Internet Knock–Knock Protocol Server\r\nVersion I.O\r\nKnock! Knock!\r\n> ") != -1) {
    read_in(connect_d, buf, sizeof(buf)); <
                                                 — Read data from the client.
    if (strncasecmp("Who's there?", buf, 12))
      say(connect_d, "You should say 'Who's there?'!"); Checking the user's answers.
     else {
      if (say(connect d, "Oscar\r\n>") = -1) {
        read_in(connect_d, buf, sizeof(buf));
        if (strncasecmp("Oscar who?", buf, 10))
          say(connect_d, "You should say 'Oscar who?'/\r\n");
          say(connect_d, "Oscar silly question, you get a silly answer\r\n");
    }
   close(connect_d); Close the secondary socket we used for the conversation.
 return O;
```

test drive



```
Now that you've written the knock-knock server, it's

time to compile it and fire it up.

Server console

Server console

File Edit Window Help I'mTheServer

> gcc ikkp_server.c -o ikkp_server

> ./ikkp_server

Waiting for connection
```

The server's waiting for a connection, so open a separate console and connect to it with telnet:

```
Client console
```

```
File Edit Window Help I'mTheClient

> telnet 127.0.0.1 30000
Trying 127.0.0.1...
Connected to localhost.

Escape character is '^]'.
Internet Knock-Knock Protocol Server
Version 1.0
Knock! Knock!

> Who's there?
Oscar

> Oscar who?
Oscar silly question, you get a silly answer
Connection closed by foreign host.
```

The server can tell you a joke, but what happens if you break the protocol and send back an invalid response?

```
Client console
```

```
File Edit Window Help I'mTheClient

> telnet 127.0.0.1 30000
Trying 127.0.0.1...
Connected to localhost.
Escape character is '^]'.
Internet Knock-Knock Protocol Server
Version 1.0
Knock! Knock!

> Come in
You should say 'Who's there?'!Connection closed by foreign host.
>
```

File Edit Window Help I'mTheServer

The server is able to validate the data you send it and close the connection immediately. Once you're done running the server, you can switch back to the server window and hit Ctrl-C to close it down neatly. It even sends you a farewell message:

Server console

> gcc ikkp_server.c -o ikkp_server
> ./ikkp_server
Waiting for connection
^CBye!
>


That's great! The server does everything you need it to do.

Or does it?

484 Chapter 11

The server can only talk to one person at a time

There's a problem with the current server code. Imagine someone connects to it and he is a little slow with his responses:

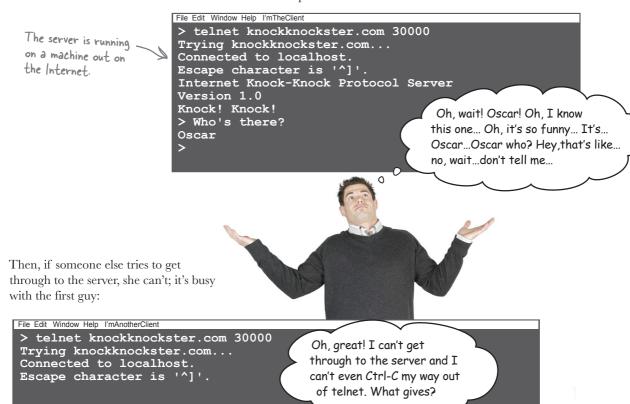

The problem is that the server is still busy talking to the first guy. The main server socket will keep the client waiting until the server calls the accept () system call again. But because of the guy already connected, it will be some time before that happens.



The server can't respond to the second user, because it is busy dealing with the first. What have you learned that might help you deal with *both* clients *at once*?


You can fork() a process for each client

When the clients connect to the server, they start to have a conversation on a separate, newly created socket. That means the main server socket is free to go and find another client. So let's do that.

When a client connects, you can fork () a separate child process to deal with the conversation between the server and the client.



While the client is talking to the child process, the server's parent process can go connect to the next client.

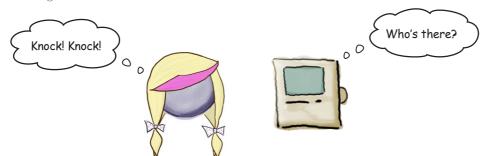

The parent and child use different sockets

One thing to bear in mind is that the parent server process will only need to use the main listener socket. That's because the main listener socket is the one that's used to accept() new connections. On the other hand, the child process will only ever need to deal with the secondary socket that gets created by the accept() call. That means once the parent has forked the child, the parent can close the secondary socket and the child can close the main listener socket.

After forking the close (connect_d);


child, the parent can close (listener_d);

close this socket.

there are no Questions

If I create a new process for each client, what happens if hundreds of clients connect? Will my machine create hundreds of processes?

A: Yes. If you think your server will get a lot of clients, you need to control how many processes you create. The child can signal you when it's finished with a client, and you can use that to maintain a count of current child processes.



This is a version of the server code that has been changed to fork a separate child process to talk to each client...except it's not quite finished. See if you can figure out the missing pieces of code.

```
while (1) {
 int connect d = accept(listener d, (struct sockaddr *)&client addr,
                      &address size);
 if (connect d == -1)
   error("Can't open secondary socket");
 if (_____) {
   close(______);
   if (say(connect d,
          "Internet Knock-Knock Protocol Server\r\nVersion 1.0\r\nKnock! Knock!\r\n> ")
       ! = -1) {
     read in (connect d, buf, sizeof(buf));
     if (strncasecmp("Who's there?", buf, 12))
       say(connect d, "You should say 'Who's there?'!");
     else {
       if (say(connect d, "Oscar\r\n> ") !=-1) {
         read in(connect d, buf, sizeof(buf));
         if (strncasecmp("Oscar who?", buf, 10))
          say(connect d, "You should say 'Oscar who?'!\r\n");
         else
          say(connect d, "Oscar silly question, you get a silly answer\r\n");
     }
   }
   close(_____);
   close(_____);
```




This is a version of the server code that has been changed to fork a separate child process to talk to each client—except it's not quite finished. You were to figure out the missing pieces of code.

```
while (1) {
  int connect d = accept(listener d, (struct sockaddr *)&client addr,
                           &address size);
  if (connect d == -1)
    error("Can't open secondary socket");
                             -This creates the child process, and you know that if
                             the fork() call returns 0, you must be in the child.
    close ( listener d ); In the child, you need to close The child will use only the connect_d
                                                                 socket to talk to the client.
                                the main listener socket.
    if (say(connect d,
             "Internet Knock-Knock Protocol Server\r\nVersion 1.0\r\nKnock! Knock!\r\n> ")
         != -1) {
      read in (connect d, buf, sizeof(buf));
      if (strncasecmp("Who's there?", buf, 12))
         say(connect d, "You should say 'Who's there?'!");
      else {
         if (say(connect d, "Oscar\r\n>") != -1) {
           read in(connect d, buf, sizeof(buf));
           if (strncasecmp("Oscar who?", buf, 10))
             say(connect d, "You should say 'Oscar who?'!\r\n");
           else
             say(connect d, "Oscar silly question, you get a silly answer\r\n");
               Once the conversation's over, the child
               can close the socket to the client.
    close( connect d );
    exit(0); Once the child process has finished talking, it should exit.
                      That will prevent it from falling into the main server loop.
  close( connect d );
```



```
Let's try the modified version of the server. You can
                                                           > gcc ikkp_server.c -o ikkp_server
compile and run it in the same way:
                                                             ./ikkp server
                                       Server console
                                                          Waiting for connection
                                                         File Edit Window Help I'mTheClient
If you open a separate console and start telnet, you
                                                         > telnet 127.0.0.1 30000
can connect, just like you did before:
                                                         Trying 127.0.0.1...
Connected to localhost.
                                     Client console -
                                                         Escape character is '^]'.
                                                         Internet Knock-Knock Protocol Server
                                                         Version 1.0
Everything seems the same, but if you leave the client
                                                         Knock! Knock!
running with the joke half-told, you should be able to
                                                         > Who's there?
see what's changed:
                                                         Oscar
```

If you open a third console, you will see that there are now two processes for the server: one for the parent and one for the child:

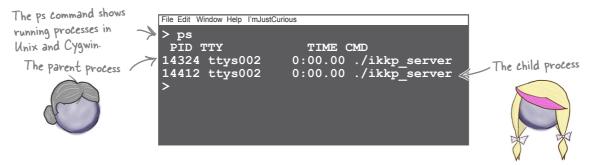

That means you can connect, even while the first client is still talking to the server:

Another client console

Now that you've built an Internet server, let's go look at what it takes to build a client, by writing something that can read from the Web.

```
File Edit Window Help I'mAnotherClient

> telnet 127.0.0.1 30000
Trying 127.0.0.1...
Connected to localhost.
Escape character is '^]'.
Internet Knock-Knock Protocol Server
Version 1.0
Knock! Knock!
>
```

Writing a web client

What if you want to write your own client program? Is it really *that* different from a server? To see the similarities and differences, you're going to write a **web client** for the hypertext transfer protocol (HTTP).

HTTP is a lot like the Internet knock-knock protocol you coded earlier. All protocols are *structured conversations*. Every time a web client and server talk, they say the same kind of things. Open telnet and see how to download http://en.wikipedia.org/wiki/O'Reilly_Media.



Most web servers run on port 80.

```
This is the numeric address of Wikipedia.
You might get a slightly different address when you try it.

You need to type sin these two lines.
```

And then you need to hit return and leave a blank line.

The server first responds with some extra details about the web page.

```
File Edit Window Help I'mJustCurious

> telnet en.wikipedia.org 80

Trying 91.198.174.225...

Connected to wikipedia-lb.esams.wikimedia.org.

Escape character is '^]'.

GET /wiki/O'Reilly Media http/1.1 — This is the path that follows
Host: en.wikipedia.org the hostname in the URL.

HTTP/1.0 200 OK

Server: Apache what hostname you are using.

...

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html lang=en" dir="ltr" class"client-nojs"
xmlns="http://www.w3.org/1999/xhtml">

<head>

<title>O'Reilly Media - Wikipedia, the free encyclopedia</title>

...

And this is the HTML for the web page.
```

When your program connects to the web server, it will need to send at least three things:

- Most web clients actually send a lot more information, but you'll just send the minimum amount.

A GET command

GET /wiki/O'Reilly Media http/1.1

- The hostname
 Host: en.wikipedia.org
- A blank line

But before you can send any data at all to the server, you need to make a connection from the client. How do you do that?

490 Chapter 11


Clients are in charge

Clients and servers communicate using sockets, but the way that each gets hold of a socket is a little different. You've already seen that **servers** use the BLAB sequence:

- Bind a port.
- 2 Listen.
- 3 Accept a conversation.
- Begin talking.

A server spends most of its life waiting for a fresh connection from a client. Until a client connects, a server really can't do anything. Clients don't have that problem. A client can connect and start talking to a server whenever it likes. This is the sequence for a *client*:

- Connect to a remote port.
- Begin talking.



Remote ports and IP addresses

When a server connects to the network, it just has to decide which port it's going to use. But clients need to know a little more: they need to know the port of the remote server, but they also need to know its **internet protocol (IP) address**:

208.201.239.100 ← Addresses with four digits are in IP version 4 format. Most will eventually be replaced with longer version b addresses.

Internet addresses are kind of hard to remember, which is why most of the time human beings use **domain names**. A domain name is just an easier-to-remember piece of text like:

www.oreilly.com


Even though human beings prefer domain names, the actual packets of information that flow across the network only use the numeric IP address.

Create a socket for an IP address

Once your client knows the address and port number of the server, it can create a **client socket**. Client sockets and server sockets are created the same way:

```
int s = socket(PF_INET, SOCK_STREAM, 0); To save space, the examples won't include the error check here. But in your code, always check for errors.
```

The difference between client and server code is what they do with sockets once they're created. A server will **bind** the socket to a *local* port, but a client will **connect** the socket to a *remote port*:

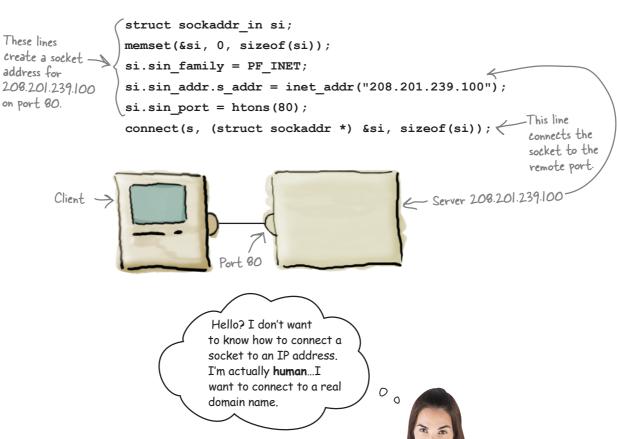

The above code works only for numeric IP addresses.

To connect a socket to a remote domain name, you'll need a function called getaddrinfo().




getaddrinfo() gets addresses for domains

The domain name system is a huge address book. It's a way of converting a domain name like www.oreilly.com into the kinds of numeric IP addresses that computers need to address the packets of information they send across the network.

Create a socket for a domain name

Most of the time, you'll want your client code to use the DNS system to create sockets. That way, your users won't have to look up the IP addresses themselves. To use DNS, you need to construct your client sockets in a slightly different way:

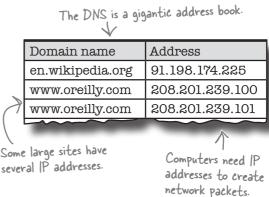

```
#include <netdb.h> 

You'll need to include this header for the getaddrinfo() function.
                struct addrinfo *res;
                struct addrinfo hints;
This creates a
                memset(&hints, 0, sizeof(hints));
                                                         getaddrinfo() expects
name resource
                hints.ai family = PF UNSPEC;
for port 80 on
                hints.ai socktype = SOCK STREAM;
www.oreilly.com", "80", &hints, &res);
```

The getaddrinfo() constructs a new data structure on the **heap** called a *naming resource*. The naming resource represents a port on a server with a given domain name. Hidden away inside the naming resource is the IP address that the computer will need. Sometimes very large domains can have several IP addresses, but the code here will simply pick one of them. You can then use the naming resource to create a socket.

Now you can create the socket using the naming resource.

```
int s = socket(res->ai family, res->ai socktype,
                      res->ai protocol);
```

Finally, you can connect to the remote socket. Because the naming resource was created on the heap, you'll need to tidy it away with a function called **freeaddrinfo()**:

res->ai_addrlen is the size of the address in memory.

res->ai_addr is the connect(s, res->ai_addr, res->ai_addrlen); This will connect to addr of the remote socket. addr of the remote freeaddrinfo(res); host and port.

When you've connected, you can delete the address data with freeaddrinfO().

Once you've connected a socket to a remote port, you can read and write to it using the same recv() and send() functions you used for the server. That means you should have enough information now to write a web client...



Code Magnets

Here is the code for a web client that will download the contents of a page from Wikipedia and display it on the screen. The web page will be passed as an argument to the program. Think carefully about the data you need to send to a web server running HTTP.

```
#include <stdio.h>
#include <string.h>
#include <errno.h>
#include <stdlib.h>
#include <sys/socket.h>
#include <arpa/inet.h>
#include <unistd.h>
#include <netdb.h>
void error(char *msg)
  fprintf(stderr, "%s: %s\n", msg, strerror(errno));
  exit(1);
}
int open socket(char *host, char *port)
{
  struct addrinfo *res;
  struct addrinfo hints;
  memset(&hints, 0, sizeof(hints));
  hints.ai_family = PF UNSPEC;
  hints.ai socktype = SOCK STREAM;
  if (getaddrinfo(host, port, &hints, &res) == -1)
    error("Can't resolve the address");
  int d sock = socket(res->ai family, res->ai socktype,
                       res->ai protocol);
  if (d sock == -1)
    error("Can't open socket");
  int c = connect(d sock, res->ai addr, res->ai addrlen);
  freeaddrinfo(res);
  if (c == -1)
    error("Can't connect to socket");
  return d sock;
}
```

```
int result = send(socket, s, strlen(s), 0);
      if (result == -1)
        fprintf(stderr, "%s: %s\n", "Error talking to the server",
     strerror(errno));
      return result;
     }
     int main(int argc, char *argv[])
      int d sock;
      d_sock = ....;
       char buf[255];
       sprintf(buf, _____, argv[1]);
       say(d sock, buf);
       say(d_sock, _____);
       char rec[256];
       int bytesRcvd = recv(d sock, rec, 255, 0);
      while (bytesRcvd) {
        if (bytesRcvd == -1)
          error("Can't read from server");
        rec[bytesRcvd] = _____;
        printf("%s", rec);
        bytesRcvd = recv(d sock, rec, 255, 0);
       ·....;
      return 0;
     }
                  "Host: en.wikipedia.org\r\n\r\n"
 '\0'
                                               "GET /wiki/%s http/1.1\r\n"
         "\r\n"
                                                         close(d_sock)
open_socket("en.wikipedia.org", "80")
                                "Host: en.wikipedia.org\r\n"
                                                                 495
                                                     you are here >
```

int say(int socket, char *s)



Code Magnets Solution

Here is the code for a web client that will download the contents of a page from Wikipedia and display it on the screen. The web page will be passed as an argument to the program. You were to think carefully about the data you need to send to a web server running HTTP.

```
#include <stdio.h>
#include <string.h>
#include <errno.h>
#include <stdlib.h>
#include <sys/socket.h>
#include <arpa/inet.h>
#include <unistd.h>
#include <netdb.h>
void error(char *msg)
  fprintf(stderr, "%s: %s\n", msg, strerror(errno));
  exit(1);
}
int open socket(char *host, char *port)
{
  struct addrinfo *res;
  struct addrinfo hints;
  memset(&hints, 0, sizeof(hints));
  hints.ai_family = PF UNSPEC;
  hints.ai socktype = SOCK STREAM;
  if (getaddrinfo(host, port, &hints, &res) == -1)
    error("Can't resolve the address");
  int d sock = socket(res->ai family, res->ai socktype,
                       res->ai protocol);
  if (d sock == -1)
    error("Can't open socket");
  int c = connect(d sock, res->ai addr, res->ai addrlen);
  freeaddrinfo(res);
  if (c == -1)
    error("Can't connect to socket");
  return d sock;
}
```

```
int say(int socket, char *s)
  int result = send(socket, s, strlen(s), 0);
  if (result == -1)
    fprintf(stderr, "%s: %s\n", "Error talking to the server",
strerror(errno));
  return result;
}
int main(int argc, char *argv[])
  int d sock;
              open_socket("en.wikipedia.org",
  d sock =
                                                          Create a string for the path
  char buf[255];
                                                          to the page you want.
                       "GET /wiki/%s http/1.1\r\n"
  sprintf(buf, ......
                                                      ....., argv[1]);
  say(d sock, buf);
                                                            — This sends the
                     "Host: en.wikipedia.org\r\n\r\n"
                                                             host data as well
  say(d_sock, .....
                                                        ....); as a blank line.
  char rec[256];
  int bytesRcvd = recv(d sock, rec, 255, 0);
  while (bytesRcvd) {
    if (bytesRcvd == -1)
      error("Can't read from server");
                                            - Add a '\O' to the end of the array of
                                            characters to make it a proper string.
                                  '\0'
    rec[bytesRcvd] = _____
    printf("%s", rec);
    bytesRcvd = recv(d sock, rec, 255, 0);
              close(d_sock)
  return 0;
}
                                   "Host: en.wikipedia.org\r\n"
```

test drive



If you compile and run the web client, you make it download a page from Wikipedia like this:

You'll have to replace any spaces with underscore (_) characters.

```
File Edit Window Help I'mTheWebClient

> gcc wiki client.c -o wiki client

> ./wiki client "O'Reilly_Media"

HTTP/1.0 200 OK

Date: Fri, 06 Jan 2012 20:30:15 GMT

Server: Apache
...

Connection: close

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"

"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html lang="en" dir="ltr" class="client-nojs" xmlns="http://www.w3.org/1999/xhtml">

<head>

<title>O'Reilly Media - Wikipedia, the free encyclopedia</title>

<meta http-equiv="Content-Type" content="text/html; charset=UTF-8" />

Then you get the contents of the web page from Wikipedia.
```

It works!

The client took the name of the page from the command line and then connected to Wikipedia to download the page. Because it's constructing the *path* to the file, you need to make sure that the you replace any spaces in the page name with underscore (_) characters.



-Go Off Piste

Why not update the code to automatically replace characters like spaces for you? For more details on how to replace characters for web addresses, see:

http://www.w3schools.com/tags/ref_urlencode.asp

there are no **Dumb Questions**

Should I create sockets with IP addresses or domain names?

A: Most of the time, you'll want to use domain names. They're easier to remember, and occasionally some servers will change their numeric addresses but keep the same domain names.

Q: So, do I even need to know how to connect to a numeric address?

A: Yes. If the server you are connecting to is not registered in the domain name system, such as machines on your home network, then you will need to know how to connect by IP.

Q: Can I use getaddrinfo() with a numeric address?

A: Yes, you can. But if you *know* that the address you are using is a numeric IP, the first version of the client socket code is simpler.



BULLET POINTS

- A protocol is a structured conversation.
- Servers connect to local ports.
- Clients connect to remote ports.
- Clients and servers both use sockets to communicate.
- You write data to a socket with send ().
- You read data from a socket with recv ().
- HTTP is the protocol used on the Web.

Your C Toolbox

You've got Chapter 11 under your belt, and now you've added sockets and networking to your toolbox. For a complete list of tooltips in the book, see Appendix ii.

Telnet is a simple network client

Create sockets with the socket() function.

Servers BLAB:

B = bind()

L = listen()

A = accept()

B = Begin talking

Use fork() to cope with several clients at once.

DNS = Domain name system

getaddrinfo()
finds
addresses by
domain.

12 threads




Johnny told me he got his heap variables locked in a mutex.

Programs often need to do several things at the same time.

POSIX threads can make your code more responsive by **spinning off several pieces of code to run in parallel**. But be careful! Threads are powerful tools, but you don't want them crashing into each other. In this chapter, you'll learn how to put up **traffic signs** and **lane markers** that will *prevent a code pileup*. By the end, you will know how to **create POSIX threads** and how to use **synchronization mechanisms** to *protect the integrity of sensitive data*.

Tasks are sequential...or not...

Imagine you are writing something complex like a game in C. The code will need to perform several different tasks:

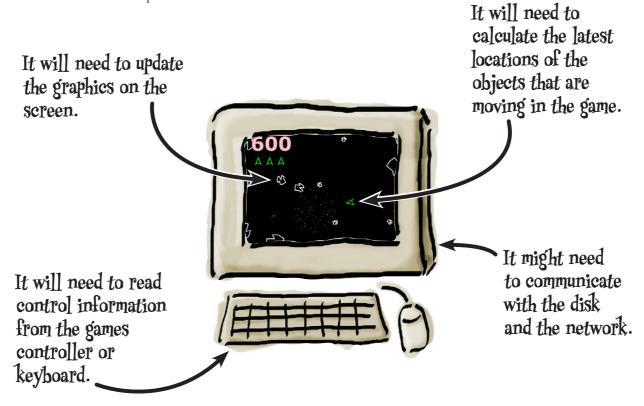

Not only will your code need to do all of these things, but it will need to do them *all at the same time*. That's going to be true for many different programs. Chat programs will need to read text from the network and send data to the network at the same time. Media players will need to stream video to the display as well as watch for input from the user controls.

How can your code perform several different tasks at once?

...and processes are not always the answer

You've already learned how to make the computer do several things at once: with **processes**. In the last chapter, you built a network server that could deal with several different clients at once. Each time a new user connected, the server created a new process to handle the new session.

Does that mean that whenever you want to do several things at once, you should just create a separate process? Well, not really, and here's why.

Processes take time to create

Some machines take a little while to create new processes. Not much time, but some. If the extra task you want to perform takes just a few hundredths of a second, creating a process each time won't be very efficient.

Processes can't share data easily

When you create a child process, it automatically has a complete copy of all the data from the parent process. But it's a copy of the data. If the child needs to send data back to the parent, then you need something like a pipe to do that for you.

Processes are just plain difficult

You need to create a chunk of code to generate processes, and that can make your programs long and messy.

You need something that starts a separate task quickly, can share all of your current data, and won't need a huge amount of code to build.

You need threads.

Simple processes do one thing at a time

Say you have a task list with a set of things that you need to do:

Shop-n-Surf Run the cash register. Stock the shop.

Rewax the surfboards.

Answer the phones.

keep the books.

SHOP-N-SURF




Alternatively, just go surfing

You can't do all of the tasks at the same time, not by yourself. If someone comes into the shop, you'll need to stop stocking the shelves. If it looks like rain, you might stop bookkeeping and get on the roof. If you work in a shop alone, you're like a simple process: you do one thing after another, but always one thing at a time. Sure, you can switch between tasks to keep everything going, but what if there's a **blocking operation**? What if you're serving someone at the checkout and the phone rings?


All of the programs you've written so far have had a **single** thread of execution. It's like there's only been one person working inside the program's process.

Well, I can't do everything all at once. Who do you think I am?



Employ extra staff: use threads

A multithreaded program is like a shop with several people working in it. If one person is running the checkout, another is filling the shelves, and someone else is waxing the surfboards, then everybody can work without interruptions. If one person answers the phone, it won't stop the other people in the shop.

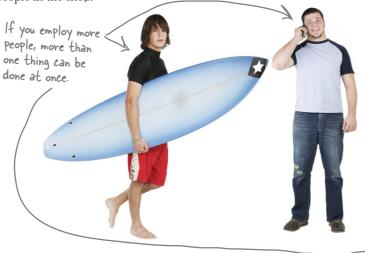



In the same way that several people can work in the same shop, you can have several threads living inside the same process. All of the threads will have access to the same piece of heap memory. They will all be able to read and write to the same files and talk on the same network sockets. If one thread changes a global variable, all of the other threads will see the change immediately.

That means you can give each thread a separate task and they'll all be performed at the same time.



- If one thread has to wait for something, the other threads can keep running.

All of the threads can run inside a single process.


you are here ▶

505

How do you create threads?


There are a few thread libraries, and you're going to use one of the most popular: the **POSIX thread library**, or **pthread**. You can use the pthread library on Cygwin, Linux, and the Mac.

Let's say you want to run these two functions in separate threads:

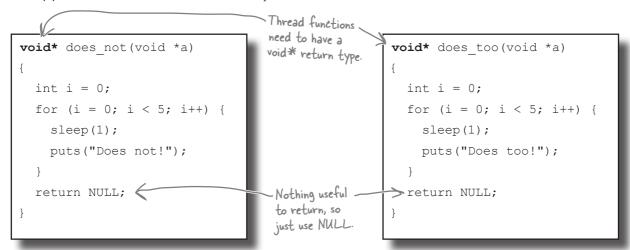

Did you notice that both functions return a *void pointer*? Remember, a void pointer can be used to point to any piece of data in memory, and you'll need to make sure that your thread functions have a **void*** return type.

You're going to run each of these functions inside its own thread.

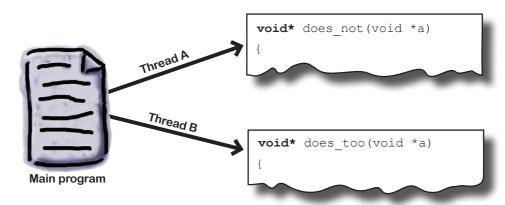

You'll need to run both of these functions in parallel in separate threads. Let's see how to do that.

Create threads with pthread_create

To run these functions, you'll need a little setup code, like some headers and maybe an error () function that you can call if there's a problem.

```
#include <stdio.h>
#include <stdib.h>
#include <string.h>
#include <unistd.h>
#include <errno.h>
#include <errno.h>
#include <pthread.h>
This is the header for the pthread library.

void error(char *msg)
{
    fprintf(stderr, "%s: %s\n", msg, strerror(errno));
    exit(1);
}
```

But then you can start the code for your main function. You're going to create two threads, and each one needs to have its info stored in a **pthread_t** data structure. Then you can create and run a thread with

```
This records all the information about the thread.

This pthread_t t0; does_not is the name of the function the thread will run.

pthread_t t1;

creates if (pthread_create(&t0, NULL, does_not, NULL) == -1) Always check the error("Can't create thread t0");

if (pthread_create(&t1, NULL, does_too, NULL) == -1)

error("Can't create thread t1");
```

That code will run your two functions in separate threads. But you've not quite finished yet. If your program just ran this and then finished, the threads would be killed when the program ended. So you need to wait for your threads to finish:

ftl is the address of the data structure that will store the thread info.

```
The void pointer returned from each function will be stored here.

if (pthread_join(t0, &result) == -1)
  error("Can't join thread t0");

if (pthread_join(t1, &result) == -1)
  error("Can't join thread t1");
```

The pthread_join() also receives the return value of your thread function and stores it in a void pointer variable. Once both threads have finished, your program can exit smoothly.

Let's see if it works.

you are here ▶ 507

test drive



Because you're using the pthread library, you'll need to make sure you link it when you compile your program, like this:


This will link the pthread library.

File Edit Window Help Don'tLoseTheThread

> gcc argument.c -lpthread -o argument

This is your program.

When you run the code, you'll see both functions running at the same time:

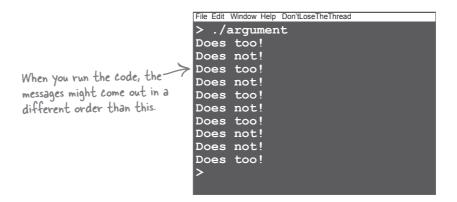

there are no Dumb Questions

If both functions are running at the same time, why don't the letters in the messages get mixed up? Each message is on its own line.

A: That's because of the way the Standard Output works. The text from puts () will all get output at once.

I removed the sleep () function, and the output showed all the output from one function and then all the output from the other function. Why is that?

A: Most machines will run the code so quickly that without the sleep() call, the first function will finish before the second thread starts running.



Beer Magnets

It's time for a really BIG party. This code runs 20 threads that count the number of beers down from 2,000,000. See if you can spot the missing code, and if you get the answer right, celebrate by cracking open a couple of cold ones yourself.

```
int beers = 2000000; Begin with 2 million beers.
 void* drink lots(void *a)
              Each thread will run this function.
    int i;
    for (i = 0; i < 100000; i++) {
      beers = beers - 1; The function will reduce the
                              beers variable by 100,000.
    return NULL;
 }
 int main()
   pthread t threads[20];
    int t;
    printf("%i bottles of beer on the wall\n%i bottles of beer\n", beers, beers);
    for (t = 0; t < 20; t++) { You'll create 20 threads that run the function.
                                                                 To save space, this example skips
                                                                 testing for errors, but don't you do
                                                                 that!
     ( , NULL, that; , NULL); €
    void* result;
    for (t = 0; t < 20; t++) {
     .....(threads[t], &result); This code waits for all the extra threads to finish.
    printf("There are now %i bottles of beer on the wall\n", beers);
    return 0;
 }
pthread_join
                                                               threads[t]
                                  threads
                                                                              drink lots
                                                &threads[t]
                pthread_create
                                                                       you are here ▶
                                                                                       509
```




Beer Magnets Solution

It's time for a really BIG party. This code runs 20 threads that count the number of beers down from 2,000,000. You were to spot the missing code.

```
int beers = 2000000;
void* drink lots(void *a)
  int i;
  for (i = 0; i < 100000; i++) {
    beers = beers - 1;
  return NULL;
int main()
 pthread_t threads[20];
  printf("%i bottles of beer on the wall\n%i bottles of beer\n", beers, beers);
  for (t = 0; t < 20; t++) {
                                                               To save space, we've skipped testing
                                                               for errors—but don't you do that!
      pthread create
                             &threads[t]
                                                        drink lots
                                           , NULL,
  void* result;
  for (t = 0; t < 20; t++) {
                        (threads[t], &result);
  printf("There are now %i bottles of beer on the wall\n", beers);
  return 0;
                                                            threads[t]
                                threads
```



Let's take a closer look at that last program. If you compile and run the code a few times, this happens:

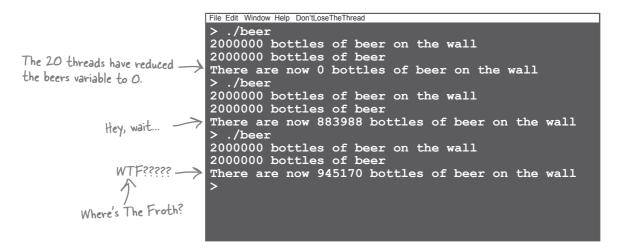

The code usually doesn't reduce the beers variable to zero.

That's really odd. The beers variable begins with a value of 2 million. Then 20 threads each try to reduce the value by 100,000. Shouldn't that mean that the beers variable *always* goes to zero?



Look carefully at the code again, and try to imagine what will happen if several threads are running it at the same time. Why is the result unpredictable? Why doesn't the beers variable get set to zero when all the threads have run? Write your answer below.

The code is not thread-safe

The great thing about threads is that lots of different tasks can run at the same time and have access to the same data. The downside is that all those different threads have access to the same data...

Unlike the first program, the threads in the second program are all reading and changing a shared piece of memory: the beers variable. To understand what's going on, let's see what happens if two threads try to reduce the value of beers using this line of code:

beers = beers - 1; Imagine two threads are running this line of code at the same time.

First of all, both threads will need to read the current value of the beers variable.



2 Then, each thread will subtract 1 from the number.



Finally, each thread stores the value for beers-1 back into the beers variable.



Even though both of the threads were trying to reduce the value of beers by 1, they didn't succeed. Instead of reducing the value by 2, they only decreased it by 1. That's why the beers variable didn't get reduced to zero—the threads kept getting in the way of each other.

And why was the result so unpredictable? Because the threads didn't always run the line of code at exactly the same time. Sometimes the threads didn't crash into each other, and sometimes they did.





Be careful to look out for code that isn't thread-safe.

How will you know?
Usually, if two threads
read and write to the same variable,
it's not.

512 Chapter 12


You need to add traffic signals

Multithreaded programs can be powerful, but they can also behave in unpredictable ways, unless you put some controls in place.

Imagine two cars want to pass down the same narrow stretch of road. To prevent an accident, you can add traffic signals. Those traffic signals prevent the cars from getting access to a shared resource (the road) at the same time.

It's the same thing when you want two or more threads to access a shared data resource: you need to add traffic signals so that no two threads can read the data and write it back at the same time.



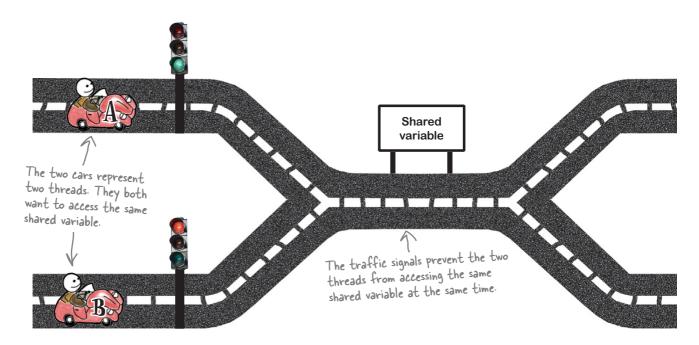

The traffic signals that prevent threads from crashing into each other are called **mutexes**, and they are one of the simplest ways of making your code thread-safe.

Mutexes are sometimes just called locks.

MUT-EX = MUTually EXclusive.

Use a mutex as a traffic signal

To protect a section of code, you will need to create a mutex lock like this:

pthread_mutex_t a_lock = PTHREAD_MUTEX_INITIALIZER;

The mutex needs to be visible to all of the threads that might crash into each other, so that means you'll probably want to create it as a **global variable**.

PTHREAD_MUTEX_INITIALIZER is actually a macro. When the compiler sees that, it will insert all of the code your program needs to create the mutex lock properly.



Red means stop.

At the beginning of your sensitive code section, you need to place your first traffic signal. The pthread_mutex_lock() will let only **one thread** get past. All the other threads will have to wait when they get to it.







pthread_mutex_lock(&a_lock); Only one thread at a time will get past this.

/* Sensitive code starts here... */



Green means go.

When the thread gets to the end of the sensitive code, it makes a call to pthread_mutex_unlock(). That sets the traffic signal back to green, and another thread is allowed onto the sensitive code:



/* ...End of sensitive code */
pthread_mutex_unlock(&a_lock);

Now that you know how to create locks in your code, you have a lot of control over exactly how your threads will work.

514 Chapter 12

www.it-ebooks.info

Passing Long Values to Thread Functions Up Close



Thread functions can accept a single void pointer parameter and return a single void pointer value. Quite often, you will want to pass and return integer values to a thread, and one trick is to use **long** values. longs can be stored in void pointers because they are the same size.

```
void* do_stuff(void* param) A thread function can accept a single
                                     void pointer parameter.
  long thread no = (long) param; Convert it back to a long.
  printf("Thread number %ld\n", thread no);
  return (void*) (thread_no + 1); Cast it back to a void pointer
                                          when it's returned.
int main()
  pthread_t threads[20];
                                                      Convert the long t value
  long t;
                                                      to a void pointer.
  for (t = 0; t < 3; t++) {
    pthread create(&threads[t], NULL, do stuff, (void*)t);
  void* result;
                                                 Convert the return value to a
  for (t = 0; t < 3; t++) {
                                                 long before using it.
    pthread join(threads[t], &result);
    printf("Thread %ld returned %ld\n", t, (long)result);
  return 0;
                          File Edit Window Help Don'tLoseTheThread
```

```
Each thread receives its thread number.

Each thread returns its thread number + 1.
```

```
> ./param_test
Thread number 0
Thread 0 returned 1
Thread number 1
Thread number 2
Thread 1 returned 2
Thread 2 returned 3
>
```



There's no simple way to decide where to put the locks in your code. Where you put them will change the way the code performs. Here are two versions of the $drink_lots()$ function that lock the code in different ways.

Version A

```
pthread_mutex_t beers_lock = PTHREAD_MUTEX_INITIALIZER;
void* drink_lots(void *a)
{
   int i;
   pthread_mutex_lock(&beers_lock);
   for (i = 0; i < 100000; i++) {
      beers = beers - 1;
   }
   pthread_mutex_unlock(&beers_lock);
   printf("beers = %i\n", beers);
   return NULL;
}</pre>
```

Version B

```
pthread_mutex_t beers_lock = PTHREAD_MUTEX_INITIALIZER;
void* drink_lots(void *a)
{
  int i;
  for (i = 0; i < 100000; i++) {
    pthread_mutex_lock(&beers_lock);
    beers = beers - 1;
    pthread_mutex_unlock(&beers_lock);
}
  printf("beers = %i\n", beers);
  return NULL;
}</pre>
```

Both pieces of code use a mutex to protect the beers variable, and each now displays the value of beers before they exit, but because they are locking the code in different places, they generate different output on the screen.

Can you figure out which version produced each of these two runs?

```
File Edit Window Help Don'tLoseTheThread
> ./beer
2000000 bottles of beer on the wall
2000000 bottles of beer
beers = 1900000
beers = 1800000
beers = 1700000
beers = 1600000
beers = 1500000
beers = 1400000
beers = 1300000
beers = 1200000
beers = 1100000
beers = 1000000
beers = 900000
beers = 800000
beers = 700000
beers = 600000
beers = 500000
beers = 400000
beers = 300000
                                                                         7 Match the code to
beers = 200000
beers = 100000
                                                                          the output.
beers = 0
There are now 0 bottles of beer on the wall
                         File Edit Window Help Don'tLoseTheThread
                          > ./beer_fixed_strategy_2
2000000 bottles of beer on the wall
                         2000000 bottles of beer
                         beers = 63082
beers = 123
                         beers = 104
                         beers = 102
                          beers = 96
                          beers =
                                    75
                         beers = 67
                         beers = 66
                          beers = 65
                          beers = 62
                         beers = 58
                          beers = 56
                          beers = 51
                          beers = 41
                          beers = 36
                          beers = 30
                          beers = 15
                          beers = 14
                          beers = 0
                                                                                                517
                          There are now 0 bottles of beer on the wall
```



There's no simple way to decide where to put the locks in your code. Where you put them will change the way the code performs. Here are two versions of the $drink_lots$ () function that lock the code in different ways.

Version A

```
pthread_mutex_t beers_lock = PTHREAD_MUTEX_INITIALIZER;
void* drink_lots(void *a)
{
  int i;
  pthread_mutex_lock(&beers_lock);
  for (i = 0; i < 100000; i++) {
    beers = beers - 1;
  }
  pthread_mutex_unlock(&beers_lock);
  printf("beers = %i\n", beers);
  return NULL;
}</pre>
```

Version B

```
pthread_mutex_t beers_lock = PTHREAD_MUTEX_INITIALIZER;
void* drink_lots(void *a)
{
  int i;
  for (i = 0; i < 100000; i++) {
    pthread_mutex_lock(&beers_lock);
    beers = beers - 1;
    pthread_mutex_unlock(&beers_lock);
}
printf("beers = %i\n", beers);
return NULL;
}</pre>
```

Both pieces of code use a mutex to protect the beers variable, and each now displays the value of beers before they exit, but because they are locking the code in different places, they generate different output on the screen.

You were to figure out which version produced each of these two runs.

```
File Edit Window Help Don'tLoseTheThread
> ./beer
2000000 bottles of beer on the wall
2000000 bottles of beer
beers = 1900000
beers = 1800000
beers = 1700000
beers = 1600000
beers = 1500000
beers = 1400000
beers = 1300000
beers = 1200000
beers = 1100000
beers = 1000000
beers = 900000
beers = 800000
beers = 700000
beers = 600000
beers = 500000
beers = 400000
beers = 300000
beers = 200000
beers = 100000
                                                                     7 Match the code to
                                                                      the output.
beers = 0
There are now 0 bottles of beer on the wall
                        File Edit Window Help Don'tLoseTheThread
                        > ./beer_fixed_strategy_2
2000000 bottles of beer on the wall
                        2000000 bottles of beer
                        beers = 63082
beers = 123
                        beers = 104
                        beers = 102
                     beers = 96
                                  75
                        beers = 67
                        beers = 66
                        beers = 65
                        beers = 62
                        beers = 58
                        beers = 56
                        beers =
                                  51
                        beers = 41
                        beers = 36
                        beers = 30
                        beers =
                        beers = 15
                        beers = 14
                        beers = 0
                                                                                           519
                        There are now 0 bottles of beer on the wall
```



Congratulations! You've (almost) reached the end of the book. Now it's time to crack open one of those 2,000,000 bottles of beer and celebrate!

You're now in a great position to decide what *kind* of C coder you want to be. Do you want to be a **Linux hacker** using pure C? Or a **maker** writing embedded C in small devices like the Arduino?

Maybe you want to go on to be a **games developer** in C++? Or a **Mac** and iOS programmer in Objective-C?

Whatever you choose to do, you're now part of the community that uses and loves the language that has created more software than any other. The language behind the Internet and almost every operating system. The language that's used to *write almost all the other languages*. And the language that can write for almost every processor in existence, from watches and phones to planes and satellites.

New C Hacker, we salute you!

Dumb Questions

Does my machine have to have multiple processors to support threads?

No. Most machines have processors with multiple **cores**, which means that their CPUs contain miniprocessors that can do several things at once. But even if your code is running on a single core/ single processor, you will still be able to run threads.

Q: How?

A: The operating system will switch rapidly between the threads and make it appear that it is running several things at once.

Will threads make my programs faster?

A: Not necessarily. While threads can help you use more of the processors and cores on your machine, you need to be careful about the amount of locking your code needs to do. If your threads are locked too often, your code may run as slowly as single-threaded code.

How can I design my thread code to be fast?

Try to reduce the amount of data that threads need to access. If threads don't access a lot of shared data, they won't need to lock each other out so often and will be much more efficient.

Are threads faster than separate processes?

A: They usually are, simply because it takes a little more time to create processes than it does to create extra threads.

l've heard that mutexes can lead to "deadlocks." What are they?

A: Say you have two threads, and they both want to get mutexes A and B. If the first thread already has A, and the second thread already has B, then the threads will be deadlocked. This is because the first thread can't get mutex B and the second thread can't get mutex A. They both come to a standstill.

Your C Toolbox

You've got Chapter 12 under your belt, and now you've added threads to your toolbox.

For a complete list of tooltips in the book, see Appendix ii.

Simple processes do one thing at a time.

POSIX threads (pthread) is a threading library.

Threads allow a process to do more than one thing at the same time.

Threads are "lightweight processes."

pthread_create() creates a thread to run a function.

> pthread_join() will wait for a thread to finish.

Threads share the same global variables.

> If two threads read and update the same variable, your code will be unpredictable.

Mutexes are locks that protect shared data.

pthread_mutex_lock() creates a mutex on code.

> pthread_mutex unlock() releases the mutex.

521







C Lab 3

Blasteroids

This lab gives you a spec that describes a program for you to build, using the knowledge you've gained over the last few chapters.

This project is bigger than the ones you've seen so far. So read the whole thing before you get started, and give yourself a little time. And don't worry if you get stuck; there are no new C concepts in here, so you can move on in the book and come back to the lab later.

We've filled in a few design details for you, and we've made sure you've got all the pieces you need to write the code.


It's up to you to finish the job, but we won't give you the code for the answer.






Write the arcade game Blasteroids

Of course, one of the *real* reasons people want to learn C is so they can write **games**. In this lab, you're going to pay tribute to one of the most popular and long-lived video games of them all. **It's time to write** *Blasteroids*!

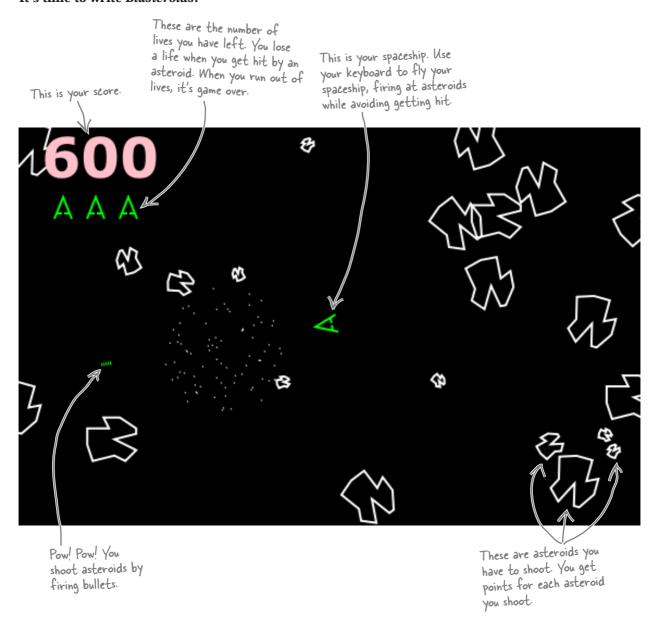

Your mission: blast the asteroids without getting hit


Sinister. Hollow. And all strangely similar. The asteroids are the bad guys in this game. They float and rotate slowly across the screen, promising instant death to any passing space traveler who happens to meet them.













Welcome to the starship Vectorize! This is the ship that you will fly around the screen using your keyboard. It's armed with a cannon that can fire at passing asteroids.

If an asteroid is hit by a blast from the spaceship's cannon, it immediately splits into two, and the player's score increases by 100 points. Once an asteroid has been hit a couple of times, it's removed from the screen.



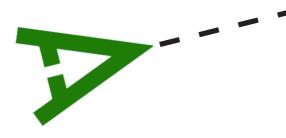

If the ship gets hit by an asteroid, you lose a life. You have three lives, and when you lose the last one, that's the end of the game.



Allegro

Allegro is an open source game development library that allows you to create, compile, and run game code across different operating systems. It works with Windows, Linux, Mac OS, and even phones.

Allegro is pretty straightforward to use, but just because it's a simple library doesn't mean it lacks power. Allegro can deal with sound, graphics, animation, device handling, and even 3D graphics if your machine supports OpenGL.

OpenGL is an open standard for graphics processors. You describe your 3D objects to OpenGL, and it handles (most) of the math for you.

Installing Allegro

You can get the source for Allegro over at the Allegro SourceForge website:

http://alleg.sourceforge.net/ ≤

You can download, build, and install the latest code from the source repository. There are instructions on the site that will tell you exactly how to do that for your operating system.

The Web gets updated more often than books, so this URL might be different. Check on your favorite search engine.

You may need CMake

When you build the code, you will probably also need to install an extra tool called **CMake**. CMake is a build tool that makes it a little easier to build C programs on different operating systems. If you need CMake, you will find all you need over at http://www.cmake.org.



The code we've supplied in this lab is for

version 5 of Allegro.

If you download and install a newer version, you may need to make a few changes.

What does Allegro do for you?

The Allegro library deals with several things:

GUIs

Allegro will create a simple window to contain your game. This might not seem like a big deal, but different operating systems have *very* different ways of creating windows and then allowing them to interact with the keyboard and the mouse.

Events

Whenever you hit a key, move a mouse, or click on something, your system generates an **event**. An event is just a piece of data that says what happened. Events are usually put onto queues and then sent to applications. Allegro makes it simple to respond to events so that you can easily, say, write code that will run if a user fires her canyon by hitting the spacebar.

Timers

You've already looked at timers at the system level. Allegro provides a straightforward way to give your game a **heartbeat**. All games have some sort of heartbeat that runs so many times a second to make sure the game display is continuously updated. Using a timer, you can create a game that, for example, displays a fresh version of the screen at 60 frames per second (FPS).

Graphics buffering

To make your game run smoothly, Allegro uses **double buffering**. Double buffering is a game-development technique that allows you to draw all of your graphics in an offscreen buffer before displaying it on the screen. Because an entire frame of animation is displayed all at once, your game will run much more smoothly.

Graphics and transformations

Allegro comes with a set of built-in graphics **primitives** that allow you to draw lines, curves, text, solids, and pictures. If you have an OpenGL driver for your graphics card, you can even do 3D. In addition to all of this, Allegro also supports **transformations**. Transformations allow you to rotate, translate, and scale the graphics on the screen, which makes it easy to create animated spaceships and floating rocks that can move and turn on the screen.


Sounds

Allegro has a full sound library that will allow you to build sounds into your game.


Building the game


You'll need to decide how you're going to structure your source code. Most C programmers would probably break down the code into separate source files. That way, not only will you be able to recompile your game quicker, but you'll also be dealing with smaller chunks of code at a time. That will make the whole process a lot less confusing.

There are many, many ways of splitting up your code, but one way is to have a separate source file for each element that will be displayed in the game:

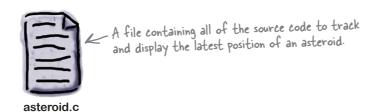



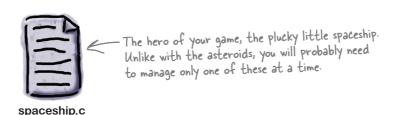

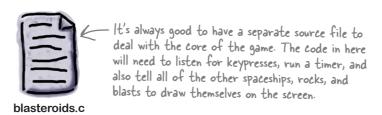

The spaceship

When you're controlling lots of objects on a screen, it's useful to create a struct for each one. Use this for the spaceship:

```
typedef struct {

float sx; Where it is on
float sy; the screen

The direction it's pointing

float heading;
float speed;
int gone;  Is it dead?

ALLEGRO_COLOR color;
} Spaceship;
```

What the spaceship looks like

If you set up your code to draw around the **origin** (discussed later), then you could draw the ship using code like this:

The variable s is a pointer to a Spaceship struct. Make the ship green.




```
al_draw_line(-8, 9, 0, -11, s->color, 3.0f);
al_draw_line(0, -11, 8, 9, s->color, 3.0f);
al_draw_line(-6, 4, -1, 4, s->color, 3.0f);
al_draw_line(6, 4, 1, 4, s->color, 3.0f);
```

Collisions

If your spaceship collides with a rock, it dies immediately and the player loses a life. For the first five seconds after a new ship is created, it doesn't check for collisions. The new ship should appear in the center of the screen.

Spaceship behavior

The spaceship starts the game stationary in the center of the screen. To make it move around the screen, you need to make it respond to keypresses:

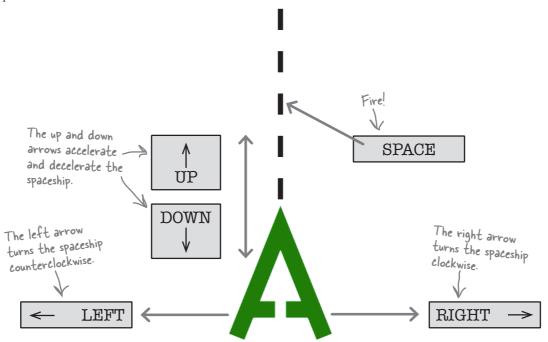

Make sure the ship doesn't accelerate too much. You probably don't want the spaceship to move forward more than a couple hundred pixels per second. The spaceship should never go into reverse.

Reading keypresses

The C language is used to write code for almost every piece of computer hardware in the world. But the strange thing is, there's no standard way to read a keypress using C. All of the standard functions, like fgets(), read only the keys once the return key has been pressed. But Allegro does allow you to read keypresses. Every event that's sent to an Allegro game comes in via a queue. That's just a list of data that describes which keys have been pressed, where the mouse is, and so on. Somewhere, you'll need a loop that waits for an event to appear on the queue.

Even functions such as getchar() tend to buffer any characters you type until you hit return.

```
ALLEGRO_EVENT_QUEUE *queue;
queue = al_create_event_queue(); You create an event queue like this.

ALLEGRO_EVENT event;
al_wait_for_event(queue, &event); This waits for an event from the queue.
```

Once you receive an event, you need to decide if it represents a keypress or not. You can do that by reading its type.

```
if (event.type == ALLEGRO_EVENT_KEY_DOWN) {
    switch(event.keyboard.keycode) {
    case ALLEGRO_KEY_LEFT: Turn the ship left.

    break;
    case ALLEGRO_KEY_RIGHT: Turn right.

    break;
    case ALLEGRO_KEY_SPACE: Fire!

    break;
}
```

The blast

Take that, you son of a space pebble! The spaceship's cannon can fire blasts across the screen, and it's your job to make sure they move across the screen. This is the struct for a blast:

```
typedef struct {
  float sx;
  float sy;
  float heading;
  float speed;
  int gone;
  ALLEGRO_COLOR color;
} Blast;
```

Blast appearance

The blast is a dashed line. If the user hits the fire key rapidly, the blasts will overlay each other and the line will look more solid. That way, rapid firing will give the impression of increased firepower.



Blast behavior

Unlike the other objects you'll be animating, blasts that disappear off the screen won't reappear. That means you'll need to write code that can easily create and destroy blasts. Blasts are always fired in the direction the ship is heading, and they always travel in a straight line at a constant speed—say, three times the maximum speed of the ship. If a blast collides with an asteroid, the asteroid will divide into two.

The asteroid

```
Use this struct for each asteroid:

Where it is on the screen

float sx;

float sy;

Which way it's headed

Current rotation

float twist;

float speed;

Speed of rotation per frame

float rot_velocity;

Scaling factor to change its size

float scale;

int gone;

ALLEGRO_COLOR color;

Asteroid;
```


Asteroid appearance

This is the code to draw an asteroid around the origin:

```
al_draw_line(-20, 20, -25, 5, a->color, 2.0f);
al_draw_line(-25, 5, -25, -10, a->color, 2.0f);
al_draw_line(-25, -10, -5, -10, a->color, 2.0f);
al_draw_line(-5, -10, -10, -20, a->color, 2.0f);
al_draw_line(-10, -20, 5, -20, a->color, 2.0f);
al_draw_line(5, -20, 20, -10, a->color, 2.0f);
al_draw_line(20, -10, 20, -5, a->color, 2.0f);
al_draw_line(20, -5, 0, 0, a->color, 2.0f);
al_draw_line(0, 0, 20, 10, a->color, 2.0f);
al_draw_line(20, 10, 10, 20, a->color, 2.0f);
al_draw_line(20, 10, 10, 20, a->color, 2.0f);
al_draw_line(10, 20, 0, 15, a->color, 2.0f);
al_draw_line(10, 20, 0, 15, a->color, 2.0f);
al_draw_line(0, 15, -20, 20, a->color, 2.0f);
```


How the asteroid moves

Asteroids move in a straight line across the screen. Even though they move in a straight line, they continually rotate about their centers. If an asteroid drifts off one side of the screen, it immediately appears on the other.

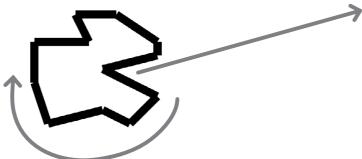

When the asteroid is hit by a blast

If an asteroid is hit by a blast from the spaceship's cannon, it immediately splits into two. Each of these parts will be half the size of the original asteroid. Once an asteroid has been hit/split a couple of times, it is removed from the screen. The player's score increases with each hit by 100 points. You will need to decide how you will record the set of asteroids on the screen. Will you create one huge array? Or will you use a linked list?

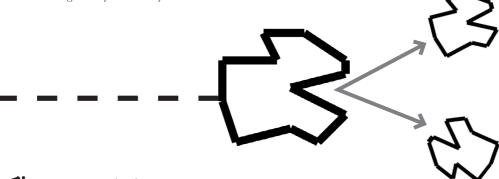

The game status

There are a couple of things you need to display on the screen: the number of lives you have left and the current score. When you've run out of lives, you need to display "Game Over!" in big, friendly letters in the middle of the screen.

Use transformations to move things around

You'll need to animate things around the screen. The spaceship will need to fly, and the asteroids will need to rotate, drift, and even change size. Rotations, translations, and scaling require quite a lot of math to work out. But Allegro comes with a whole bunch of *transformations* built in.


When you're drawing an object, like a spaceship, you should probably just worry about drawing it around the **origin**. The origin is the top-left corner of the screen and has coordinates (0, 0). The x-coordinates go across the screen, and the y-coordinates go down. You can use transformations to move the origin to where the object needs to be on the screen and then rotate it to point the correct way. Once that's all done, all you need to do is draw your object at the origin and everything will be in the right place.

For example, this is one way you might draw the spaceship on the screen:

```
void draw_ship(Spaceship* s)
{
   ALLEGRO_TRANSFORM transform;
   al_identity_transform(&transform);
   al_rotate_transform(&transform, DEGREES(s->heading));
   al_translate_transform(&transform, s->sx, s->sy);
   al_use_transform(&transform);
   al_draw_line(-8, 9, 0, -11, s->color, 3.0f);
   al_draw_line(0, -11, 8, 9, s->color, 3.0f);
   al_draw_line(-6, 4, -1, 4, s->color, 3.0f);
   al_draw_line(6, 4, 1, 4, s->color, 3.0f);
}
```

The finished product

When you're done, it's time to play Blasteroids!

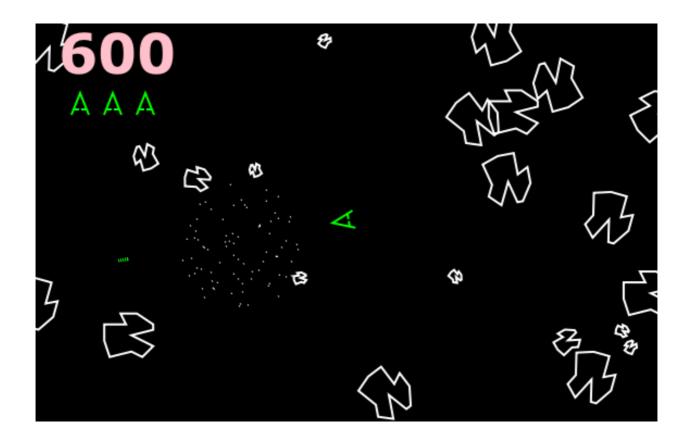

There are lots of other things you could do to enhance the game. As an example, why not try to get it working with OpenCV? Let us know how you get on at Head First Labs.

Leaving town...



It's been great having you here in Cville!


We're sad to see you leave, but there's nothing like taking what you've learned and putting it to use. There are still a few more gems for you in the back of the book and an index to read through, and then it's time to take all these new ideas and put them into practice. We're dying to hear how things go, so *drop us a line* at the Head First Labs website, *www.headfirstlabs.com*, and let us know how C is paying off for YOU!



i leftovers



* (we didn't cover)





Even after all that, there's still a bit more.

There are just a few more things we think you need to know. We wouldn't feel right about ignoring them, even though they need only a brief mention, and we really wanted to give you a book you'd be able to lift without extensive training at the local gym. So before you put the book down, **read through these tidbits**.

#1. Operators

We've used a few operators in this book, like the basic *arithmetic* operators +, -, *, and /, but there are many other operators available in C that can make your life easier.

Increments and decrements

An *increment* and a *decrement* increase and decrease a number by 1. That's a very common operation in C code, particularly if you have a loop that increments a counter. The C language gives you four simple expressions that simplify increments and decrements:

Each of these expressions will change the value of i. The position of the ++ and -- say whether or not to return the original value of i or its new value. For example:

int
$$i = 3$$
;
int $j = i++$; \leftarrow After this line, $j == 3$ and $i == 4$.

The ternary operator

540

What if you want one value if some condition is true, and a different value if it's false?

C has a *ternary operator* that allows you to compress this code right down to the following:

www.it-ebooks.info

Bit twiddling

C can be used for low-level programming, and it has a set of operators that let you calculate a new series of bits:

Operator	Description
~a	The value of a with all the bits flipped
a&b	AND the bits of a and b together
a b	OR the bits of a and b together
a^b	XOR the bits of a and b together
<<	Shift bits to the left (increase)
>>	Shift bits to the right (decrease)

The << operator can be used as a quick way of multiplying an integer by 2. But be careful that numbers don't overflow.

Commas to separate expressions

You've seen for loops that perform code at the end of each loop:

for
$$(i = 0; i < 10; i++)$$
 This increment will happen at the end of each loop.

But what if you want to perform more than one operation at the end of a loop? You can use the comma operator:

for
$$(i = 0; i < 10; i++, j++) \leftarrow |nerement | and j$$
.

The comma operator exists because there are times when you don't want to separate expressions with semicolons.

#2. Preprocessor directives

You use a preprocessor directive every time you compile a program that includes a header file:

```
#include <stdio.h> This is a preprocessor directive
```

The preprocessor scans through your C source file and generates a modified version that will be compiled. In the case of the #include directive, the preprocessing inserts the contents of the *stdio.h* file. Directives always appear at the start of a line, and they always begin with the hash (#) character. The next most common directive after #include is #define:

```
#define DAYS_OF_THE_WEEK 7
...
printf("There are %i days of the week\n", DAYS OF THE WEEK);
```

The #define directive creates a *macro*. The preprocessor will scan through the C source and replace the macro name with the macro's value. Macros aren't variables because they can never change at runtime. Macros are replaced *before* the program even compiles. You can even create macros that work a little like functions:

```
#define ADD_ONE(x) ((x) + 1) \( Be careful to use parentheses with macros. \)

printf("The answer is %i\n", ADD_ONE(3)); \( This is will output "The answer is 4." \)
```

The preprocessor will replace ADD_ONE (3) with ((3) + 1) before the program is compiled.

Conditions

You can also use the preprocessor for **conditional compilation**. You can make it switch parts of the source code on or off:

```
#ifdef SPANISH  | If the SPANISH macro exists...

char *greeting = "Hola"; ...include this code.

#else

char *greeting = "Hello"; | If not, include this code.

#endif
```

This code will be compiled differently if there is (or isn't) a macro called SPANISH defined.

542 appendix i

#3. The static keyword

Imagine you want to create a function that works like a counter. You could write it like this:

What's the problem with this code? It uses a global variable called count. Any other function can change the value of count because it's in the global scope. If you start to write large programs, you need to be careful that you don't have too many global variables because they can lead to buggy code. Fortunately, C lets you create a *global* variable that is available only inside the *local* scope of a function:

```
cope of a function:

The static keyword means

int counter() this variable will keep its value
between calls to counter().

static int count = 0;

inside this function.

return ++count;
```

The static keyword will store the variable inside the global area of memory, but the compiler will throw an error if some other function tries to access the count variable.

static can also make things private

You can also use the static keyword outside of functions. static in this case means "only code in this c file can use this." For example:

```
static int days = 365; 
You can use this variable only inside the current source file.

You can call this 
static void update_account(int x) {
function only from inside this source file.
}
```

The static keyword **controls the scope** of something. It will prevent your data and functions from being accessed in ways that they weren't designed to be.

#4. How big stuff is

You've seen that the sizeof operator can tell you how much memory a piece of data will occupy. But what if you want to know what **range of values** it will hold? For example, if you know that an int occupies 4 bytes on your machine, what's the largest positive number you can store in it? Or the largest negative number? You could, theoretically, work that out based on the number of bytes it uses, but that can be tricky.

Instead, you can use the macros defined in the *limits.h* header. Want to know what the largest long value you can use is? It's given by the LONG_MAX macro. How about the most negative short? Use SHRT_MIN. Here's an example program that shows the ranges for ints and shorts:

```
#include <stdio.h>
#include <limits.h>

int main()
{
   printf("On this machine an int takes up %lu bytes\n", sizeof(int));
   printf("And ints can store values from %i to %i\n", INT_MIN, INT_MAX);
   printf("And shorts can store values from %i to %i\n", SHRT_MIN, SHRT_MAX);
   return 0;
}

File Edit Window Help HowBigIsBig
   On this machine an int takes up 4 bytes
   And ints can store values from -2147483648 to 2147483647
   And shorts can store values from -32768 to 32767
```

The macro names come from the data types: INT (int), SHRT (short), LONG (long), CHAR (char), FLT (float), DBL (double). Then, you either add _MAX (most positive) or _MIN (most negative). You can optionally add the prefix U (unsigned), S (signed), or L (long) if you are interested in a more specific data type.

#5. Automated testing

It's always important to test your code, and life becomes a lot simpler if you *automate* the tests. Automated tests are now used by virtually all developers, and there are many, many testing frameworks used by C programmers. One that's popular at Head First Labs is called **AceUnit**:

http://aceunit.sourceforge.net/

AceUnit is very similar to the xUnit frameworks in other languages (like nUnit and jUnit).

If you're writing a command-line tool and you have a Unix-style command shell, then another great tool is called **shunit2**.

http://code.google.com/p/shunit2/

shunit2 lets you create shell scripts that test scripts and commands.

#6. More on gcc

You've used the *GNU Compiler Collection* (gcc) throughout this book, but you've only scratched the surface of what this compiler can do for you. gcc is like a Swiss Army knife. It has an immense number of features that give you a tremendous amount of control over the code it produces.



Optimization

gcc can do a huge amount to improve the performance of your code. If it sees that you're assigning the same value to a variable every time a loop runs, it can move that assignment outside the loop. If you have a small function that is used only in a few places, it can convert that function into a piece of *inline code* and insert it into the right places in your program.

It can do lots of optimizations, but most of them are switched off by default. Why? Because optimizations take time for the compiler to perform, and while you're developing code you normally want your compiles to be *fast*. Once your code is ready for release, you might want to switch on more optimization. There are four levels of optimization:

Flag	Description
-0	If you add a -0 (letter O) flag to your gcc command, you will get the first level of optimizations.
-02	For even more optimizations and a slower compile, choose -O2.
-03	For <i>yet more</i> optimizations, choose -O3. This will include all of the optimization checks from -O and -O2, plus a few extras.
-Ofast	The maximum amount of optimization is done with <code>-Ofast</code> . This is also the slowest one to compile. Be careful with <code>-Ofast</code> because the code it produces is less likely to conform to the C standards.

Warnings

Warnings are displayed if the code is technically valid but does something suspicious, like assign a value to a variable of the wrong type. You can increase the number of warning checks with **-Wall**:

```
gcc fred.c -Wall -o fred
```

The -Wall option means "All warnings," but for historic reasons is *doesn't* actually display *all* of the warnings. For that, you should also include -Wextra:

```
gcc fred.c -Wall -Wextra -o fred
```

Also, if you want to have *really strict* compilation, you can make the compile fail if there are any warnings at all with **-Werror**:

-Werror is useful if several people are working on the same code because it will help maintain code quality.

For more gcc options, see:

http://gcc.gnu.org/onlinedocs/gcc

#7. More on make

make is an incredibly powerful tool for building C applications, but you've only had a very simple introduction to it in this book. For more details on the amazing things you can do with make, see Robert Mecklenburg's *Managing Projects with GNU Make*:

http://shop.oreilly.com/product/9780596006105.do

For now, here are just a few of its features.

Variables

Variables are a great way of shortening your makefiles. For example, if you have a standard set of command-line options you want to pass to gcc, you can define them with a variable:

```
CFLAGS = -Wall -Wextra -v
fred: fred.c
    gcc fred.c $(CFLAGS) -o fred
```

You define a variable using the equals sign (=) and then read its value with \$ (\dots) .

Using %, ^, and @

Most of the time, a lot of your compile commands are going to look pretty similar:

```
fred: fred.c
gcc fred.c -Wall -o fred
```

In which case, you might want to use the % symbol to write a more general target/recipe:

```
If you're creating <file>, $\cdot\ \sigma : \sigma .c \\
then look for <file>.c.

$\frac{1}{2} \text{ is the dependency gcc $\frac{5}{2} - Wall -0 $\frac{5}{2} \text{ is name of the target.}}


value (the .c file).
```

This looks a little weird because of all the symbols. If you want to make a file called *fred*, this rule tells make to look for a file called *fred.c.* Then, the recipe will run a gcc command to create the target fred (given by the special symbol \$@) using the given dependency (given by \$@).

548 appendix i

Implicit rules

The make tool knows quite a lot about C compilation, and it can use *implicit rules* to build files without you telling it exactly how. For example, if you have a file called *fred.c*, you can compile it **without a makefile** by typing:

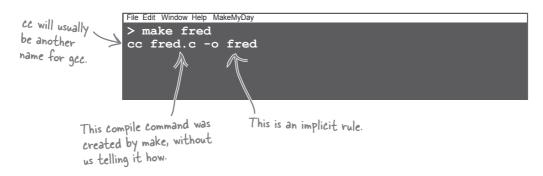

That's because make comes with a bunch of built-in recipes. For more on make, see:

http://www.gnu.org/software/make/

#8. Pevelopment tools

If you're writing C code, you probably care a lot about performance and stability. And if you're using the *GNU Compiler Collection* to compile your code, you'll probably want to take a look at some of the other *GNU* tools that are available.

adb

The GNU Project Debugger (gdb) lets you study your compiled program while it's running. This is invaluable if you're trying to chase down some pesky bug. gdb can be used from the command line or using an *integrated development environment* like Xcode or Guile.

http://sourceware.org/gdb/download/onlinedocs/gdb/index.html

gprof

If your code isn't as fast as you'd hoped, it might be worth *profiling* it. The *GNU Profiler* (gprof) will tell you which parts of your program are the slowest so that you can tune the code in the most appropriate way. gprof lets you compile a modified version of your program that will dump a performance report when it's finished. Then the gprof command-line tool will let you analyze the performance report to track down the slow parts of your code.

http://sourceware.org/binutils/docs-2.22/gprof/index.html

gcov

Another profiling tool is *GNU Coverage* (gcov). But while gprof is normally used to check the performance of your code, gcov is used to check which parts of your code did or didn't run. This is important if you're writing automated tests, because you'll want to be sure that your tests are running all of the code you're expecting them to.

http://gcc.gnu.org/onlinedocs/gcc/Gcov.html

#9. Creating GUIs

You haven't created any *graphical user interface* (GUI) programs in any of the main chapters of this book. In the labs, you used the *Allegro* and *OpenCV* libraries to write a couple of programs that were able to display very simple windows. But GUIs are usually written in very different ways on each operating system.

Linux — GTK

Linux has a number of libraries that are used to create GUI applications, and one of the most popular is the *GIMP toolkit* (GTK+):

http://www.gtk.org/

GTK+ is available on Windows and the Mac, as well as Linux, although it's mostly used for Linux apps.

Windows

Windows has very advanced GUI libraries built-in. Windows programming is a really specialized area, and you will probably need to spend some time learning the details of the Windows *application programming interfaces* (APIs) before you can easily build GUI applications. An increasing number of Windows applications are written in languages based on C, such as C# and C++. For an online introduction to Windows programming, see:

http://www.winprog.org/tutorial/

The Mac — Carbon

The Macintosh uses a GUI system called *Aqua*. You can create GUI programs in C on the Mac using a set of libraries called **Carbon**. But the more modern way of programming the Mac is using the Cocoa libraries, which are programmed using another C-derived language called *Objective-C*. Now that you've reached the end of this book, you're in a very good position to learn *Objective-C*. Here at Head First Labs, we *love* the books and courses on Mac programming available at the *Big Nerd Ranch*:

http://www.bignerdranch.com/

#10. Reference material

Here's a list of some popular books and websites on C programming.

Brian W. Kernighan and Dennis M. Ritchie, *The C Programming Language* (Prentice Hall; ISBN 978-0-131-10362-7)

This is the book that *defined* the original C programming language, and almost every C programmer on Earth has a copy.

Samuel P. Harbison and Guy L. Steele Jr., *C: A Reference Manual* (Prentice Hall; ISBN 978-0-130-89592-9)

This is an excellent C reference book that you will want by your side as you code.

Peter van der Linden, *Expert C Programming* (Prentice Hall; ISBN 978-0-131-77429-2)

For more advanced programming, see Peter van der Linden's excellent book.

Steve Oualline, *Practical C Programming* (O'Reilly; ISBN 978-1-565-92306-5)

This book outlines the practical details of C development.

Websites

For standards information, see:

http://pubs.opengroup.org/onlinepubs/9699919799/

For additional C coding tutorials, see:

http://www.cprogramming.com/

For general reference information, see:


http://www.cprogrammingreference.com/

For a general C programming tutorial, see:

http://www.crasseux.com/books/ctutorial/

ii c topics



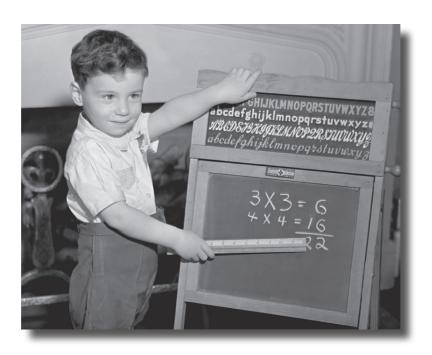

Ever wished all those great C facts were in one place?

This is a roundup of all the C topics and principles we've covered in the book. Take a look at them, and see if you can remember them all. Each fact has the chapter it came from alongside it, so it's easy for you to refer back if you need a reminder. You might even want to cut these pages out and tape them to your wall.

Basics

HAPTER

Simple statements are commands.

CHAPTER 1

Block statements are surrounded by { and }.

HAPTER

if statements run code if something is true.

CHAPTER

switch statements efficiently check for multiple values of a variable.

HAPTER 1

You can combine conditions together with $\frac{1}{2}\frac{1}{2}$ and $\frac{1}{2}$.

CHAPTER 1

Every program needs a main function.

CHAPTER 1

#include includes external code for things like input and output.

CHAPTER 1

Your source files should have a name ending in .c.

HAPTER

You need to compile your C program before you run it.

CHAPTER

gcc is the most popular C compiler.

HAPTER

You can use the & operator on the command line to only run your program if it compiles.

CHAPTER

-o specifies the output file.

HAPTER

count++ means add I to count.

HAPTER

count -- means subtract I from count.

CHAPTER

while repeats code as long as a condition is true.

HAPTER

do-while loops run code at least once.

CHAPTER

for loops are a more compact way of writing loops.

Pointers and memory

HAPTER 2

scanf("%i", \$\x') will allow a user to enter a number x directly.

IAPTER

Initialize a new array with a string, and it will copy it.

APTER

Ex returns the address of x.

HAPTER

Read the contents of an address a with *a.

HAPTER 2

Local variables are stored on the stack.

HAPTER 2

A char pointer variable x is declared as char *x.

HAPTER

Ex is called a pointer to x.

CHAPTER 2

Array variables can be used as pointers.

SHAPTER 2

fgets(buf, size, stdin) is a simpler way to enter text.

556

appendix ii

Strings

The string.h header contains Literal strings are stored in useful string functions. read-only memory. An array of strings is an array You create an array of arrays using char strings [...][...]. of arrays. strstr(a, b) will return the strcmp() compares two strings. address of string b in string a. CHAPTER 2.5 2.5 strchr() finds the location of streat() concatenates two a character inside a string. strings together. strlen() finds the length of a strepy() copies one string to string. another.

Data streams

HAPTER 3

C functions like printf() and scanf() use the Standard Output and Standard Input to communicate.

CHAPTER 3

The Standard Output goes to the display by default.

HAPTER

The Standard Input reads from the keyboard by default.

CHAPTER 3

You can change where the Standard Input, Output, and Error are connected to using redirection.

HAPTER

The Standard Error is a separate output intended for error messages.

CHAPTER 3

You can print to the Standard Error using fprintf(stderr,...).

MAPTER 3

You can create custom data streams with fopen ("filename", mode).

HAPTER 3

The mode can be "w" to write, "r" to read, or "a" to append.

Command—line arguments are passed to main() as an array of string pointers.

CHAPTER 3

The getopt() function makes it easier to read command—line options.

Data types

CHAPTER 4

chars are numbers.

CHAPTER 4

Use longs for really big whole numbers.

CHAPTER 4

Use shorts for small whole numbers.

CHAPTER.

Use ints for most whole numbers.

HAPTER

ints are different sizes on different machines.

SHAPTER 4

Use floats for most floating points.

CHAPTER 4

Use doubles for really precise floating points.

Multiple files

MAPTER 4

Split function declarations from definitions.

CHAPTER 4

Put declarations in a header file.

HAPTER

#include <> for library headers.

SHAPTER 4

#include " " for local headers.

MAPTER 4

Save object code into files to speed up your builds.

CHAPTER 4

Use make to manage your builds.

Structs

CHAPTER 5

A struct combines data types together.

MAPTER 5

You can read struct fields with dot notation.

CHAPTER &

You can intialize structs with {array, like, notation}.

SHAPTER (

-> notation lets you easily update fields using a struct pointer.

CHAPTER 5

typedef lets you create an alias for a data type.

HAPTER 5

Designated initializers let you set struct and union fields by name.

Unions and bitfields

MAPTER 5

unions can hold different data types in one location.

CHAPTER 5

enums let you create a set of symbols.

CHAPTER 5

Bitfields give you control over the exact bits stored in a struct.

Data structures

CHAPTER 6

Dynamic data structures use recursive structs.

CHAPTER 6

Recursive structs contain one or more links to similar data.

HAPTER (

A linked list is a dynamic data structure.

CHAPTER 6

Data can be inserted easily into a linked list.

MAPTER 6

A linked list is more extensible than an array.

Dynamic memory

HAPTER 6

The stack is used for local variables.

CHAPTER 6

Unlike the stack, heap memory is not automatically released.

HAPTER

malloc() allocates memory on the heap.

CHAPTER 6

free() releases memory on the heap.

HAPTER

strdup() will create a copy of a string on the heap.

CHAPTER 6

A memory leak is allocated memory you can no longer access.

SHAPTER (

valgrind can help you track down memory leaks.

Advanced functions

MAPTER 7

Function pointers let you pass functions around as if they were data.

CHAPTER ?

The name of every function is a pointer to the function.

CHAPTER 7

Each sort function needs a pointer to a comparator function.

HAPTER 7

Arrays of function pointers can help run different functions for different types of data.

CHAPTER 7

Function pointers are the only pointers that don't need the * and \$\xi\$ operators, but you can use them if you want to.

CHAPTER 7

qsort() will sort an array.

CHAPTER 7

Comparator functions decide how to order two pieces of data.

Functions with a variable number of arguments are called "variadic."

HAPTER 7

stdarg.h lets you create variadic functions.

Static and dynamic libraries

CHAPTER 8

#include <> looks in standard directories such as /usr/include.

HAPTER 8

-L<name> adds a directory to the list of standard library directories.

CHAPTER 8

-I<name> links to a file in standard directories such as /usr/lib.

HAPTER 8

-I<name> adds a directory to the list of standard include directories.

MAPTER 8

The ar command creates a library archive of object files.

CHAPTER 8

Library archives have names like libsomething.a.

CHAPTER 8

Library archives are statically linked.

CHAPTER 8

"gcc -shared" converts object files into dynamic libraries.

Dynamic libraries are linked at runtime.

CHAPTER 8

Dynamic libraries have different names on different operating systems.

HAPTER 8

Dynamic libraries have .so, .dylib, .dll, or .dll.a extensions.

Processes and communication

CHAPTER 9

system() will run a string like a console command.

CHAPTER 9

fork() duplicates the current process.

HAPTER

fork() + exec() creates a child process.

HAPTER 9

execl() = list of args.

execle() = list of args + environment.

execlp() = list of args + search on path.

execv() = array of args.

execve() = array of args + environment.

execvp() = array of args + search on path.

HAPTER 10

Processes can communicate using pipes.

CHAPTER 10

pipe() creates a communication pipe.

HAPTER 10

exit() stops the program immediately.

CHAPTER 10

waitpid() waits for a process to finish.

MAPTER 10

fileno() finds the descriptor.

CHAPTER 16

dup2() duplicates a data stream.

SHAPTER 1

Signals are messages from the O/S.

CHAPTER 10

sigaction() lets you handle signals.

HAPTER 1

A program can send signals to itself with raise().

CHAPTER 10

alarm() sends a SIGALRM after a few seconds.

CHAPTER 1

The kill command sends a signal.

CHAPTER 12

Simple processes do one thing at a time.

Sockets and networking

CHAPTER 11

telnet is a simple network client.

CHAPTER 11

Create sockets with the socket() function.

HAPTER 11

Servers BLAB:

B = bind()

L = listen()

A = accept()

B = Begin talking.

CHAPTER 11

Use fork() to cope with several clients at once.

CHAPTER 11

DNS = Domain name system.

HAPTER 11

getaddrinfo() finds addresses by domain.

Threads

HAPTER 12

Threads allow a process to do more than one thing at the same time.

CHAPTER 1

Threads are "lightweight processes."

HAPTER 1

POSIX threads (pthread) is a threading library.

HAPTER 1

pthread_create() creates a thread to run a function.

HAPTER 1

pthread_join() will wait for a thread to finish.

CHAPTER 12

Threads share the same global variables.

IAPTER 1

If two threads read and update the same variable, your code will be unpredictable.

HAPTER 12

Mutexes are locks that protect shared data.

HAPTER 12

pthread_mutex_lock() creates a mutex on code.

HAPTER 12

pthread_mutex_unlock() releases the mutex.





Symbols & Numbers

\$ (dollar sign), \$%, \$^, and \$@ compiler commands for makefiles 548

\0 sentinel character 12

& (ampersand)

bitwise AND operator 20, 541 && (logical AND) operator 18, 20 reference operator 43, 48

< > (angle brackets)

>> (bitwise shift left) operator 541 in header files 180, 354 redirecting Standard Input with < 111 redirecting Standard Output with > 112, 430 redirection using > and 2> operators 432

* (asterisk)

accessing array elements 61 indirection operator 48 in variable declarations 74

^ (caret), bitwise XOR operator 541

, (comma)

separating expressions 541 separating values in enums 255

{ } (curly braces)

enclosing function body 6 enclosing statements 14

. dot notation, setting value of unions 248

. (dot) operator, reading struct fields 222

... (ellipsis) 345

= (equals sign) assignment operator 13 == (equality) operator 13 ! (exclamation mark), not operator 18 # (hash mark), beginning preprocessor directives 542 - (minus sign) -- (decrement) operator 13, 540 negative numbers and command-line arguments 155 prefacing command-line options 155 -= (subtraction and assignment) operator 13 () (parentheses), caution with, when using structs 240 % (percent sign) %li format string 52 %p format string 48, 52 | (pipe symbol) bitwise OR operator 20, 541 connecting input and output with a pipe 131 | | (logical OR) operator 18, 20 + (plus sign) += (addition and assignment) operators 13 ++ (increment) operator 13, 540 -> pointer notation 241, 245 ? (question mark) 540 ?: (ternary) operator 540 "" (quotation marks, double) enclosing strings 13

in header files 180, 354

" (quotation marks, single) in strings 13

; (semicolon), separating values in structs and unions 255	finished product 215
/ (slash)	plant monitor and moisture sensor 208
/* and */ surrounding comments 8	useful functions 214
// beginning comments 8	writing C code in Arduino IDE 209
[] (square brackets)	args parameter 345
array subindex operator 61	arguments, function 32
creating arrays and accessing elements 96	fixed argument in variadic functions 345, 346
in variable declarations 74	array functions, execv(), execvp(), and execve() 406
\sim (tilde), bitwise complement operator 541	arrays 11
_ (underscore), replacing spaces in web page name 498	array of arrays versus array of pointers 98
8-bit operating systems 168	assigned to pointers, pointer decay and 59
32-bit operating systems 168	char pointers versus char arrays in data structure 286
size of pointers 54	creating array of arrays 85, 96
64-bit operating systems 168	fixed length of 268
size of pointers 54	of function pointers 338-342
	indexes 13, 61
Λ	length of 13
\mathbf{A}	linked lists versus 274
accept() function 471	strings as character arrays 12
AceUnit framework 545	structs versus 220, 225
alarm() function 458	using to copy string literals 74
calls to, resetting the timer 459	variables declared as 74
sleep() function and 458	array variables
alarm signal, SIGALRM 458	differences from pointers 59
Allegro library 526	use as pointers 54
creation of game elements 527	Assembly language, translation of C code into 184
AND operator (&) 20, 541	assignments
AND operator (&&) 18, 20	= (assignment) operator 13
animation, using transformations 535	chaining 33
ANSI C 2	compound assignment operators 13
Arduino 207–216	struct assigned to another variable 226
Arduino board 209	struct to another struct 238
building the physical device 210	associated arrays or maps 296
C code for, what it does 212	asteroids (Blasteroids game) 533
	autoconf tool 202

automated testing 545	
automating builds with make tool 198	U
	С
В	basics of 554
n	how it works 2
binary literals, not supported in C 261, 265	reference materials for programming 552
binary numbers 163	similarities to and influence on other languages 39
binary trees 296	C++ 39
binary values, converting between hexadecimal and 261	C11 standard 2
binding to a port 470	c89 notation for first field of a union 248
bitfields 262, 265, 563	C99 standard 2
using to construct customer satisfaction survey	cameras
(example) 263	grabbing image from webcam 392
bit size of computers 168	showing current webcam output 393
bits, operators for manipulation of 541	taking input from computer camera 392
bitwise AND operator (&) 20, 541	Carbon libraries 551
bitwise complement operator (~) 541	card counting 16
bitwise OR operator () 20, 541	program for, writing in C 17, 19-21
bitwise shift left operator (<<) 541	modifying program to keep running count of card
bitwise XOR operator (^) 541	game 35
BLAB: Bind, Listen, Accept, Begin 470	testing program 38
Blasteroids game. See game, Blasteroids project	case statements 26, 28
blasts fired by spaceship (Blasteroids game) 532	casting floats to whole numbers 164
block statements 14	chaining assignments 33
body of a function 6	char** pointer 320, 333
boolean operators 18	char type 159, 161
boolean values, representation in C 18	arithmetic with 182
bound port, reuse by socket 477	char pointers versus char arrays in data structure 286
break statements 26, 28, 39	defined 162
exiting loops 31	checksum() function 352
not breaking out of if statements 31	child process 420, 450
buffer overflows caused by scanf() function 66	clients talking to server 486
build tools 202	listening to directly 442
CMake 526	piped commands on command line 443
bus errors 13	redirecting Standard Output to file 435-440
	running with fork() and exec() 421-425

classes, structs versus 225	connection, accepting from client 471
CMake 526	constants
Cocoa libraries 551	defined 80
collisions 529	string literals as 73
command-line arguments	const char 218, 220
avoiding ambiguity by splitting main arguments from options using 155	const keyword 76, 79 continue statements 31, 39
execl(), execlp(), and execle() functions 405	control statements 14
main() function with 141	convert command 449
command-line options 148	count variable 543
questions and answers on 155	create() function, using dynamic allocation 282, 284
using getopt() function for 149	fixing with strdup() function 286
command line, piping commands together on 443	CreateProcess() function (Windows systems) 426
command path 409	C Standard Library 127
commands, types of 14	Ctrl-C, stopping programs 451
comma-separated data, reading and displaying in JSON	curl/wget programs 449
format 105	cvCalcOpticalFlowFarneback() function 393
comma (,), separating expressions 541	cvCreateCameraCapture() function 392
comments 5	cvNamedWindow() function 393
formatting 8	cvQueryFrame() function 392
comparator functions 327–333	cvShowImage() function 393
writing for different sort descriptions 328–333	Cygwin 449
compilation 2	fork() function and 426
automating builds with make tool 198–205 behind-the-scenes look at 184	including PATH variable when passing environment variables on 407
compiling a program using gcc 9	installing before calling fork() on Windows 420
partial compiles 191–196	telnet program 468
precompilation and 180	temet program 100
reason for compiling C 39	T9
speeding up for programs in multiple source files 189	D
compiled code, saving copies of 190	data antw
compilers 9. See also gcc	data entry capabilities of scanf() versus fgets() 68
BE the Compiler exercise 23	fgets() as alternative to scanf() 67
C standard supported by 8	using pointers for 65
debug information from 308	~ *
finding standard header file directories 355	data streams creating your own 138
interview with gcc 22	duplication with dup2() function 433
conditional compilation 542	aupheauon with aupz() function 433

handling in a typical process 431 opening, checking for problems with 147 printing to 122 replacement by redirection 432 sockets 470 summary of important points 558 typical data streams versus sockets 472 data structures questions and answers about 274 summary of important points 564 types other than linked lists 295 data types 158 bytes in memory occupied by, getting with sizeof 280 casting floats to whole numbers 164 data not having single type 246 errors caused by conflicting types in example program 170 macros determining size of 544 matching type of value to type of variable it's stored in 163 no function data type in C 319 parameters in variadic functions 349 pointer variables 62 prefixing with unsigned or long keywords 164 process ID 423 quick guide to 162 size of 167 sizes on different operating systems 168 structs 220 summary of 560 unions 249 values stored in unions 254 deadlocks 520 debugger edb, 550	decimal point numbers. See also floating-point numbers; float type computers' representation of 168 declarations defined 79 function, splitting from definition 173, 561 decrement operator () 13, 540 #define directive 542 definitions, function, splitting from declaration 173, 561 dependencies 198 identifying for make tool 199 dereferencing 48, 52 descriptor table important points about 440 Standard Input, Output, and Error in 432 designated initializers 248, 265 setting initial values of struct fields 249 design tips for small tools 129 /dev/tty program 441 development tools 550 device drivers 403 DNS (domain name system) 493 domain names 491 connecting client socket to remote domain name 492 creation of sockets with IP addresses or domain names 499 double type 159, 161 defined 162 doubly linked lists 296 do-while loops 29, 39 dup2() function 433 dynamic libraries 351, 568 dynamic storage 276–280, 294
debugger, gdb 550 decay 59	dynamic storage 276–280, 294 using the heap 278
	•

T.	execle() function 407
E	failures of 408
echo command 401	program searching many RSS feeds at once (example) 418
ellipsis () 345	executables 2, 185
email, sending from command line 449	exit() function 434
encrypt() function 352	called by default signal handler for interrupt signal
encryption, XOR 182	451
enums 255, 260	important points about 441
responses in mail merge program (example) 334	exit status of child process 439
tracking values stored in structs and unions 256–259 environment variables	extern keyword 186
parameters for execv(), execvp(), and execve() functions 406	F
parameters for exel(), execlp(), and execle() functions 405	Feldman, Stuart 202
reading and passing to functions 407	fgets() function 450, 451
equality operator (==) 13	as alternative to scanf() 67
errno variable 408	using for data input, scanf() versus 68
error handling, avoiding writing duplicate code for system calls 434	file descriptors 431 descriptor tables 441
error messages	fileno() function 433
converting errno into 408	files, making program work with 109
displaying when Standard Output is redirected 118	filters 109
Standard Error 120	find() function 313–315
/etc/services file 472	other types of searches 321
.exe files (Windows) 10	floating-point numbers 159
exec() functions 404, 427	handling with floats and doubles 168
array functions, execv(), execvp(), and execve() 406	float type 159
failures of calls to 408	casting to whole numbers 164
important points about 411	defined 162
list functions, execl(), execlp(), and execle() 405	finding size of 167
many versions of 405	fopen() function 138
order-generation program, Starbuzz coffee (example) 412–415	problem opening data stream 147 fork() function 420, 427
program searching many RSS feeds at once (example) 418	creating a process for each client 486
program termination after call to 420	important points about 426
running child process with fork() and exec() 421425	running child process with fork() + exec() $421-425$
running /sbin/ifconfig or ipconfig (example) 409	calling fork() 423

for loops 30, 39	
format strings, passing to scanf() function 65	U
formatted output, display by printf() function 6	game, Blasteroids project 523-538
fprintf() function 122	Allegro library 526
updating example mapping program to use 123	asteroids 533
freeaddrinfo() function 493	blasting asteroids without being hit 525
free() function 279	blasts fired by spaceship 532
call interception by valgrind 308	building the game 528
releasing memory with 280	finished product 536
tracking calls to with valgrind 302	game status 534
fscanf() function 122	reading key presses 531
functions 5, 311–350	spaceship 529
advanced, summary of important points 566	spaceship behavior 530
Arduino 214	using transformations 535
find() function 313–315	writing arcade game 524
macros versus 346	garbage collection, C and 294
main() function 6	gcc 9
no function data type in C 319	finding standard header file directories 355
operators versus 56	GNU Compiler Collection 39
order in a program 171	interview with 22
order of running in a program 96	-I option 356
passing as parameter to another function 317-324	optimizations 546
creating function pointers 320	standards supported 8
identifying function pointers 324	warnings 547
passing code to 316	gcov (GNU Coverage) 550
passing pointer to variable as function parameter 47	gdb (GNU Project Debugger) 550
passing strings to 53	getaddrinfo() function 493
passing struct to function that updates struct 238	GET command 490
sorting data 325–342	getenv() function 407
using function pointers to set sort order 326	getopt() function 149, 155
splitting declaration from definition 173, 561	gets() function, reasons not to use 67
variables declared inside 43	globals
variadic 343–349	defined 80
writing example function 347–349	variables declared outside of functions 43
void return type 33	global variables 96
writing 32	count 543
	errno 408
	storage in memory 47

GNU Compiler Collection. See gcc	T
GNU Coverage (gcov) 550	1
GNU Profiler (gprof) 550	IDE, Arduino 209
GNU Project Debugger (gdb) 550	if statements 14
golden rules of failure 408	break statements and 31
gprof (GNU Profiler) 550	checking same value repeatedly 25
grep command 443	replacing sequence of switch statement 27
GTK library 551	ignoring signals 459
GUIs (graphical user interfaces), creating 551	interrupt signal 456
	images
Īī	converting image formats 449
Π	grabbing image from webcam 392
hardware, kernel and 403	#include directive 184, 542
header files	angle brackets in 354
angle brackets in 354	header files at different locations 356
creating 174	including header file in main program 174
forgetting to include 96	includes section, C programs 5
function declarations in 173	increment operator (++) 13, 540
quotes and angle brackets in 180	indexes, array 13
for shared code 186	starting at 0 61
sharing between programs 355	indirection operator (*) 48
heap	infinite loops 39
allocating and releasing memory 289	integers 159
allocating storage for string copy 285	interprocess communication 429-466
defined 80	avoiding duplicate error-handling code for each
differences from the stack 292	system call 434
important points about 294	catching signals and running your own code 452–456
releasing memory when you're done 279	connecting processes with pipes 443
using for dynamic storage 278	death of a process 451
hexadecimal literals 261	duplicating data streams with dup2() 433
hexadecimals, converting between binary and 261	examining a typical process 431
hex format, memory addresses 48, 52	finding RSS news stories and opening them in a browser 444–449
h files. See header files	getting descriptor with fileno() 433
hostname 490	listening to child process directly 442
HTTP (Hypertext Transfer Protocol) 469, 490	processes redirecting themselves 432

program saving output of rssgossip.py script to file 435	T
program testing math skills (example) 460-464	
questions and answers about 441	JSON, displaying comma-separated data as 105
redirecting input and output 430	
redirection replacing data streams 432	17
resetting and ignoring signals 459	K
sending alarm signal to processes 458	kernel 403
summary of important points 570	keypresses, reading 531
using kill command to send signals 457	kill command, using to send signals 457
using raise() to send signals 457	, 0
waitpid() function 438-440	T
interrupt signal 451	L
ignoring 456	LED
intruder detector 390	C code writing to 212
finished product 394	connecting to Arduino board 210
int type 159	libraries
compiler assumption as return type for unknown functions 171, 181	Allegro game development library 526
defined 162	GUI (graphical user interface) 551
finding size of 167	static and dynamic 568
I/O (input/output)	limits.h header, macros defined in 544
connecting input and output with a pipe 131–136	linked lists 269
displaying error messages when output is redirected 118	creating 271
output to more than one file 137	creating and releasing heap memory 287-291
redirecting 430	inserting values into 273
redirecting output from display to files 109	linking object code files 185, 191
redirecting Standard Input with < operator 111	Linux. See also operating systems
redirecting Standard Output with > operator 112	GTK GUI library 551
redirection 110	listen() function 471
ipconfig 409	listen queue for clients 471
IP (Internet Protocol) 469	list functions, execl(), execlp(), and execle() 405
IP (Internet Protocol) addresses 491	local variables, storage in stack 47, 278
converting domain names to 493	locks 513
creating socket for an IP address 492	creating a mutex lock 514
creation of sockets with IP addresses or domain names	deciding where to put locks in code (example) 516519
499	long keyword 164

LONG_MAX macro 544	malloc() function 278
long type 159, 161	asking for memory with 280
defined 162	call by strdup() function 294
passing long values to thread functions 515	call interception by valgrind 308
loops	tracking calls to with valgrind 302
breaking out of with break statement 31	memory 41, 565
continue statement in 31	addresses 47
running forever, infinite loops 39	allocating heap memory and releasing it 289
structure of 30	C toolbox 81
	differences between the stack and the heap 292
M	freeing by calling free() function 279, 280
IV]	getting with malloc() function 278
Mac computers. See also operating systems	kernel control over 403
Carbon library for GUIs 551	order of segments in 79
script for talking to plants 215	overview of computer memory 43
machine code 2, 185	and pointers 556
macros 139	questions and answers about 52
creating 542	requesting with malloc() function 280
functions versus 346	reuse of space with unions 247
mail/mutt programs 449	string literals stored in read-only memory 73
main() function 6	structs stored in 226
with command-line arguments 141	summary of segments 80
ending program with exit() instead of 441	memory leaks 279
makefiles 200	avoding when using data structures 296
on different operating systems 202	tracking and fixing using valgrind tool 302-308
generation with autoconf tool 202	mingw32-make 199
make tool 198–205, 225	MinGW, spaces in command-line arguments 405
additional features 548	mkfifo() function 450
automating builds with 198	moisture sensor
converting Ogg Vorbis music file to Swing version 203	building 210
different name on Windows 199	C code reading from 212
how it works 199	connecting to Arduino 211
implicit rules to build files 549	movement, detecting 393
uses other than compiling code 202	mutexes 513
	causing deadlocks 520
	creating a mutex lock 514

NT	makefiles and 202
N	network configuration commands 409
named pipes 450	OpenCV 391
nested structs 227	registering new item in file descriptor table 433
network configuration, commands for 409	Standard Input and Standard Output 110
networking. See sockets and networking	system calls 398
NMAKE tool 199	telnet program 468
not operator (!) 18	operators 540
NULL value, following last command-line argument in	functions versus 56
exec() function parameters 405	precedence of 240, 243
	optarg variable 149, 155
\mathbf{O}	optimization 546
O	optind variable 149
object code 185	OR operator () 20, 541
saving copies into files 190	OR operator () 18, 20
object files, sharing between programs 355	
Objective-C 39, 551	D
object orientation 39	1
.o files 355. See also object code	parameters, function 6, 32
Ogg Vorbis music file, converting to Swing version 203	passing by value 238
OpenCV 389–394	parent process 420, 450
C code, what it should do 392	piped command on command line 443
defined 391	server 486
finished product 394	partial compiles 191-196
installing 391	PATH variable 406
intruder detector 390	including when passing environment variables on Cygwin 407
operating systems	performance, analyzing with gprof 550
commands to open a URL 446	PIDs (Process Identifiers) 404
controlling programs with signals 451	pid_status parameter of waitpid() function 441
different sizes of data types on 167, 168	pid_t in call to fork() 423
GUI libraries for 551	waitpid() function parameters 439
interview with 127 kernel 403	pipe() function 450
listing processes running on system 404	connecting Standard Output of child and Standard Input of parent processes 444

pipes	variables declared as function arguments 74
connecting input and output 131-136	void 506
connecting output of rssgossip.py to input of program	port, binding to 470
444-449	port number for server application, caution in choosing
connecting processes with 443	472
important points about 450	POSIX libraries 149
pointer arithmetic	POSIX thread library (pthread) 506
and array index starting at 0 61	linking 508
and data types of pointer variables 62	precompilation 180
important points about 64	preprocessing 180
pointer notation with structs 241	fixing the source 184
pointers 42	preprocessor directives 542
address of variable in memory 43	printf() function 6
array of arrays versus array of pointers 98	reading from keyboard and writing to display 110
array variables as 54	variable number of arguments 343
char pointers versus char arrays in data structure 286	printing to data stream with fprintf() function 122
conversion to ordinary number 56	private scope 543
C toolbox 81	processes. See also interprocess communication
differences of array variables from 59	cloning with fork() function 420
file 433	communication, summary of important points 570
function 318-324, 324, 566	control by kernel 403
arrays of 338–342	examining a typical process 431
creating 319	redirecting themselves 432
summary of important points 342 using to set sort order 326	replacement of current process using exec() function 404
making it easier for functions to share memory 47	running child process with fork() + exec() 421-425
passing pointer to variable as function parameter 47	server and client, creating processes for clients with fork() 486
questions and answers about 52	simple, doing one thing at a time 504
in recursive structures 271	speed of, threads versus 520
set to string literals, avoiding 76	using for simultaneous tasks, limitations of 503
sizes on different computers 56	Process Identifiers. See PIDs
and structs assigned to another variable 226	profiling tools 550
to structs 239	programs
summary of important points 556	compiling and running 9
types assigned to pointer variables 62	complete C program 5
using for data entry 65 using to read and write data 48	exercise, matching candidate block of code with possible output 34, 36

protocols 469, 490	reserved words in C 181
ps -ef command 404	return statements in functions 32, 39
pthread_create() function 507	return type 6
pthread_join() function 507	compiler assumptions for unknown functions 171
PTHREAD_MUTEX_INITIALIZER macro 514	void return type for thread functions 506
pthread_mutex_lock() function 514	return values, assignments 33
pthread_mutex_unlock() function 514	reusing code 182
pthread (POSIX thread) library 506	RSS feeds
linking 508	program saving output of rssgossip.py script to file 435
Python installing 416	program searching many feeds at once (example) 417–425
RSS Gossip script 416	running rssgossip.py in separate process for each feed 422
_	reading news with 416
0	reading story links from rssgossip.py script 442
qsort() function 326	running rsscossip.py script and opening stories in browser 444
	RSS Gossip (Python script) 416
R	running programs 9
raise() command, sending signals with 457	S
recursive structures 294, 564	
creating 271	ifconfig program 409
recv() function 478, 493	/sbin/ifconfig program 409
redirection 110	scanf() function 65, 79
child process output to file 435–440	causing buffer overflows 66
descriptor table and 441	fgets() function as alternative to 67
displaying error messages when output is redirected	passing pointer to variable to scanf() 239
output from display to files 109	using for data input, fgets() versus 68
processes redirecting themselves 432	screen, redirecting data to, without using Standard Output 441
programs run from command line 430	security, system calls and 402
replacement of data streams 432	send() function 472, 493
several processes connected with pipes 136	sentinel character \0 12
Standard Input, using < operator 111	serial port, writing to (C code in Arduino) 212
Standard Output, using > operator 112	setitimer() function 459
reference operator (&) 43, 48	sharing code 182–187, 355
references, pointers versus 52	.h header files 356

short type 159, 161 defined 162	client sockets, creation and connection to remote port 492
SHRT_MIN macro 544	creation of sockets with IP addresses or domain names
shunit2 tool, testing scripts and commands 545	C toolbox 500
sigaction() function 453	fork() a process for each client 486
sigaction structs 452	how servers talk to the Internet 470
SIGALRM signal 458	Internet knock-knock server (example) 468
SIGKILL signal 457	other useful server functions 479
signals 451	reading from the client 478
catching and running your own code 452–456 ignoring 459	server can only talk to one client at a time 485
	•
matching to cause (example) 455	server code changed to fork child process for each client 487–489
order of sending and receiving 465	server generating random advice for clients (example) 473
program testing math skills (example) 460-464	
resetting to default handler 459	sockets not your typical data streams 472
sending using kill command 457	summary of important points 572
sending using raise() 457	writing a web client 490, 494–498
signed values in binary 163	writing code for Internet knock-knock server (example) 480–484
SIGTERM signal 457	sorting 325–342
single statement 14	using function pointers to set sort order 326
size limits for data types, macros determining 544	writing comparator functions for different sorts
sizeof operator 53, 56	328–333
getting bytes in memory occupied by particular data type 280	source files 2
use on pointers and array variables 59	compiling and running 9
using with fgets() function 67	multiple files for code 561
sleep() function 508	spaceship (Blasteroids game) 529
alarm() function and 458	behavior of 530
small tools	stack 43
connecting input and output with a pipe 131-136	defined 80
converting data from one format to another 104–107	differences from the heap 292
designing, tips for 129	storage in 278
different tasks need different tools 130	Standard Error 120, 558
flexibility of 128	default output to display 121
output to multiple files 137	in descriptor table 432
sockets and networking 467–500	redirecting with 2> 122, 432
clients obtaining a socket and communicating 491	standard header directories 355
client sockets, creating socket for a domain name 493	standard header files 180

Standard Input 122, 558	copying 285
connecting to Standard Output of another process 131	creating array of arrays 85
in descriptor table 432	crossword puzzle (example) 99
redirecting 110	C toolbox 101
redirecting with < operator 111	displaying string backward on screen 97
Standard Output 558	ending with sentinel character \0 12
connecting to Standard Input of another process 131	passing to functions 53
in descriptor table 432	searching 84, 86
redirecting child process output to file 435	Pool Puzzle example 90
redirecting to file 112, 430	review of jukebox program (example) 94
standards 2	testing jukebox program (example) 95
compiler support of 8	Standard Library, string.h 86–88
designated initializers 248	arrays of, char** pointer to 320
POSIX libraries 149	summary of important points 557
return statements in functions 32	using strstr() function 89
statements 14	strstr() function 89
static keyword 543	structs 217–246, 260, 274
static libraries 351, 568	arrays versus 220, 225
stdarg.h header 345	assignment 238
storage, flexible 268	benefits of using 221
strcmp() function 331, 333	bitfields collected in 262
strdup() function 285	creating aliases for with typedef 232
calling malloc() function 294	designated initializers setting initial value of fields 249
fixing create() function that uses dynamic allocation 286	enums tracking values stored in 256–259
strerror() function 408	holding sequence of single bits for yes/no values 261
string.h header file 86	in memory 226
more information about functions in 95	nesting 227
string literals 13	pointer notation 241
char pointer set to, avoiding 76	pointers to 239
important points about 79	reading fields with . (dot) operator 222
inability to update 72	recursive structures 271, 294
strings 11, 83–102	summary of important points 562
array of arrays versus array of pointers 98	updating 236
BE the Compiler exercise, jukebox program (example) 91	using bitfields in customer satisfaction survey (example) 264
changing, using copy for 74	using with unions 249
as character arrays 12	values separated with semicolon (;) 255
code shuffling letters in 69–72	wrapping parameters in 221

structured data types. See structs	threads 501–522
switch statements 26	creating 506
rewriting code to replace sequence of if statements 27	using pthread_create() 507
summary of important points about 28	C toolbox 521
symbols, storing in enums 255	deciding where to put locks in code (example) 516-
system calls 398, 427	519
accept() function 471	important points about 520
avoiding writing duplicate code for error handling 434	multithreaded programs 505
checking for errors on 474-477	mutexes 513
exec() functions 404-410	passing long values to thread functions 515
failures of 408	program counting down beers (example) 509–511
order-generation program, Starbuzz coffee (example) 412–415	single threads of execution 504 summary of important points 573
program searching many RSS feeds at once (example) 418	thread safety in code 512 using mutex to control execution 514
fork() function, cloning processes with 420	timers for processes 459
getenv() function, reading environment variables 407	transformations 535
important points about 411	true and false values 19
listen() function 471	typedef command
mkfifo() function 450	creasting aliases for structs 232
running child process with fork() and exec() 421–426 security breaches 402	recursive structures and 271
system() function 398, 426, 427	- T
exec() function versus 411	
opening a web page in a browser 446	. 040,000,500
	unions 246, 260, 563
	enums tracking values stored in 256–259
1	important points about 265
tab character, beginning recipe lines for makefiles 200, 202	reuse of memory space 247
target files 198	setting value of 248
describing in makefiles 200	using with structs 249
taskmgr command (Windows) 404	values separated with semicolon (;) 255
tasks, sequential or parallel 502	values stored in, data types of 254
telnet program 468	unistd.h header 149
ternary operator (?:) 540	unsigned keyword, prefixing data types with 164
testing, automated 545	URLs, opening on various operating systems in web browser 446

V	websites for C 552
	WEXITSTATUS() macro 441
valgrind tool, using to find memory leaks 302-308	while loops 29
values	modifying in card counting program to keep running count 35, 37
copied when assigning structs 238	structure of 30
matching data type to type of variable it's stored in 163	summary of important points 39
parameters passed to functions 238	window, creating in OpenCV 393
storing short-range values in bitfields 262	Windows systems. See also operating systems
variables	CreateProcess() function instead of fork() 426
matching data type for value stored in 163	.exe files 10
sharing among code files 186	fork() function and 420, 426
storage in memory 43	GUI libraries 551
using to shorten makefiles 548	ipconfig command 409
variadic functions 343–349	listing processes running on system 404
writing example function 347-349	make tools 199
virtual memory size 403	telnet program, built-in versus Cygwin versions 468
void functions 33, 39	
void pointers 327, 506	X
1-7	XOR encryption 182

XOR operator, bitwise XOR (^) 541



waitpid() function 438–440 important points about 441 parameters 439 warnings, gcc 547 web browsers, opening a web page in 446

